


THREAD	SERIES	K/J/2J	X	H / HLZ	T	I	A	B	R	P	F	L	G	S7	S8	S18	SV
BSP HOSE TAILS																	
BSP Female Straight		6	42	57	75	-	101	-	107	113	121	-	-	130	140	-	-
BSP Flat Face Female Straight		8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BSP Female JIS (Mitsubishi)		36	-	-	86	-	-	-	-	-	-	-	-	-	-	-	-
BSP Female 45°		6	42	57	75	-	-	-	107	-	122	-	-	-	-	-	-
BSP Female 90° Swept		7	43	58	76	-	-	-	107	-	122	-	-	-	-	-	-
BSP Female 90° Compact		7	-	-	-	-	-	-	-	113	122	-	-	130	140	-	-
BSP Taper Male Straight		9	43	58	76	-	101	-	108	114	121	126	-	-	-	-	-
BSP Parallel Male Straight		8	-	-	-	-	-	-	-	113	-	125	-	-	-	-	-
BSP Male 90° Tapered & Parallel		-	-	-	-	-	-	-	-	-	-	126	-	-	-	-	-
BSP Banjos Straight		10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NPT HOSE TAILS																	
NPSM Female Straight		11	-	-	77	-	-	-	-	-	-	-	-	131	141	-	-
NPT Male Straight / Male Swivel		11	44	59	77	97	102	-	111	115	-	-	128	131-132	141	-	149
JIC HOSE TAILS																	
JIC Female Straight Imp. Hex		12	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
JIC Female 45° Elbow Imp. Hex		12	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
JIC Female 90° Elbow Imp. Hex		12	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
JIC Fem. 90° Compact Imp. Hex		13	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
JIC Female Straight		13	45	60	78	89	103	105	109	116	123	-	128	133	142	148	149
JIC Female 45° Elbow		14	45	60	79	89	103	-	109	-	124	-	-	134	-	-	-
JIC Female 90° Elbow		14	46	61	79	89	103	-	110	116	124	-	-	135	143		
JIC Female 45° Compact		15	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
JIC Female 90° Compact		15	-	-	-	-	-	-	-	116	124	-	-	-	-	-	-
JIC Female 90° Elbow Long Drop		16	-	-	-	-	103	-	110	-	124	-	-	135	-	-	-
JIC Male Straight		16	46	61	78	-	-	-	-	117	123	-	-	134	142	-	-
SAE / UN'O' HOSE TAILS																	
SAE Female Straight		18	-	-	80	-	104	-	111	118	-	-	129	135	144	-	-
SAE Female 45° Elbow		-	-	-	-	-	104	-	-	-	-	-	129	-	-	-	-
SAE Female 90° Elbow		18	-	-	80	-	104	-	-	-	-	-	129	-	-	-	-
SAE Fem. 90° Compact Elbow		-	-	-	-	-	-	-	-	118	-	-	-	-	-	-	-
SAE Male Straight		18	-	-	-	-	-	-	-	118	-	-	-	-	-	-	-
UN'O' Male Straight		17	-	-	-	-	-	-	-	-	-	127	-	-	-	-	-
UN'O' Male 90° Swivel / Positional		17	-	-	-	-	-	-	-	-	-	127	-	-	-	-	-
O-RING FACE SEAL (ORFS)																	
ORFS Female Straight		19	47	62	81	-	-	105	112	-	125	-	-	136	-	-	-
ORFS Female 30°/45° Elbow		20	47	62	82	-	-	-	112	-	-	-	-	-	-	-	-
ORFS Female 90° Elbow		21	47	62	82	-	-	106	112	-	125	-	-	136	-	-	-
ORFS Fem. 90° Elbow L. Drop		21	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ORFS Male Straight		19	-	-	81	-	-	-	-	-	-	-	-	-	-	-	-
Metric Face Seal Straight (Chinese)		27	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
METRIC HOSE TAILS																	
DKL (Light) Female Straight + Multiseal		23	-	-	83	-	-	-	-	-	-	-	-	137	145	-	-
DKL (Light) Female 45° Elbow		23	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DKL (Light) Female 90° Elbow		23	-	-	83	-	-	-	-	-	-	-	-	-	-	-	-
DKL (Light) Male Straight		22	-	-	83	-	-	-	-	-	-	-	-	-	145	-	-
DKS (Heavy) Female Straight		24	48	63	84	97	-	-	-	-	-	-	-	137	146	-	-
DKS (Heavy) Female 45° Elbow		25	49	64	-	-	-	-	-	-	-	-	-	-	-	-	-
DKS (Heavy) Female 90° Elbow		25	49	64	-	-	-	-	-	-	-	-	-	-	-	-	-
DKS (Heavy) Male Straight		24	48	63	84	-	-	-	-	-	-	-	-	137	146	-	-
Metric Standpipe Straight		26	-	-	84	-	-	-	-	-	-	-	-	138	147	-	-
Metric Standpipe 45° Elbow		26	-	-	-	-	-	-	-	-	-	-	-	138	147	-	-
Metric Standpipe 90° Elbow		26	-	-	-	-	-	-	-	-	-	-	-	139	147	-	-
Metric Banjo Straight		27	-	-	85	-	-	-	-	-	-	-	-	-	-	-	-
Metric Face Seal Straight (Chinese)		27	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



	K/J/2J	X	H / HLZ	T	I	932 / 934 954	SF	A	B	R	P	F	L	G	S7	S8	S18
SAE FLANGE HOSE TAILS	Flange O-Rings and Clamps Dimensions Pages 28 / 29																
Code 61 3000 psi																	
Straight	30	50	65	-	-	98	73	-	-	-	-	-	-	-	-	-	-
22° Elbow	30	-	65	-	-	98	-	-	-	-	-	-	-	-	-	-	-
30° Elbow	30	-	65	-	-	98	73	-	-	-	-	-	-	-	-	-	-
45° Elbow	31	50	65	-	-	99	73	-	-	-	-	-	-	-	-	-	-
60° Elbow	31	-	-	-	90	99	73	-	-	-	-	-	-	-	-	-	-
67° Elbow	31	-	-	-		99	-	-	-	-	-	-	-	-	-	-	-
90° Elbow	32	50	66	-	90	100	73	-	-	-	-	-	127	-	-	-	-
110° & 135° Elbows	33	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Code 62 6000 psi																	
Straight, 20° & 30° Elbow	33	51	66/67	-	91/92	-	-	-	-	-	-	-	-	-	-	-	-
45° Elbow	34	52	67	-	93	-	-	-	-	-	-	-	-	-	-	-	-
60° Elbow	-	53	68	-	94	-	-	-	-	-	-	-	-	-	-	-	-
90° Elbow	34	54	69	-	95	-	-	-	106	-	-	-	-	-	-	-	-
Code 62 6000 psi Tapered Flange																	
Straight	35	-	70	-	-	-	-	-	-	-	-	-	-	-	-	-	-
45° Elbow	35	-	70	-	-	-	-	-	-	-	-	-	-	-	-	-	-
90° Elbow	35	-	70	-	-	-	-	-	-	-	-	-	-	-	-	-	-
“SUPERCAT” 6000 psi																	
Straight & 22°	33	51	66/67	-	91/92	-	-	-	-	-	-	-	-	-	-	-	-
30° & 45° Elbows	34	52/53	67/68	-	93	-	-	-	-	-	-	-	-	-	-	-	-
60° & 67° Elbows	34	53 / 54	68 / 69	-	94/95	-	-	-	-	-	-	-	-	-	-	-	-
90° Elbow	34	55	69	-	96	-	-	-	-	-	-	-	-	-	-	-	-
KOMATSU HOSE TAILS																	
Low Pressure Flanges (2 Bolt)																	
Straight	38	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
45° Elbow	38	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
90° Elbow	38	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Standard Pressure Flanges																	
Straight	39	56	71	-	-	-	-	-	-	-	-	-	-	-	-	-	-
45° Elbow	39	56	71	-	-	-	-	-	-	-	-	-	-	-	-	-	-
60° Elbow	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
80° Elbow	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
90° Elbow	39	56	71	-	-	-	-	-	-	-	-	-	-	-	-	-	-
LeTOURNEAU FLANGE																	
Straight	-	-	72	-	-	-	-	-	-	-	-	-	-	-	-	-	-
45° Elbow	-	-	72	-	-	-	-	-	-	-	-	-	-	-	-	-	-
90° Elbow	-	-	72	-	-	-	-	-	-	-	-	-	-	-	-	-	-
SPECIALTY HOSE TAILS																	
JAPANESE	-																
JIS Metric Male. Str (Kobelco)	37	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
JIS Metric Fem. Str. (Komatsu)	37	-	-	86	-	-	-	-	-	-	-	123	-	-	-	-	-
JIS BSP Fem. Str. (Mitsubishi)	37	-	-	86	-	-	-	-	-	-	-	-	-	-	-	-	-
STANDPIPES																	
Metric Straight	26	-	-	84	-	-	-	-	-	-	-	-	-	138	147	-	-
Metric 45° Elbow	26	-	-	-	-	-	-	-	-	-	-	-	-	138	147	-	-
Metric 90° Elbow	26	-	-	-	-	-	-	-	-	-	-	-	-	139	147	-	-
PRESSURE WASHERS																	
Kärcher Tails and Accessories	40	-	-	87	-	-	-	-	-	-	-	-	-	-	-	-	-
High Press. DKS Metric Fem. Str. W/Blast	-	-	-	-	95	-	-	-	-	-	-	-	-	-	-	-	-
EMERGENCY																	
Weld-on Lifesavers	41	-	-	87	-	-	-	-	-	-	119	-	-	-	-	-	-
Hose Joiner (Double ended Tail)	41	-	59	87	-	-	-	-	-	-	119	-	-	-	-	-	-
FERRULES	B Series Pg 105					Non Skive Field Attachable Pg 120					SF Series Pg 73			Interlock Pg 88			
STAPLELOK & SKV / SSKV	Refer to Section U Mining																

HOW TO SPECIFY PIRTEK HOSE TAILS

Hose Tail Part Number C629L-2016X

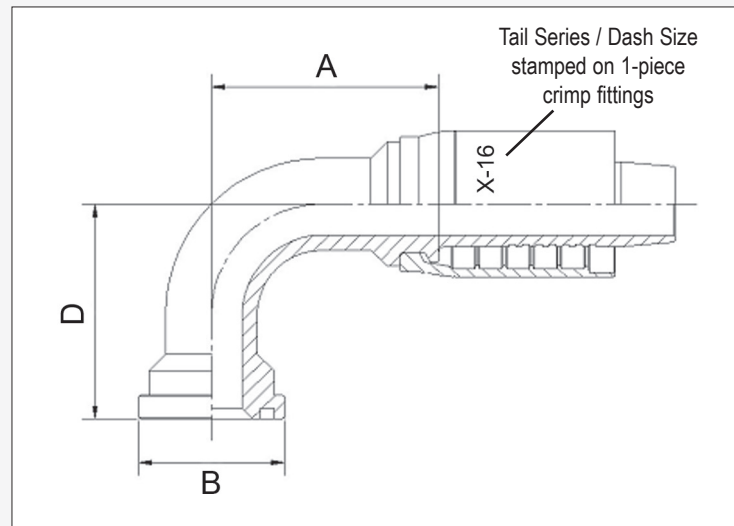

Configuration
C62

Angle
9

Type
L

Fitting Size
20

Hose Size
16

Series
X

End configuration and angle are listed on the next page

1 = straight
2 = 22° bend
3 = 30° bend
4 = 45° bend
6 = 60° bend
7 = 67° bend
9 = 90° bend

L = long drop

C = compact

C = Caterpillar

Defined by type of end connection i.e. thread, flange, tube, banjo etc. See the identification table

- 03 = 3/16" ID
- 04 = 1/4" ID
- 05 = 5/16" ID
- 06 = 3/8" ID
- 08 = 1/2" ID
- 10 = 5/8" ID
- 12 = 3/4" ID
- 16 = 1" ID etc.

A Series
J Series
K Series
P Series
S7 Series
S8 Series
X Series etc.
(Tabulated below)

C62 refers to an SAE Code 62 flange fitting

9=90°bend

L = long drop

Flange OD (Dim. B) = 53.98 mm for size 20 Code 62 flange

Hose ID is 1" for dash 16 hose

X Series suits 1" ID Class 42 hose

Possible combinations of these 3 items are as listed on the next page. Note that for some situations, the position of the 'L' can vary from the example given above.

Hose ID for 100R5 and its variants differ from 1/16" convention. Refer to the specific hose table for details.

Refer to page C 5 or a current crimp chart for the correct selection

K, J, 2J, 3J, R, X, H & T Series Fittings are stamped on the Ferrule of the Hose Tail as illustrated above












Tail Series	Application	Tail Series	Application	Tail Series	Application
K / J / 2J / 3J B (+ SFB)	Braided & multi-spiral hoses for general use. (B Series 2 piece)	A / R	SAE 100R5 dimensioned hoses A = field attachable, R = crimp	S7	Synflex tail for SAE 100R7 dimensioned thermoplastic hose
X / H / HLZ / U	More demanding multi-spiral applications	P	Push-on fitting for low pressure textile braided hoses	S8	Synflex tail for SAE 100R8 dimensioned thermoplastic hose
T	STH, MPH and thermoplastic hoses	F	Field attachable for SAE 1-wire and 2-wire dimensioned hoses	S18	Synflex tail new generation SAE 100R18 thermoplastic hose
I	Interlock attachment for extreme multi-spiral applications	L	Low pressure tail for suction and return hoses (clamp required)	SV	Suits high performance Synflex hoses (restrictions apply)
932 / 934 / 954	Large bore hoses	G	Gas hoses	See a pictorial representation of the various Tail Series overleaf	
		SF	Suction Tail - R4HT		

QUICK GUIDE TO PIRTEK PRODUCT CODES

All codes require size information and the appropriate hose tail Series (Suffix) to allow a complete Product Code to be assembled. See page C 1 for a guide to ordering

Type of Fitting	Straight			Elbow Fitting						
	Unthreaded	Male	Female	22°	30°	45°	60°	67°	90°	90° Long
Banjo BSP	BB1									
Banjo Metric	BM1									
BSP Flat Face			BFF1							
BSPP		BPM1	BF1			BF4			BF9	BFL9 †
BSPP Compact									BFC9	
BSPT		BTM1								
JIC		JM1	JF1			JF4			JF9	JFL9
JIC Compact						JFC4			JFC9	
JIC Imperial Hex.			JFIH1			JFIH4			JFIH9	
JIC Imp. Hex Compact									JFCIH9	
JIS / BSP (Mitsubishi)			JBF1							
JIS / Metric (Komatsu)			JMF1			JMF4			JMF9	
Kärcher	KT1									
Kobelco		KOBM1								
Metric GAZ (French)										
Metric heavy (DKS / DKO)		DSM1	DSF1			DSF4			DSF9	
Metric Multi Seal (DKL)			DMSF1							
Metric light (DKL)		DLM1	DLF1			DLF4			DLF9	
Metric Face Seal (Chinese)			MOF1							
NPT		NM1	NF1							
ORFS		OM1	OF1			OF4			OF9	OFL9
SAE		SM1	SF1			SF4			SF9	
SAE Compact									SFC9	
SAE Inverted Flare swivel										
SAE Flange Code 61 3000 psi	C611			C612	C613	C614	C616	C617	C619	C619L
SAE Flange Code 62 6000 psi	C621			C622	C623	C624	C626	C627	C629	C629L
'Supercat' Flange 6000 psi	C621C			C622C	C623C	C624C	C626C	C627C	C629C	
JIS Flange (Komatsu)	As for SAE Flange Code 61 except with 'K' prefix. Example: KC611									
Joiner (2-ended hose tail)	HJ									
Standpipe Imperial	SP11					SPI4			SPI9	
Standpipe Metric	SPM1					SPM4			SPM9	
SKV										
SSKV										
Staple Lock	SLM1					SLM4			SLM9	
Staple Lock Super	SSLM1									
UNO (SAE O-Ring Boss)		UNM1							UNM9	
UNO Swivel		UMS1								
Weld on Tail (Lifesaver)	WO1									

HOSE TAIL SERIES PHYSICAL APPEARANCE

			
K/J/2J/3J/R	T	X/H/HLZ/U	F
			
A	P	L	932/934/954
			
I	G/S7/S8	SV	SF / B / INDUST

Note that the Industrial tails (INDUST above) are not documented in this Catalogue. Please consult Mining or Industrial Fittings Sections for details.

SF & B Series Tails resemble Industrial Tails and require a separate Ferrule



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

QUICK GUIDE TO HOSE TAIL SERIES

The hose tail Series documented here represent the Suffix of the Product Code (Page C 1) Please consult current published Crimp Charts for the most recent Technical Data

Hose Product Code	dia size DN	Hose Dimension													
		-02	-03	-04	-05	-06	-08	-10	-12	-16	-20	-24	-32	-40	-48
		1/8"	3/16"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"
HTAB				R	R	R	R	R	R						
HTFH										R	R	R			
IROFSD												932	J/932	J/954	934
MPH				P	P	P/T	P/T	P/T	P	P					
IRFAW *												U	U	J	J.
IRFWSHD*												J			U
IRRF				T*	T*	T*	T*			T*					
R4HT									J	J	J	J	J	J	SF
100R5HT				A/R	A/R/K*	A/R/K*	A/R/K*	A/R/J*	A/R/K*	A/R	A/R	A/R	A/R		
JW210 (A)				K		K									
JW250 (A)				K		K									
JW400 (A)						K									
R1AT				K		K	K		J,2J	J	J/2J	J/2J	J/2J	954	
R2AT				K		K	K	K	J,2J	J	J/2J	J/2J	J/2J	954	
2SC														J/954	934
R2ATHT				K		K	K	K	J,2J	J	J/2J	J/2J	J/2J		
C21													J/2J/X		
C25/ PC25/ PC28								K	J,2J	J	J/2J/X	J/2J/X			
C35/ PC35					K	K/J	K/J	K	J/2J/H/I	J/X/I	X/I	X/I	X/I	X/I	
C42 / PC42				K		K/J	K/J	J	X/H/I	J/X/I	H/X/I	H/X/I	HLZ		
C45								B/SFB							
PE2				K		K/2J	K	K	2J	J/2J					
PE4						K/2J	K/2J		2J	J/2J	J/X				
PE6											H/X	H/X			
LPG					G (-06)										
JBF40														J/BSMS	
R12C						K	K	K	J/2J/X	J/X	J/2J/X	J/2J/X	J/2J/X		
R13C									X	X	X/I	X/I	X/I		
WB1000									I/IFWB						
WB1100								I/IFWB							
3130			S7/T	S7/T	S7/T	S7/T	S7/T		S7/T	S7/T					
3800			S7	S7		S7	S7								
30CT, 3360				S7/T	S7/T	S7/T	S7/S8/T	S18							
37AL				S7/T		S7/T	S7/T								
3840			S7	S7		S7	S7								
3E80				S8		S8	S8								
3R80			S8	S8		S8	S8		S8	S8					
3VEO				SV		SV		Assembly only by accredited personnel							
TP1W			T	T	T	T	T								
TP2W				K		K	K								
TPR7/NC		T	T	T	T	T	T								
TPR8/NC							T								
STH			T	T	T	T	T	T	T	T					

* Denotes that the 1/16" Dash Size convention is not applicable for these Products

NOTE: A hose Insertion Depth Tool is available Product Code **HIT-20** and is an Ex-Stock Item



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice


BSP

ORIGIN: GREAT BRITAIN



BF1

BSPP FEMALE STRAIGHT

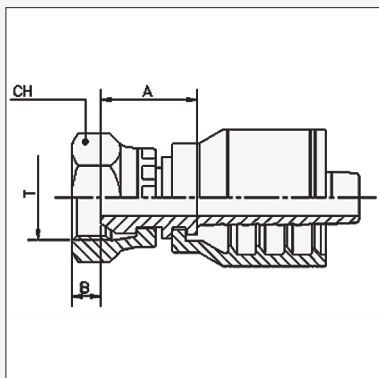


Product Code	BSPP Thread		Nominal ID			Dimensions mm			
	T	Size	DN	Inch	Dash	A	B	CH	
BF1-0204K	1/8" - 28	02	6	1/4"	04	21.5	5.5	14	
BF1-0404K *	1/4" - 19	04	6	1/4"	04	17.5	4.2	19	
BF1-0604K	3/8" - 19	06	6	1/4"	04	18.5	6	22	
BF1-0605K †	3/8" - 19	06	8	5/16"	05	18.5	6	22	
BF1-0805K †	1/2" - 14	08	8	5/16"	05	20.5	7	27	
BF1-0406K	1/4" - 19	04	10	3/8"	06	17.8	4.2	19	
BF1-0606K *	3/8" - 19	06	10	3/8"	06	18.5	6	22	
BF1-0806K	1/2" - 14	08	10	3/8"	06	20.5	6.5	27	
BF1-0608K	3/8" - 19	06	12	1/2"	08	19	6	22	
BF1-0808K *	1/2" - 14	08	12	1/2"	08	21	6.5	27	
BF1-1008K	5/8" - 14	10	12	1/2"	08	18.5	9.5	27	
BF1-1208K	3/4" - 14	12	12	1/2"	08	23.3	8.7	32	
BF1-1010K	5/8" - 14	10	16	5/8"	10	18	9.5	27	
BF1-1210K	3/4" - 14	12	16	5/8"	10	21.3	8.7	32	
BF1-1212J	3/4" - 14	12	20	3/4"	12	23.3	8.7	32	
BF1HD-1212J ‡	3/4" - 14	12	20	3/4"	12	23.3	8.7	32	
BF1-1612J *	1" - 11	16	20	3/4"	12	29.5	10.5	38	
BF1-1616J *	1" - 11	16	25	1"	16	29.6	10.5	38	
BF1HD-1616J *‡	1" - 11	16	25	1"	16	29.6	10.5	38	
BF1-2016J *	1.1/4" - 11	20	25	1"	16	39	10	50	
BF1-2020J *	1.1/4" - 11	20	32	1.1/4"	20	37.8	10	50	
BF1HD-2020J *‡	1.1/4" - 11	20	32	1.1/4"	20	37.8	10	50	
BF1-2424J *	1.1/2" - 11	24	38	1.1/2"	24	35.8	12	55	
BF1-3232J *	2" - 11	32	50	2"	32	37.6	16	70	

* Free Nut version. † Available only to special order ^a Thrust wired nut version

‡ Heavy duty hammer coupling. O-Ring incorporated in seal, and thicker tail. Uses high strength carbon steel. O-Ring replacement Product Codes **BO-12, BO-16, BO-20**

BF4

BSPP FEMALE 45° ELBOW

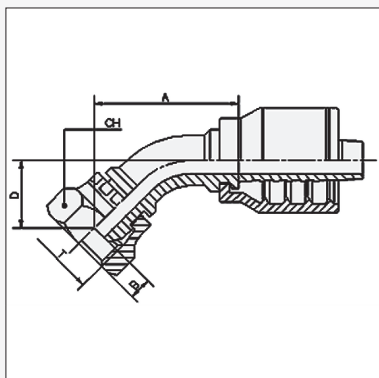


Product Code	BSPP Thread		Nominal ID			Dimensions mm			
	T	Size	DN	Inch	Dash	A	B	CH	D
BF4-0404K *	1/4" - 19	04	6	1/4"	04	31.5	4.2	19	13
BF4-0604K	3/8" - 19	06	6	1/4"	04	34.2	6	22	14.4
BF4-0606K *	3/8" - 19	06	10	3/8"	06	39	6	22	15
BF4-0808K *	1/2" - 14	08	12	1/2"	08	46	6.5	27	18
BF4-1010K	5/8" - 14	10	16	5/8"	10	61.5	9.5	27	22.8
BF4-1212J	3/4" - 14	12	20	3/4"	12	69.6	8.7	32	28.3
BF4-1616J ^a	1" - 11	16	25	1"	16	85	10.5	38	32
BF4-2020J ^a	1.1/4" - 11	20	32	1.1/4"	20	106.4	10	50	37.7
BF4-2424J ^a	1.1/2" - 11	24	38	1.1/2"	24	132.4	12	55	51.5
BF4-3232J ^a	2" - 11	32	50	2"	32	147.5	16	70	60



BF9

BSPP FEMALE 90° ELBOW

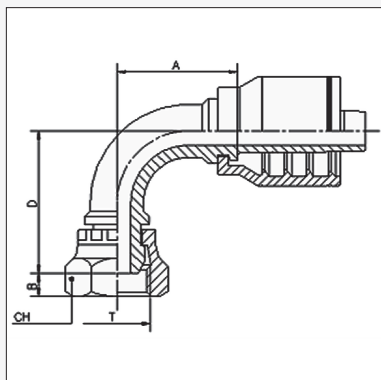


Product Code	BSPP Thread		Nominal ID			Dimensions mm			
	T	Size	DN	Inch	Dash	A	B	CH	D
BF9-0404K *	1/4" - 19	04	6	1/4"	04	27.5	4.2	19	27
BF9-0604K *	3/8" - 19	06	6	1/4"	04	27.5	6	22	29.5
BF9-0606K *	3/8" - 19	06	10	3/8"	06	32.5	6	22	30
BF9-0806K *	1/2" - 14	08	10	3/8"	06	32.5	6.5	27	32
BF9-0808K *	1/2" - 14	08	12	1/2"	08	39	6.5	27	36.5
BF9-1010K	5/8" - 14	10	16	5/8"	10	46.5	9.5	27	49
BF9-1212J	3/4" - 14	12	20	3/4"	12	62.5	8.7	32	58.8
BF9-1612J	1" - 11	16	20	3/4"	12		10.5	38	
BF9-1616J ^a	1" - 11	16	25	1"	16	73	10.5	38	71
BF9-2020J ^a	1.1/4" - 11	20	32	1.1/4"	20	91.5	10	50	83
BF9-2424J ^a	1.1/2" - 11	24	38	1.1/2"	24	114	12	55	108
BF9-3232J ^a	2" - 11	32	50	2"	32	130	16	70	128

* Free Nut version. ^a Thrust wired nut version

BFC9

BSPP FEMALE 90° COMPACT ELBOW

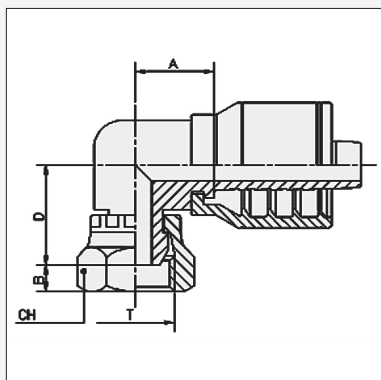

Product Code	BSPP Thread		Nominal ID			Dimensions mm			
	T	Size	DN	Inch	Dash	A	B	D	CH
BFC9-0404K	1/4" - 19	04	6	1/4"	04	17.5	6.5	23.5	19
BFC9-0606K	3/8" - 19	06	10	3/8"	06	21.5	6.5	25.5	22
BFC9-0808K	1/2" - 14	08	12	1/2"	08	25.5	9	28	27
BFC9-1212J	3/4" - 14	12	20	3/4"	12	35.7	9	36	32
BFC9-1616J	1" - 11	16	25	1"	16	32	10.5	34.5	38


BSP

ORIGIN: GREAT BRITAIN



BFF1


BSPP FLAT FACE FEMALE STRAIGHT

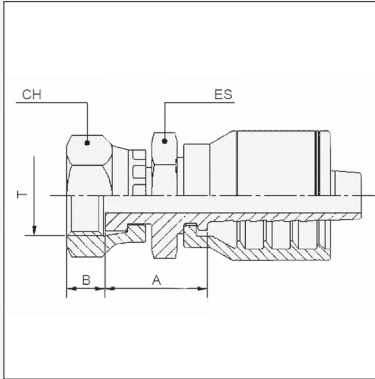

Product Code	BSPP Thread		Nominal ID			Dimensions mm			
	T	Size	DN	Inch	Dash	A	B	CH	
BFF1-0606K	3/8" - 19	06	10	3/8"	06	15.7	9	22	
BFF1-0806K	1/2" - 14	08	10	3/8"	06	16	10.5	27	
BFF1-0808K	1/2" - 14	08	12	1/2"	08	16.5	10.5	27	
BFF1-1212J	3/4" - 14	12	20	3/4"	12	20.5	11.5	32	
BFF1-1616J	1" - 11	16	25	1"	16	25	15	38	

BPM1

BSPP MALE STRAIGHT

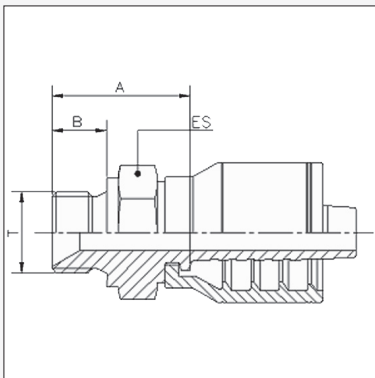

Product Code	BSPP Thread		Nominal ID			Dimensions mm		
	T	Size	DN	Inch	Dash	A	B	ES
BPM1-0404K	1/4" - 19	04	6	1/4"	04	26.5	11	19
BPM1-0604K	3/8" - 19	06	6	1/4"	04	28.5	12	22
BPM1-0605K	3/8" - 19	06	8	5/16"	05	28.5	12	22
BPM1-0606K	3/8" - 19	06	10	3/8"	06	28.5	12	22
BPM1-0806K	1/2" - 14	08	10	3/8"	06	28	12	22
BPM1-0808K	1/2" - 14	08	12	1/2"	08	34	14	27
BPM1-0812J	1/2" - 14	8	20	3/4"	12	34.5	14	27
BPM1-1212J	3/4" - 14	12	20	3/4"	12	38	16	32
BPM1-1216J	3/4" - 14	12	25	1"	16	39	16	32
BPM1-1612J	1" - 11	16	20	3/4"	12	41	19	41
BPM1HD-1612J ‡	1" - 11	16	20	3/4"	12	41.5	19	41
BPM1-1616J	1" - 11	16	25	1"	16	43	19	41


* Free Nut version. † Available only to special order ^a Thrust wired nut version

‡ Heavy duty hammer coupling. Thicker and high strength carbon steel.

* Available in Stainless Steel, add SS to part number e.g. BPM1SS-0404K

BPMS1

BSPP MALE SWIVEL STRAIGHT

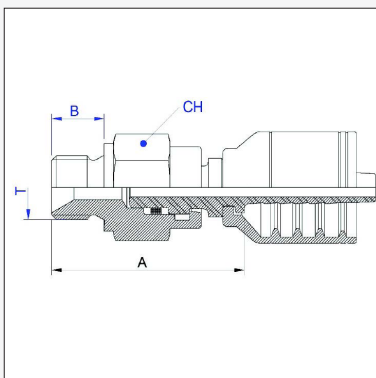


Product Code	BSPP Thread		Nominal ID			Dimensions mm		
	T	Size	DN	Inch	Dash	A	B	CH
BPMS1-0404K	1/4" - 19	04	6	1/4"	04	40.3	11.0	19
BPMS1-0606K	3/8" - 19	6	10	3/8"	06	44.5	12.0	22
BPMS1-0808K	1/2" - 14	8	12	1/2"	08	54.0	14.0	27



BTM1

BSPT MALE STRAIGHT

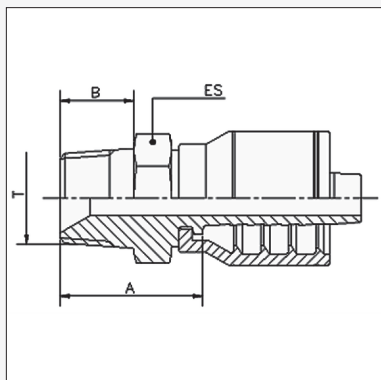

Product Code	BSPT Thread		Nominal ID			Dimensions mm			
	T	Size	DN	Inch	Dash	A	B	ES	
BTM1-0204K	1/8" - 28	02	6	1/4"	04	20.2	9.7	12	
BTM1-0404K	1/4" - 19	04	6	1/4"	04	26.5	14	14	
BTM1-0604K	3/8" - 19	06	6	1/4"	04	29	15	19	
BTM1-0406K	1/4" - 19	04	10	3/8"	06	24.5	14	14	
BTM1-0606K	3/8" - 19	06	10	3/8"	06	29	15	19	
BTM1-0806K	1/2" - 14	08	10	3/8"	06	32	18	22	
BTM1-0608K	3/8" - 19	06	12	1/2"	08	27.5	15	19	
BTM1-0808K	1/2" - 14	08	12	1/2"	08	32.5	18	22	
BTM1-1208K	3/4" - 14	12	12	1/2"	08	37	20	27	
BTM1-1010K	5/8" - 14	10	16	5/8"	10	33	16	24	
BTM1-1210K	3/4" - 14	12	16	5/8"	10	42	20	27	
BTM1-1212J	3/4" - 14	12	20	3/4"	12	39	20	27	
BTM1-1612J	1" - 11	16	20	3/4"	12	47	23	36	
BTM1-1616J	1" - 11	16	25	1"	16	48.1	23	36	
BTM1-2020J	1.1/4" - 11	20	32	1.1/4"	20	52.9	25	46	
BTM1-2424J	1.1/2" - 11	24	38	1.1/2"	24	53	28	50	
BTM1-3232J	2" - 11	32	50	2"	32	56.7	28	60	


BSP BANJOS

ORIGIN: GREAT BRITAIN



BB1


BSPP BANJO STRAIGHT

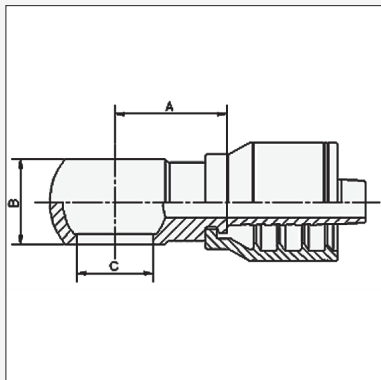

Product Code	BSPP Thread		Nominal ID			Dimensions mm			
	T	Size	DN	Inch	Dash	A	B	C	
BB1-0404K	1/4" - 19	04	6	1/4"	04	22	14	13.2	
BB1-0606K	3/8" - 19	06	10	3/8"	06	24	18	16.7	
BB1-0808K	1/2" - 14	08	12	1/2"	08	27	22	21	
BB1-1010K	5/8" - 14	10	16	5/8"	10	28	24	22.9	
BB1-1212J	3/4" - 14	12	20	3/4"	12	38	29	26.5	
BB1-1616J	1" - 11	16	25	1"	16	46.1	37	33.3	

BBB


BSPP BANJO BOLT

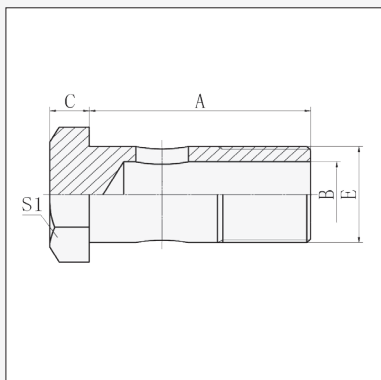

Product Code	Bolt Thread		Dimension (mm)				
	E	Size	A	B	C	S1	E
BBB-02	1/8" - 28	02	29.5	4.8	4.8	14	9.7
BBB-04	1/4" - 19	04	28.5	6	6	19	13.2
BBB-06	3/8" - 19	06	38.5	9	7	22	16.7
BBB-08	1/2" - 14	08	44	13	8.5	27	21
BBB-10	5/8" - 14	10	48.5	15	10	30	22.9
BBB-12	3/4" - 14	12	56	18	10	32	26.5
BBB-16	1" - 11	16	68.5	22	13	41	33.3

NPT


ORIGIN: NORTH AMERICA

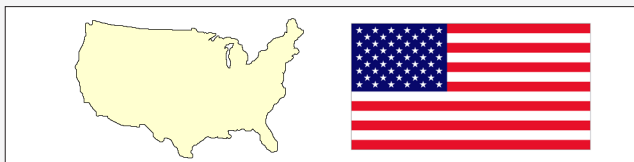

K, J, 2J SERIES

NF1

NPSM FEMALE STRAIGHT

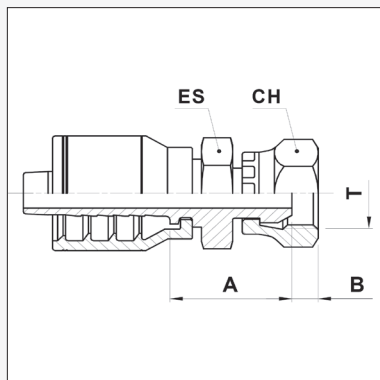


Product Code	NPSM Thread		Nominal ID			Dimensions mm			
	T	Size	DN	Inch	Dash	A	B	CH	ES
NF1-0404K	1/4" - 18	04	6	1/4"	04	24	4.2	19	19
NF1-0606K	3/8" - 16	06	10	3/8"	06	26.5	5.7	22	22
NF1-0808K	1/2" - 14	08	12	1/2"	08	29	6.9	27	22
NFF1-0606K †	3/8" - 18	06	10	3/8"	06	28	12.7	22	

† Fixed Head Style

NM1/NMS1

NPT MALE STRAIGHT


NPT MALE SWIVEL STRAIGHT

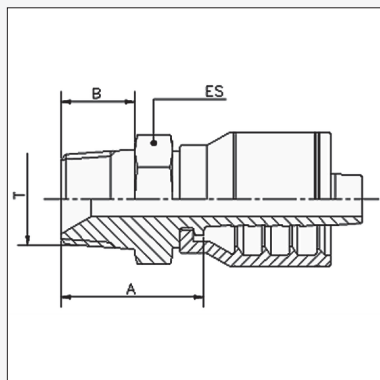

Product Code	NPT Thread		Nominal ID			Dimensions mm			
	T	Size	DN	Inch	Dash	A	B	ES	
NM1-0204K	1/8" - 27	02	6	1/4"	04	22	9.5	14	
NM1-0404K	1/4" - 18	04	6	1/4"	04	26.5	14	14	
NM1-0604K	3/8" - 18	06	6	1/4"	04	28	14	19	
NM1-0406K	1/4" - 18	04	10	3/8"	06	26.5	14	17	
NM1-0606K	3/8" - 18	06	10	3/8"	06	28	14	19	
NM1-0806K	1/2" - 14	08	10	3/8"	06	33	19	22	
NM1-0608K	3/8" - 18	06	12	1/2"	08	28.5	14	19	
NM1-0808K	1/2" - 14	08	12	1/2"	08	33.5	19	22	
NM1-1212J	3/4" - 14	12	20	3/4"	12	43	19	27	
NM1-1616J	1" - 11½	16	25	1"	16	49.1	24	36	
NM1-2020J	1.1/4" - 11½	20	32	1.1/4"	20	62.9	24.5	46	
NM1-2424J	1.1/2" - 11½	24	38	1.1/2"	24	64	25.5	50	
NM1-3232J	2" - 11½	32	50	2"	32	76.7	26	65	
NMS1-0808K	1/2" - 14	08	12	1/2"	08	42	19	27	

NM1E

NPT EXTENDED MALE STRAIGHT

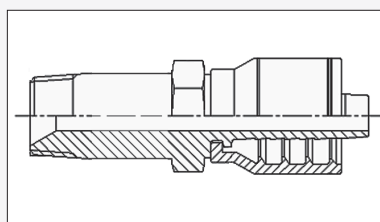

Product Code	NPT Thread		Nominal ID			Dimensions mm			
	T	Size	DN	Inch	Dash	A	B	ES	
NM1E-0404K	1/4" - 18	04	6	1/4"	04	36.5	21.5	14	
NM1E-0604K	3/8" - 18	06	6	1/4"	04	38	21.5	19	
NM1E-0606K	3/8" - 18	06	10	3/8"	06	38	21.5	19	



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

NPT FITTINGS

11
C


JIC FITTINGS

ORIGIN: NORTH AMERICA



JFIH1

JIC FEMALE STRAIGHT
IMPERIAL HEX

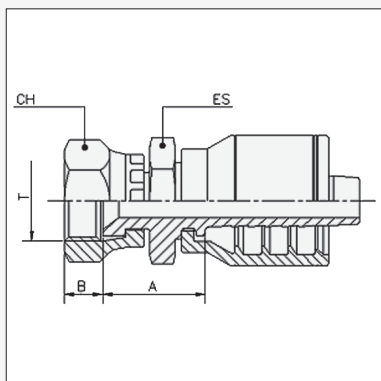


Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	ES
JFIH1-0704K *	7/16" - 20	07	04	6	1/4"	04	20.8	8.5	14.29	14
JFIH1-0904K	9/16" - 18	09	06	6	1/4"	04	21.5	9.5	17.46	14
JFIH1-0906K	9/16" - 18	09	06	10	3/8"	06	24	9.5	17.46	17
JFIH1-0906J	9/16" - 18	09	06	10	3/8"	06	24	9.5	17.46	17
JFIH1-1206K *	3/4" - 16	12	08	10	3/8"	06	25.9	10.7	22.22	19
JFIH1-1208K *	3/4" - 16	12	08	12	1/2"	08	25.4	10.7	22.22	19
JFIH1-1408K *	7/8" - 14	14	10	12	1/2"	08	25.4	12.7	27	22

* Obsolete - refer to JF1

JFIH4

JIC FEMALE 45° ELBOW
IMPERIAL HEX

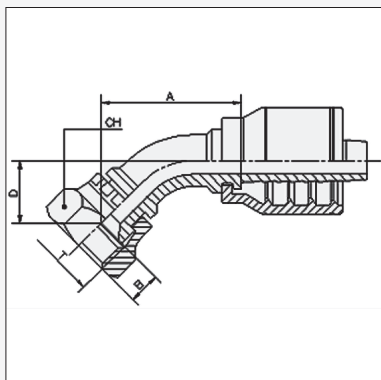


Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	D
JFIH4-0704K *	7/16" - 20	07	04	6	1/4"	04	36	8.5	14.29	14
JFIH4-0904K	9/16" - 18	09	06	6	1/4"	04	34.5	9.5	17.46	14.5
JFIH4-0906K	9/16" - 18	09	06	10	3/8"	06	44.5	9.5	17.46	11.5
JFIH4-1206K *	3/4" - 16	12	08	10	3/8"	06	34.5	10.7	22.22	15
JFIH4-1208K *	3/4" - 16	12	08	12	1/2"	08	43.2	10.7	22.22	13.8

* Obsolete - refer to JF4

JFIH9

JIC FEMALE 90° ELBOW
IMPERIAL HEX

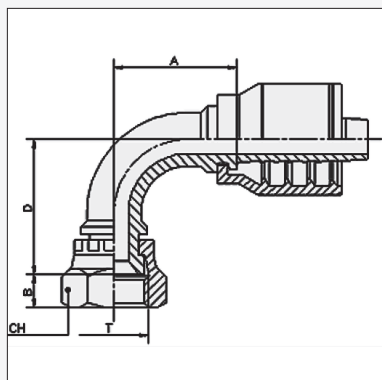

Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	D
JFIH9-0704K *	7/16" - 20	07	04	6	1/4"	04	28.5	8.5	14.29	26.5
JFIH9-0904K	9/16" - 18	09	06	6	1/4"	04	27.5	9.5	17.46	32
JFIH9-0906K	9/16" - 18	09	06	10	3/8"	06	31	9.5	17.46	32
JFIH9-1206K *	3/4" - 16	12	08	10	3/8"	06	31.5	10.7	22.22	39
JFIH9-1208K *	3/4" - 16	12	08	12	1/2"	08	41	10.7	22.22	42

* Obsolete - refer to JF9

JIC FITTINGS


ORIGIN: NORTH AMERICA



K, J, 2J SERIES

JFCIH9

JIC FEMALE 90° COMPACT ELBOW
IMPERIAL HEX

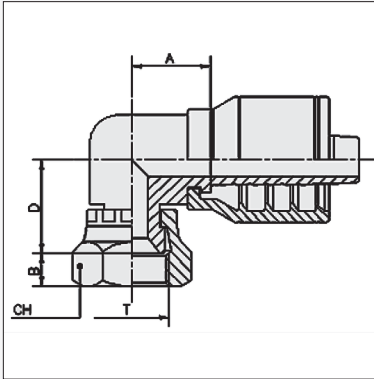


Product Code	JIC Thread			Hose Bore			Dimensions m(m)			
	T (Thread)	Size	T (Tube)	DN	Inch	Size	A	B	CH	D
JFCIH9-0704K*	7/16"-20	07	04	6	1/4"	04	17.5	8.5	14.29	20.5
JFCIH9-0904K	9/16" - 18	09	06	6	1/4"	04	17.5	8.5	17.46	25.5
JFCIH9-0906K	9/16" - 18	09	06	10	3/8"	06	21.5	8.5	17.46	25.5
JFCIH9-1206K*	3/4"-16	12	08	10	3/8"	06	21.5	10.5	22.22	26.5
JFCIH9-1208K*	3/4"-16	12	08	12	1/2"	08	25.5	9.5	22.22	29.5

* Obsolete - refer to JFC9

JF1

JIC FEMALE STRAIGHT

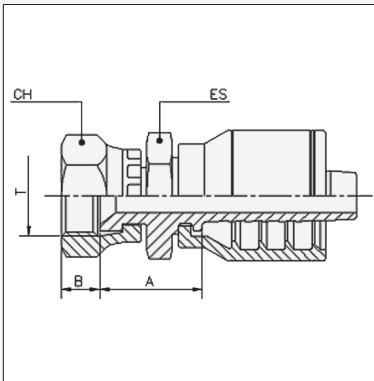

Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	ES
JF1-0704K	7/16" - 20	07	04	6	1/4"	04	20.8	8.5	14	14
JF1-0804K	1/2" - 20	08	05	6	1/4"	04	21.5	10.5	17	14
JF1-1204K	3/4"-16	12	08	06	1/4"	04	18.5	10.3	22	--
JF1-0904K	9/16" - 18	09	06	6	1/4"	04	23	9.5	19	14
JF1-0905K	9/16" - 18	09	06	8	5/16"	05	21	9.5	19	14
JF1-0706K	7/16"-20	07	04	10	3/8"	06	22	8.7	14	17
JF1-0906K	9/16" - 18	09	06	10	3/8"	06	24	9.5	19	19
JF1-0906J	9/16" - 18	09	06	10	3/8"	06	24	9.5	17.46	17
JF1-1206K	3/4" - 16	12	08	10	3/8"	06	25.9	10.7	22	19
JF1-1206J	3/4" - 16	12	08	10	3/8"	06	26	10.7	22	19
JF1-1406K	7/8" - 14	14	06	10	3/8"	06	29.3	12.7	27	22
JF1-0908K	9/16" - 18	09	06	12	1/2"	08	26.5	9.5	19	19
JF1-1208K	3/4" - 16	12	08	12	1/2"	08	25.4	10.7	22	19
JF1-1208J	3/4" - 16	12	08	12	1/2"	08	26.5	10.7	22	19
JF1-1408K	7/8" - 14	14	10	12	1/2"	08	29.8	12.7	27	22
JF1-1408J	7/8" - 14	14	10	12	1/2"	08	28.5	12.7	27	22
JF1-1708K	1.1/16" - 12	17	12	12	1/2"	08	35.5	13.8	32	27
JF1-1410K	7/8" - 14	14	10	16	5/8"	10	29.8	12.7	27	22
JF1-1410J	7/8" - 14	14	10	16	5/8"	10	28.5	12.7	27	22
JF1-1710K	1.1/16" - 12	17	12	16	5/8"	10	35.5	13.8	32	27
JF1-1710J	1.1/16"-12	17	12	16	5/8"	10	34	14.3	32	27
JF1-1412J	7/8" - 14	14	10	20	3/4"	12	37.8	12.7	32	27
JF1-1712J	1.1/16" - 12	17	12	20	3/4"	12	37.5	13.8	32	27
JF1-1912J	1.3/16" - 12	19	14	20	3/4"	12	37.5	15.4	36	30
JF1-2112J	1.5/16" - 12	21	16	20	3/4"	12	37.5	16	38	32
JF1-1716J	1.1/16" - 12	17	12	25	1"	16	38	14.3	32	32
JF1-2116J	1.5/16" - 12	21	16	25	1"	16	36.6	16	38	32
JF1-2616J †	1.5/8" - 12	26	20	25	1"	16	51.7	16	50	41
JF1-2620J †	1.5/8" - 12	26	20	32	1.1/4"	20	38.5	16	50	41
JF1-3024J †	1.7/8" - 12	30	24	38	1.1/2"	24	56.9	18.5	55	50

† Thrust wired nut † † Double thrust wired nut

* Available in Stainless Steel, add SS to Part number, eg JF1SS-1710K



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

JIC FITTINGS

13
C


JIC FITTINGS

ORIGIN: NORTH AMERICA



JF4

JIC FEMALE 45° ELBOW

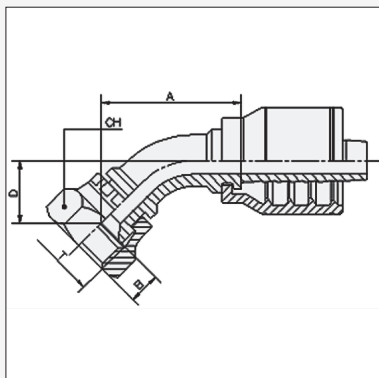


Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	D
JF4-0704K	7/16" - 20	07	04	6	1/4"	04	42	8.5	14	15
JF4-0804K	1/2" - 20	08	05	6	1/4"	04	41.5	10.5	17	15
JF4-0904K	9/16" - 18	09	06	6	1/4"	04	34.5	9.5	19	14.5
JF4-0906K	9/16" - 18	09	06	10	3/8"	06	44.5	9.5	19	11.5
JF4-0906J	9/16" - 18	09	06	10	3/8"	06	33.9	9.5	19	12.1
JF4-1206K	3/4" - 16	12	08	10	3/8"	06	49.4	10.7	22	15
JF4-1206J	3/4" - 16	12	08	10	3/8"	06	42.5	10.7	22	15
JF4-1208K	3/4" - 16	12	08	12	1/2"	08	43.2	10.7	22	13.8
JF4-1208J	3/4" - 16	12	08	12	1/2"	08	40.7	10.7	22	13.8
JF4-1408K	7/8" - 14	14	10	12	1/2"	08	55.5	12.5	27	19
JF4-1408J	7/8" - 14	14	10	12	1/2"	08	48.5	12.5	27	21.2
JF4-1410K	7/8" - 14	14	10	16	5/8"	10	62.5	12.7	27	24
JF4-1410J	7/8" - 14	14	10	16	5/8"	10	61.5	12.7	27	25
JF4-1710K	1.1/16" - 12	17	12	16	5/8"	10	60.5	13.8	32	29t
JF4-1712J	1.1/16" - 12	17	12	20	3/4"	12	71.6	13.8	32	28.3
JF4-2112J	1.5/16" - 12	21	16	20	3/4"	12	69	16	38	29.5
JF4-2116J	1.5/16" - 12	21	16	25	1"	16	85	16	38	32
JF4-2620J †	1.5/8" - 12	26	20	32	1.1/4"	20	99.4	16	50	36.3
JF4-3024J †	1.7/8" - 12	30	24	38	1.1/2"	24	132.4	18.5	55	51.5
JF4-4032J †	2.1/2" - 12	40	32	50	2"	32	147.5	24	75	60

† Thrust wired nut

* Available in Stainless Steel, add SS to Part number, eg JF4SS-1208K

JF9

JIC FEMALE 90° ELBOW

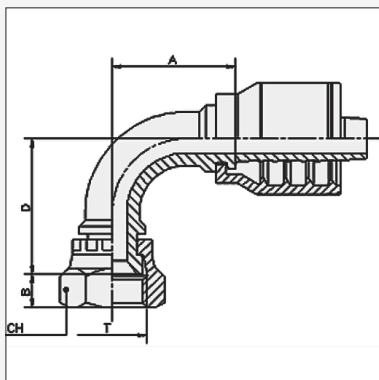

Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
JF9-0704K	7/16" - 20	07	04	6	1/4"	04	32	8.5	30	14
JF9-0804K	1/2" - 20	08	05	6	1/4"	04	29	10.5	30	17
JF9-0904K	9/16" - 18	09	06	6	1/4"	04	27.5	9.5	27.5	19
JF9-0906K	9/16" - 18	09	06	10	3/8"	06	31	9.5	22	19
JF9-0906J	9/16" - 18	09	06	10	3/8"	06	27.8	9.5	23	19
JF9-1206K	3/4" - 16	12	08	10	3/8"	06	31.5	10.7	30	22
JF9-1206J	3/4" - 16	12	08	10	3/8"	06	35	10.7	30	22
JF9-1406K	7/8" - 14	14	10	10	3/8"	06	37.1	12.5	38	27
JF9-1208K	3/4" - 16	12	08	12	1/2"	08	41	10.7	30	22
JF9-1208K-062	3/4" - 16	12	08	12	1/2"	8	39.5	10.7	62	22
JF9-1208J	3/4" - 16	12	08	12	1/2"	08	41.8	10.7	30	22
JF9-1408K	7/8" - 14	14	10	12	1/2"	08	42.5	12.5	40	27
JF9-1408J	7/8" - 14	14	10	12	1/2"	08	36.8	12.5	40.5	27
JF9-1410K	7/8" - 14	14	10	16	5/8"	10	47.5	12.7	49	27
JF9-1410J	7/8" - 14	14	10	16	5/8"	10	54	12.7	52	27
JF9-1708K	1.1/16" - 12	17	12	12	1/2"	08	48.5	13.8	52	32
JF9-1710K	1.1/16" - 12	17	12	16	5/8"	10	48.5	13.8	47.5	32
JF9-1710J	1.1/16" - 12	17	12	16	5/8"	10	54	13.8	55	32
JF9-1412J	7/8" - 14	14	10	20	3/4"	12	56	12.7	55	27
JF9-1712J	1.1/16" - 12	17	12	20	3/4"	12	55.5	13.5	55	32
JF9-1712J-095	1.1/16" - 12	17	12	20	3/4"	12	55	14.3	95	32
JF9-2112J	1.5/16" - 12	21	16	20	3/4"	12	57	16	61	38
JF9-2116J	1.5/16" - 12	21	16	25	1"	16	72	16	71	38
JF9-2616J	1.5/8" - 12	26	20	25	1"	16	74.5	16	75.5	50
JF9-2620J †	1.5/8" - 12	26	20	32	1.1/4"	20	81	16	80	50
JF9-3024J †	1.7/8" - 12	30	24	38	1.1/2"	24	103	18.5	102	55
JF9-4032J †	2.1/2" - 12	40	32	50	2"	32	130	24	133	70

† Thrust wired nut

* Available in Stainless Steel, add SS to Part number, eg JF9SS-0904K

JIC FITTINGS


ORIGIN: NORTH AMERICA



K, J, 2J SERIES

JFC4

JIC FEMALE 45° COMPACT ELBOW

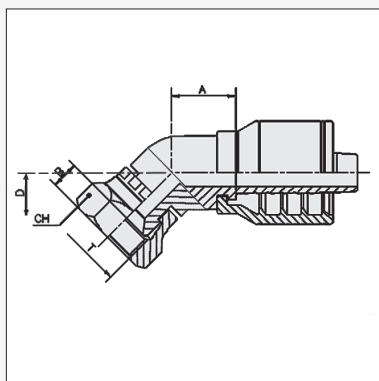


Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
JFC4-0704K	7/16" - 20	07	04	6	1/4"	04	17.5	8.5	13.0	14
JFC4-0904K	9/16" - 18	09	06	6	1/4"	04	17.5	8.5	10.0	19
JFC4-0906K	9/16" - 18	09	06	10	3/8"	06	21.5	8.5	12.0	19
JFC4-1206K	3/4" - 16	12	08	10	3/8"	06	21.5	10.5	10.8	22
JFC4-1208K	3/4" - 16	12	08	12	1/2"	08	25.5	9.5	15.0	22
JFC4-1408K	7/8" - 14	14	10	12	1/2"	08	25.5	13	13.0	27
JFC4-1410K	7/8" - 14	14	10	16	5/8"	10	25.5	13	14.7	27
JFC4-1712J	1.1/16" - 12	17	12	20	3/4"	12	52	13.5	15.0	32
JFC4-2116J	1.5/16" - 12	21	16	25	1"	16	72	16	18.0	38

JIC FITTINGS

JFC9

JIC FEMALE 90° COMPACT ELBOW

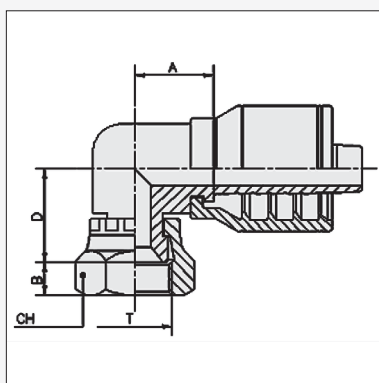

Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
JFC9-0704K	7/16" - 20	07	04	6	1/4"	04	17.5	8.5	20.5	14
JFC9-0904K	9/16" - 18	09	06	6	1/4"	04	17.5	8.5	25.5	19
JFC9-0906K	9/16" - 18	09	06	10	3/8"	06	21.5	8.5	25.5	19
JFC9-1206K	3/4" - 16	12	08	10	3/8"	06	21.5	10.5	26.5	22
JFC9-1208K	3/4" - 16	12	08	12	1/2"	08	25.5	9.5	29.5	22
JFC9-1408K	7/8" - 14	14	10	12	1/2"	08	25.5	13	28	27
JFC9-1410K	7/8" - 14	14	10	16	5/8"	10	25.5	13	28	27
JFC9-1710K	1.1/16" - 12	17	12	16	5/8"	10	25.5	14.5	28	32
JFC9-1712J	1.1/16" - 12	17	12	20	3/4"	12	28.5	13.5	30.7	32
JFC9-2116J	1.5/16" - 12	21	16	25	1"	16	32	16	33.5	38


JIC FITTINGS

ORIGIN: NORTH AMERICA



JFL9

JIC FEMALE LONG DROP 90° ELBOW

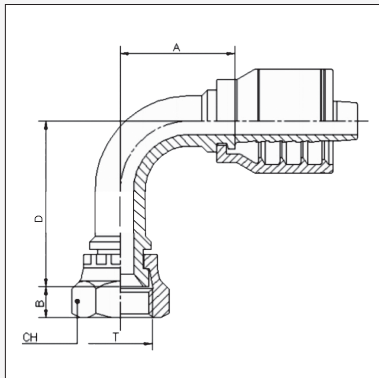


Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
JFL9-0704K	7/16" - 20	07	04	6	1/4"	04	32	8.5	46	14
JFL9-0904K	9/16" - 18	09	06	6	1/4"	04	27.5	9.5	56	19
JFL9-0906K	9/16" - 18	09	06	10	3/8"	06	35.5	9.5	56	19
JFL9-1206K	3/4" - 16	12	08	10	3/8"	06	37.1	10.7	62	22
JFL9-1208K	3/4" - 16	12	08	12	1/2"	08	47.5	10.7	62	22
JFL9-1408K	7/8" - 14	14	10	12	1/2"	08	48.5	12.5	65	27
JFL9-1410K	7/8" - 14	14	10	16	5/8"	10	43.5	12.7	65	27
JFL9-1710K	1.1/16" - 12	17	12	16	5/8"	10	55.5	12.7	95	32
JFL9-1712J	1.1/16" - 12	17	12	20	3/4"	12	52	13.8	95	32
JFL9-2116J	1.5/16" - 12	21	16	25	1"	16	81	16	110	38
JFL9-2620J †	1.5/8" - 12	26	20	32	1.1/4"	20	91.5	16	110	50


† Thrust wired nut

JM1

JIC MALE STRAIGHT

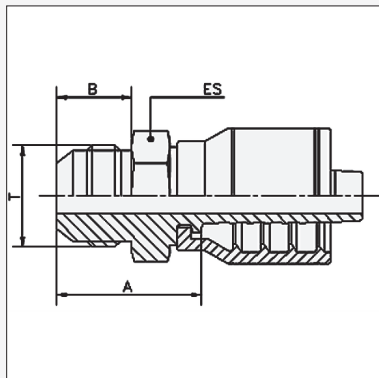


"Product Code"	JIC Thread			Hose Bore			Dimensions mm		
	Thread	Size	Tube	DN	Inch	Size	A	B	ES
JM1-0704K	7/16" - 20	07	04	6	1/4"	04	26.5	14	14
JM1-0804K	1/2" - 20	08	05	6	1/4"	04	26.5	14	14
JM1-0904K	9/16" - 18	09	06	6	1/4"	04	27.5	14	17
JM1-1204K	3/4" - 16	12	08	6	1/4"	04	30.5	16.7	19
JM1-0905K	9/16" - 18	09	06	8	5/16"	05	27.5	14	17
JM1-0906K	9/16" - 18	09	06	10	3/8"	06	27.5	14	17
JM1-0906J	9/16" - 18	09	06	10	3/8"	06	27.5	14	17
JM1-1206K	3/4" - 16	12	08	10	3/8"	06	30.2	16.7	19
JM1-1206J	3/4" - 16	12	08	10	3/8"	06	30.4	16.7	19
JM1-1406K	7/8" - 14	14	10	10	3/8"	06	34.8	19.3	24
JM1-1208K	3/4" - 16	12	08	12	1/2"	08	30.7	16.7	19
JM1-1208J	3/4" - 16	12	08	12	1/2"	08	32.4	16.7	19
JM1-1408K	7/8" - 14	14	10	12	1/2"	08	34.9	19.3	24
JM1-1408J	7/8" - 14	14	10	12	1/2"	08	36	19.3	24
JM1-1708K	1.1/16" - 12	17	12	12	1/2"	08	38.9	21.9	27
JM1-1410K	7/8" - 14	14	10	16	5/8"	10	35.3	19.3	24
JM1-1710K	1.1/16" - 12	17	12	16	5/8"	10	38.9	21.9	27
JM1-1710J	1.1/16" - 12	17	12	16	5/8"	10	39	21.9	27
JM1-1412J	7/8" - 14	14	10	20	3/4"	12	44	19.3	27
JM1-1712J	1.1/16" - 12	17	12	20	3/4"	12	40.9	21.9	27
JM1-1912J	1.3/16" - 12	19	14	20	3/4"	12	46.6	22.6	32
JM1-2112J	1.5/16" - 12	21	16	20	3/4"	12	47.1	23.1	36
JM1-2116J	1.5/16" - 12	21	16	25	1"	16	48.2	23.1	36
JM1-2616J	1.5/8" - 12	26	20	25	1"	16	59.9	24.3	46
JM1-2620J	1.5/8" - 12	26	20	32	1.1/4"	20	62.7	24.3	46
JM1-3024J	1.7/8" - 12	30	24	38	1.1/2"	24	66	27.5	50
JM1-4032J	2.1/2" - 12	40	32	50	2"	32	84.6	33.9	65

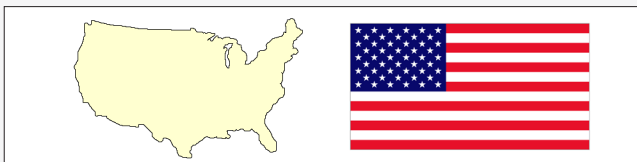

UNMS1


UN'O' MALE STRAIGHT

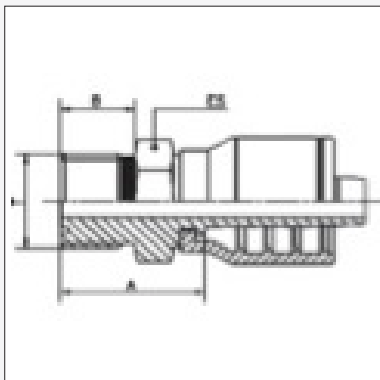

Product Code	UN'O' Thread			Nominal ID			Dimensions mm		
	Thread E	Size	Pipe	Dash	Inch	DN	A	B	ES
UNMS1-1410K	7/8" - 14	14	10	10	5/8"	16	50	12	26

UNMS9

UNO MALE 90° SWIVEL ELBOW

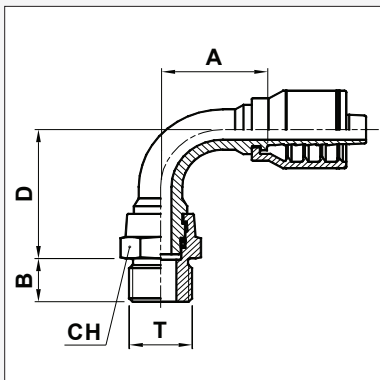

Product Code	UNO Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	D
UNMS9-1206K	3/4" - 16	12	08	10	3/8"	06	34.5	11.1	27	52.4
UNMS9-1208K	3/4" - 16	12	08	12	1/2"	08	44.5	11.1	27	57.4
UNMS9-1408K	7/8" - 14	14	10	12	1/2"	08	44.5	12.7	27	58.8


SAE FITTINGS

ORIGIN: NORTH AMERICA



SF1


SAE FEMALE STRAIGHT

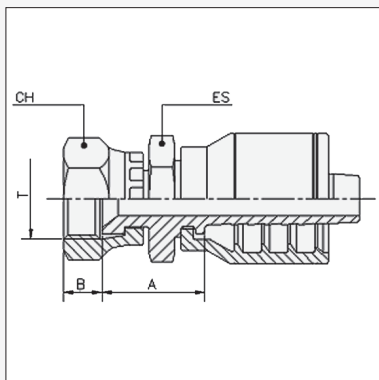

Product Code	SAE Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	ES
SF1-1004K	5/8" - 18	10	06	6	1/4"	04	23.9	10.8	22	19
SF1-1006K	5/8" - 18	10	06	10	3/8"	06	23.9	10.8	22	19
SF1-1712J	1.1/16" - 14	17	12	20	3/4"	12	31.2	14.4	32	27

SF9


SAE FEMALE 90° ELBOW

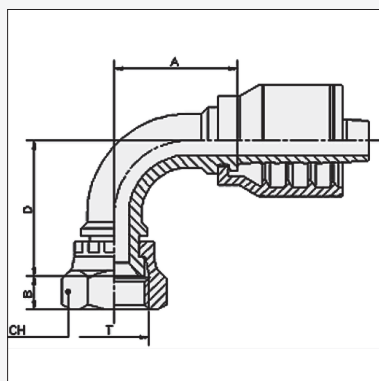

Product Code	SAE Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
SF9-1006K	5/8" - 18	10	06	10	3/8"	06	37	10.8	37	22

SM1

SAE MALE STRAIGHT

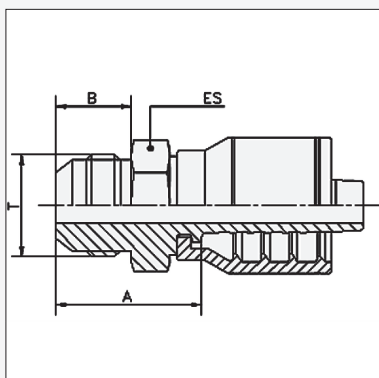

Product Code	SAE Thread			Hose Bore			Dimensions (mm)			
	T (Thread)	Size	Tube	DN	Inch	Size	A	B	ES	
SM1-1006K	5/8" - 18	10	06	10	3/8"	06	29.2	15.7	17	

ORFS FITTINGS

ORIGIN: NORTH AMERICA




K, J, 2J SERIES

ORFS FITTINGS

OF1*

O-RING FACE SEAL FEMALE STRAIGHT

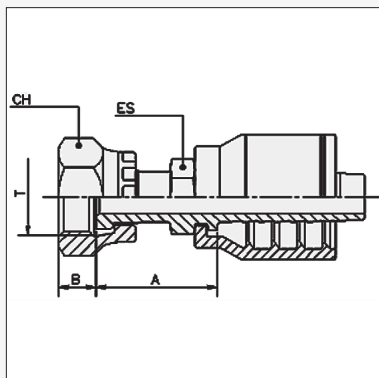


Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	ES
OF1-0404K	9/16" - 18	04	04	6	1/4"	04	28	8	17	14
OF1-0604K	11/16" - 16	06	06	6	1/4"	04	31.5	9.5	22	17
OF1-0606K	11/16" - 16	06	06	10	3/8"	06	32	9.5	22	17
OF1-0804K	13/16" - 16	08	08	6	1/4"	04	36.5	11	24	19
OF1-0806K	13/16" - 16	08	08	10	3/8"	06	36.5	11	24	19
OF1-0808K	13/16" - 16	08	08	12	1/2"	08	35	11	24	19
OF1-1008K	1" - 14	10	10	12	1/2"	08	39	13.5	30	24
OF1-1010K	1" - 14	10	10	16	5/8"	10	39.1	13.5	30	24
OF1-1012J	1" - 14	10	10	19	3/4"	12	42	13	30	27
OF1-1208K	1.3/16" - 12	12	12	12	1/2"	08	44.13	14.5	36	30
OF1-1210K	1.3/16" - 12	12	12	16	5/8"	08	44.13	14.5	36	30
OF1-1210J	1.3/16" - 12	12	12	16	5/8"	10	44.13	14.5	36	30
OF1-1216J	1.3/16" - 12	12	12	25	1"	16	51	14.5	36	36
OF1-1010J	1" - 14	10	10	16	5/8"	10	41	13.5	30	24
OF1-1212J	1.3/16" - 12	12	12	20	3/4"	12	46	14.5	36	30
OF1-1612J	1.7/16" - 12	16	16	20	3/4"	12	53	14.8	41	36
OF1-1616J	1.7/16" - 12	16	16	25	1"	16	54.1	14.8	41	36
OF1-2016J	1.11/16" - 12	20	20	25	1"	16	56.1	14.8	50	41
OF1-2020J	1.11/16" - 12	20	20	32	1.1/4"	20	55.9	14.8	50	41
OF1-2420J	2" - 12	24	24	32	1.1/4"	20	63.1	14.8	60	50
OF1-2424J	2" - 12	24	24	25	1.1/2"	24	61.2	14.8	60	50

* For data pertaining to these fittings when equipped with metric threads, as commonly encountered on equipment of Chinese origin, please refer to Product Code **MOF1** on page C 27 of this catalogue

OM1

O-RING FACE SEAL MALE STRAIGHT

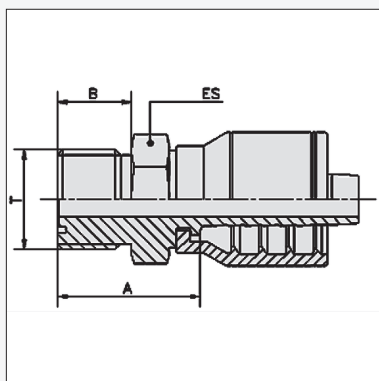

Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	ES	
OM1-0404K	9/16" - 18	04	04	6	1/4"	04	24.3	9.8	15	
OM1-0606K	11/16" - 16	06	06	10	3/8"	06	26.7	11.2	19	
OM1-0806K	13/16" - 16	08	08	10	3/8"	06	29	12.8	22	
OM1-0808K	13/16" - 16	08	08	12	1/2"	08	29.6	12.8	22	
OM1-1008K	1" - 14	10	10	12	1/2"	08	34.1	15.5	27	
OM1-1010K	1" - 14	10	10	16	5/8"	10	31.4	15.5	27	
OM1-1210K	1.3/16" - 12	12	12	16	5/8"	10	37.1	17	32	
OM1-1212J	1.3/16" - 12	12	12	20	3/4"	12	39.1	17	32	
OM1-1612J	1.7/16" - 12	16	16	19	3/4"	12	40.8	17.5	41	
OM1-1616J	1.7/16" - 12	16	16	25	1"	16	41.9	17.5	41	
OM1-2016J	1.11/16" - 12	20	20	25	1"	16	72	17.5	46	
OM1-2020J	1.11/16" - 12	20	20	32	1.1/4"	20	45.4	17.5	46	



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice


ORFS FITTINGS

ORIGIN: NORTH AMERICA



OF3


O-RING FACE SEAL FEMALE 30° ELBOW

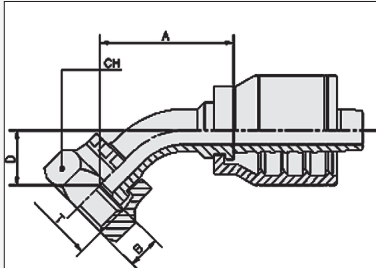

Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
OF3-1212J	1.3/16" - 12	12	12	20	3/4"	12		14.5		36

OF4

O-RING FACE SEAL FEMALE 45° ELBOW

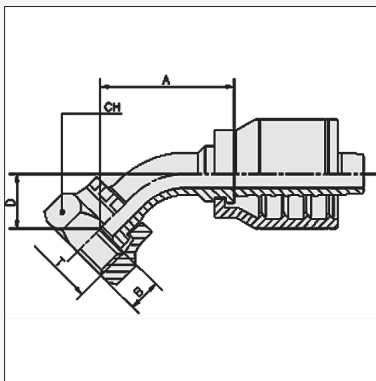

Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
OF4-0404K	9/16" - 18	04	04	6	1/4"	04	43.5	8	11	17
OF4-0604K	11/16" - 16	06	06	6	1/4"	04	36	9.5	15	22
OF4-0606K	11/16" - 16	06	06	10	3/8"	06	47.5	9.5	15	22
OF4-0608K	11/16" - 16	06	06	12	1/2"	08	49	9.5	15.8	22
OF4-0806K	13/16" - 16	08	08	10	3/8"	06	43.5	11	15	24
OF4-0808K	13/16" - 16	08	08	12	1/2"	08	56.5	11	14	24
OF4-0808J	13/16" - 16	08	08	12	1/2"	08	43	11	14	24
OF4-1208K	1.3/16" - 12	12	12	12	1/2"	08	54.5	14.5	20	36
OF4-1010K	1" - 14	10	10	16	5/8"	10	56.5	13.5	21	30
OF4-1212J	1.3/16" - 12	12	12	20	3/4"	12	65.4	14.5	23.2	36
OF4-1616J	1.7/16" - 12	16	16	25	1"	16	84	14.8	31	41
OF4-2020J	1.11/16" - 12	20	20	32	1.1/4"	20	95.4	14.8	36.3	50
OF4-2424J	2" - 12	24	24	38	1.1/2"	24	124.6	14.8	47.2	60

ORFS FITTINGS


ORIGIN: NORTH AMERICA



K, J, 2J SERIES

OF9

O-RING FACE SEAL FEMALE 90° ELBOW

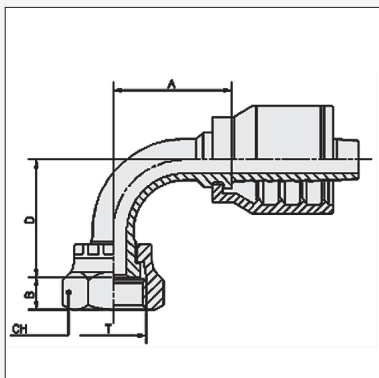


Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
OF9-0404K	9/16" - 18	04	04	6	1/4"	04	29	8	22.5	17
OF9-0604K	11/16" - 16	06	06	6	1/4"	04	27	9.5	25	22
OF9-0606K	11/16" - 16	06	06	10	3/8"	06	32.5	9.5	28	22
OF9-0806K	13/16" - 16	08	08	10	3/8"	06	33	11	30	24
OF9-0808K	13/16" - 16	08	08	12	1/2"	08	40.5	11	32	24
OF9-1008K	1" - 14	10	10	12	1/2"	08	44	13.5	34	30
OF9-1010K	1" - 14	10	10	16	5/8"	10	56	13.5	44	30
OF9-1208K	1.3/16" - 12	12	12	12	1/2"	08	56.5	14.5	39	36
OF9-1210K	1.3/16" - 12	12	12	16	5/8"	10	56.5	14.5	48	36
OF9-0606J	11/16" - 16	06	06	10	3/8"	06	31.5	9.5	25	22
OF9-0808J	13/16" - 16	08	08	12	1/2"	08	43.3	11	30	24
OF9-1010J	1" - 14	10	10	16	5/8"	10	55	12	44	30
OF9-1212J	1.3/16" - 12	12	12	20	3/4"	12	61	14.5	48	36
OF9-1216J	1.3/16" - 12	12	12	25	1"	16	63	14.5	48.5	36
OF9-1612J	1.7/16" - 12	16	16	20	3/4"	12	61	14.8	50	41
OF9-1616J	1.7/16" - 12	16	16	25	1"	16	73	14.8	59	41
OF9-1616J-071	1.7/16" - 12	16	16	25	1"	16	74	13.7	71	41
OF9-2016J	1.11/16" - 12	20	20	25	1"	16	73	14.8	77	50
OF9-2020J	1.11/16" - 12	20	20	32	1.1/4"	20	84.4	14.8	77	50
OF9-2424J	2" - 12	24	24	38	1.1/2"	24	102	14.8	94	60

ORFS FITTINGS

OFL9

O-RING FACE SEAL FEMALE 90° LONG DROP ELBOW

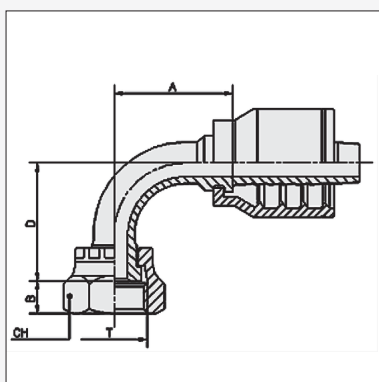

Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
OFL9-0404K	9/16" - 18	04	04	6	1/4"	04	29	8	46	17
OFL9-0606K	11/16" - 16	06	06	10	3/8"	06	32.5	9.5	54	22
OFL9-0808K	13/16" - 16	08	08	12	1/2"	08	41.5	11	64	24
OFL9-1008K	1" - 14	10	10	12	1/2"	08	55	13.5	70	30
OFL9-1010K	1" - 14	10	10	16	5/8"	10	55	13.5	70	30
OF9-1010J-100	1" - 14	10	10	16	5/8"	10	55	12	100	30
OFL9-1212J	1.3/16" - 12	12	12	20	3/4"	12	61	14.5	96	36
OFL9-1612J	1.7/16" - 12	16	16	20	3/4"	12	61	14.8	114	41
OFL9-1616J	1.7/16" - 12	16	16	25	1"	16	73	14.8	114	41
OFL9-2020J	1.11/16" - 12	20	20	32	1.1/4"	20	86.5	14.8	129	50



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

21
C


METRIC FITTINGS

ORIGIN: GERMANY



DMSF1

METRIC MULTISEAL FEMALE 24°/60° STRAIGHT




Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	
DMSF1-1404K	M14 x 1.5	14	8 L	6	1/4"	04	20.5	3.5	17	
DMSF1-1604K	M16 x 1.5	16	10 L	6	1/4"	04	20	5	19	
DMSF1-1606K	M16 x 1.5	16	10 L	10	3/8"	06	20	5	19	
DMSF1-1806K	M18 x 1.5	18	12 L	10	3/8"	06	21	5	22	
DMSF1-2208K	M22 x 1.5	22	15 L	12	1/2"	08	23.5	5	27	

These fittings are commonly found on European pressure cleaners and on forklifts / small mobile equipment of Chinese origin

DMSF9


METRIC MULTISEAL 24°/60 FEMALE 90°

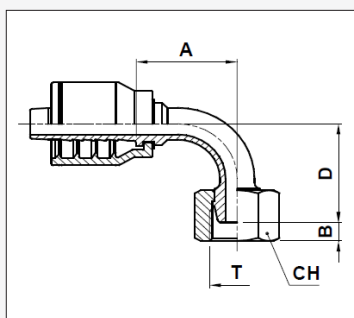

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	T	Size	Tube	DN	INCH	SIZE	A	B	D	CH
DMSF9-1404K	M14X1.5	14	8 L	6	1/4"	04	28.5	3.5	30.0	17
DMSF9-1604K	M16X1.5	16	10 L	6	1/4"	04	29.5	5.0	30.0	19
DMSF9-1606K	M16X1.5	16	10 L	10	3/8"	06	35.5	5.0	33.5	22
DMSF9-1806K	M18X1.5	18	12 L	10	3/8"	06	32.0	5.0	35.5	22

DLM1

DKL (LIGHT) METRIC 24°
MALE STRAIGHT

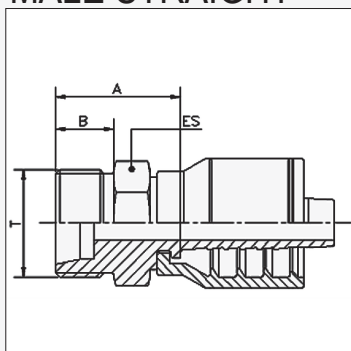

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	ES	
DLM1-1204K	M12 x 1.5	12	6 L	6	1/4"	04	22.5	10	14	
DLM1-1404K	M14 x 1.5	14	8 L	6	1/4"	04	22.5	10	14	
DLM1-1604K	M16 x 1.5	16	10 L	06	1/4"	04	24.5	11	17	
DLM1-1605K	M16 x 1.5	16	10 L	08	5/16"	05	24.5	11	17	
DLM1-1606K	M16 x 1.5	16	10 L	10	3/8"	06	24.5	11	17	
DLM1-1804K	M18 x 1.5	18	12 L	06	1/4"	04	25	11	19	
DLM1-1806K	M18 x 1.5	18	12 L	10	3/8"	06	25	11	19	
DLM1-2208K	M22 x 1.5	22	15 L	12	1/2"	08	26.5	12	22	
DLM1-2610K	M26 x 1.5	26	18 L	16	5/8"	10	29	12	27	
DLM1-3012J	M30 x 2	30	22 L	20	3/4"	12	35	14	30	
DLM1-3612J	M36 x 2	36	28 L	25	3/4"	12	31	14	36	
DLM1-3616J	M36 x 2	36	28 L	25	1"	16	35.1	14	36	
DLM1-5224J	M52X2	52	42L	48	1.1/2"	24	44	16	55	

METRIC FITTINGS

ORIGIN: GERMANY




K, J, 2J SERIES

METRIC FITTINGS

DLF1


DKL (LIGHT) METRIC 24° FEMALE STRAIGHT



Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	
DLF1-1204K	M12 x 1.5	12	6 L	6	1/4"	04	20.9	2.6	16	
DLF1-1404K	M14 x 1.5	14	8 L	6	1/4"	04	25	1.5	17	
DLF1-1604K	M16 x 1.5	16	10L	6	1/4"	04	26.5	1.5	19	
DLF1-1605K	M16 x 1.5	16	10 L	08	5/16"	05	26.5	1.5	19	
DLF1-1606K	M16 x 1.5	16	10 L	10	3/8"	06	27.5	1.5	22	
DLF1-1804K	M18 x 1.5	18	12 L	6	1/4"	04	26	1.5	22	
DLF1-1806K	M18 x 1.5	18	12 L	10	3/8"	06	26	1.5	22	
DLF1-2206K	M22 x 1.5	22	15 L	10	3/8"	06	27.5	2.5	27	
DLF1-2208K	M22 x 1.5	22	15 L	12	1/2"	08	28.5	2.5	27	
DLF1-2610K	M26 x 1.5	26	18 L	16	5/8"	10	29	2	32	
DLF1-2612J	M26x1,5	26	L18	19	3/4"	12	25,5	2	32	
DLF1-3012J	M30 x 2	30	22 L	20	3/4"	12	31	3.5	36	
DLF1-3616J	M36 x 2	36	28 L	25	1"	16	32.1	3.5	41	
DLF1-4520J	M45 x 2	45	35 L	32	1.1/4"	20	41.4	2	50	
DLF1-5224J	M52 x 2	52	42 L	38	1.1/2"	24	39.5	3	60	

DLF4


DKL (LIGHT) METRIC 24° FEMALE
45° ELBOW

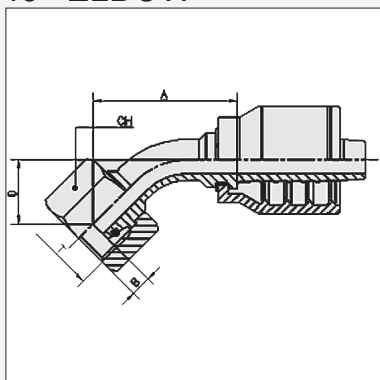

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
DLF4-1204K	M12 x 1.5	12	6 L	6	1/4"	04	38.5	2.6	18	16
DLF4-1404K	M14 x 1.5	14	8 L	6	1/4"	04	39.7	1.5	20	17
DLF4-1605K	M16 x 1.5	16	10L	8	5/16"	05	41.5	1.5	19	19
DLF4-1606K	M16 x 1.5	16	10 L	10	3/8"	06	50.5	1.5	19	22
DLF4-1806K	M18 x 1.5	18	12 L	10	3/8"	06	46.5	1.5	19	22
DLF4-2208K	M22 x 1.5	22	15 L	12	1/2"	08	52.5	2.5	23	27
DLF4-2610K	M26 x 1.5	26	18 L	16	5/8"	10	69.5	2	27.2	32
DLF4-2612J	M26x1,5	26	L18	19	3/4"	12	70	2	28.8	32
DLF4-3012J	M30 x 2	30	22 L	20	3/4"	12	76.7	3.5	32	36
DLF4-3616J	M36 x 2	36	28 L	25	1"	16	91.6	3.5	35.5	41

DLF9

DKL (LIGHT) METRIC 24° FEMALE
90° ELBOW

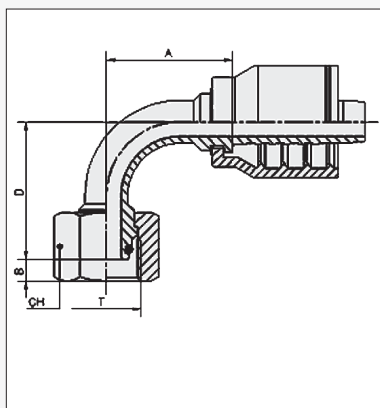

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
DLF9-1204K	M12 x 1.5	12	6 L	06	1/4"	04	27.5	2.36	37	16
DLF9-1404K	M14 x 1.5	14	8 L	06	1/4"	04	29.5	1.5	37.6	17
DLF9-1605K	M16 x 1.5	16	10L	08	5/16"	05	31.5	1.5	35.5	19
DLF9-1606K	M16 x 1.5	16	10 L	10	3/8"	06	65	1.5	37	22
DLF9-1804K	M18 x 1.5	18	12 L	06	1/4"	04		1.5		22
DLF9-1806K	M18 x 1.5	18	12 L	10	3/8"	06	32	1.5	39	22
DLF9-2208K	M22 x 1.5	22	15 L	12	1/2"	08	39	2.5	45	27
DLF9-2610K	M26 x 1.5	26	18 L	16	5/8"	10	57.5	2	56	32
DLF9-2612J	M26x1,5	26	L18	19	3/4"	12	55.5	2	57.7	32
DLF9-3012J	M30 x 2	30	22 L	19	3/4"	12	72.7	3.5	67.5	36
DLF9-3616J	M36 x 2	36	28 L	25	1"	16	79.6	3.5	75	41
DLF9-4520J	M45 x 2	45	35 L	32	1.1/4"	20	104.5	2	89.5	50
DLF9-5224J	M52 x 2	52	42 L	38	1.1/2"	24	116.3	3	103.5	60



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice


23
C

METRIC FITTINGS

ORIGIN: GERMANY




DSM1

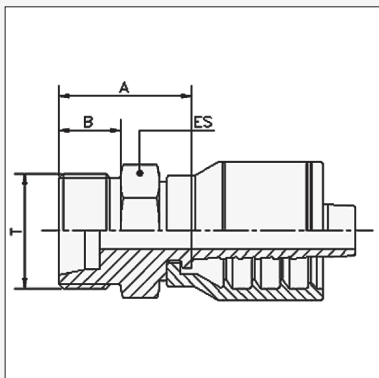DKS (HEAVY) METRIC 24° MALE
STRAIGHT

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	ES	
DSM1-1604K	M16 x 1.5	16	8 S	6	1/4"	04	26	12	17	
DSM1-1804K	M18 x 1.5	18	10 S	6	1/4"	04	26	12	19	
DSM1-2006K	M20 x 1.5	20	12 S	10	3/8"	06	26	12	22	
DSM1-2206K	M22 x 1.5	22	14 S	10	3/8"	06	28	14	22	
DSM1-2408K	M24 x 1.5	24	16 S	12	1/2"	08	28.5	14	24	
DSM1-3010K	M30 x 2	30	20 S	16	5/8"	10	33	16	30	
DSM1-3612J	M36 x 2	36	25 S	20	3/4"	12	38	18	36	
DSM1-4216J	M42 x 2	42	30 S	25	1"	16	40.1	20	46	
DSM1-5220J	M52 x 2	52	38 S	32	1.1/4"	20	49.9	22	55	

DSF1

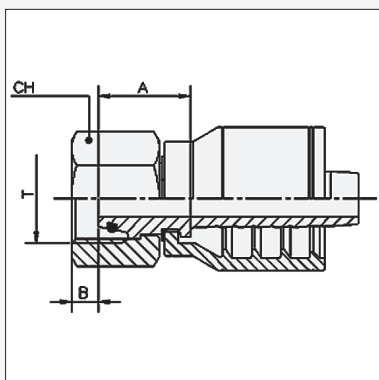DKS (HEAVY) METRIC 24° FEMALE
STRAIGHT

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	
DSF1-1404K	M14 x 1.5	14	6 S	6	1/4"	04	22	2.5	17	
DSF1-1604K	M16 x 1.5	16	8 S	6	1/4"	04	26.5	2.5	19	
DSF1-1804K	M18 x 1.5	18	10 S	6	1/4"	04	28	2	22	
DSF1-2005K	M20 x 1.5	20	12 S	8	5/16"	05	27	2	24	
DSF1-2006K	M20 x 1.5	20	12 S	10	3/8"	06	25.5	2	24	
DSF1-2206K	M22 x 1.5	22	14 S	10	3/8"	06	28.5	4	27	
DSF1-2408K	M24 x 1.5	24	16 S	12	1/2"	08	32	3	30	
DSF1-3010K	M30 x 2	30	20 S	16	5/8"	10	34	3.5	36	
DSF1-3012J	M30 x 2	30	20 S	20	3/4"	12	34	3.5	36	
DSF1-3612J	M36 x 2	36	25 S	20	3/4"	12	41	3	46	
DSF1-3616J	M36 x 2	36	25 S	25	1"	16	42.1	3	46	
DSF1-4216J	M42 x 2	42	30 S	25	1"	16	44.6	6	50	
DSF1-5220J	M52 x 2	52	38 S	32	1.1/4"	20	48.9	6.5	60	

METRIC FITTINGS

ORIGIN: GERMANY




K, J, 2J SERIES

METRIC FITTINGS

DSF4


DKS (HEAVY) METRIC 24° FEMALE
45° ELBOW

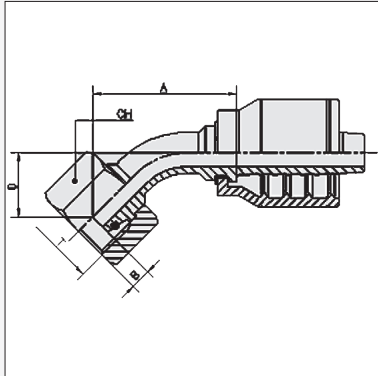

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
DSF4-1404K	M14 x 1.5	14	6 S	6	1/4"	04	40.5	2.5	20	17
DSF4-1604K	M16 x 1.5	16	8 S	6	1/4"	04	40.5	2.5	16.5	19
DSF4-1804K	M18 x 1.5	18	10 S	6	1/4"	04	42.5	2	17	22
DSF4-1806K	M18 x 1.5	18	10S	10	3/8"	6	42.2	2	19.2	22
DSF4-2006K	M20 x 1.5	20	12 S	10	3/8"	06	46	2	21.5	24
DSF4-2206K	M22 x 1.5	22	14 S	10	3/8"	06	49.5	4	23.4	27
DSF4-2408K	M24 x 1.5	24	16 S	12	1/2"	08	61	3	26	30
DSF4-3010K	M30 x 2	30	20 S	16	5/8"	10	59	3.5	26	36
DSF4-3008K	M30 x 2	30	20 S	08	1/2"	08				
DSF4-3012J	M30 x 2	30	20 S	20	3/4"	12	59	3.5	26	36
DSF4-3612J	M36 x 2	36	25 S	20	3/4"	12	81.5	3	34.5	46
DSF4-4216J	M42 x 2	42	30 S	25	1"	16	91.5	6	35	50


DSF9

DKS (HEAVY) METRIC 24° FEMALE
90° ELBOW

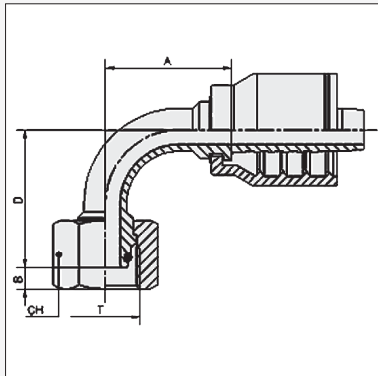

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
DSF9-1404K	M14 x 1.5	14	6 S	6	1/4"	04	27.5	2.5	37.5	17
DSF9-1604K	M16 x 1.5	16	8 S	6	1/4"	04	28.5	2.5	32	19
DSF9-1804K	M18 x 1.5	18	10 S	6	1/4"	04	33	2	33.5	22
DSF9-2006K	M20 x 1.5	20	12 S	10	3/8"	06	37	2	36	24
DSF9-2206K	M22 x 1.5	22	14 S	10	3/8"	06	38.5	4	46	27
DSF9-2408K	M24 x 1.5	24	16 S	12	1/2"	08	43.5	3	46	30
DSF9-3010K	M30 x 2	30	20 S	16	5/8"	10	52	3.5	53.5	36
DSF9-3012J	M30 x 2	30	20 S	20	3/4"	12	52	3.5	53.5	36
DSF9-3612J	M36 x 2	36	25 S	20	3/4"	12	73.7	3	72.5	46
DSF9-4216J	M42 x 2	42	30 S	25	1"	16	83	6	77	50
DSF9-5220J	M52 x 2	52	38 S	32	1.1/4"	20	95.6	6.5	104	60

O-RING DATA

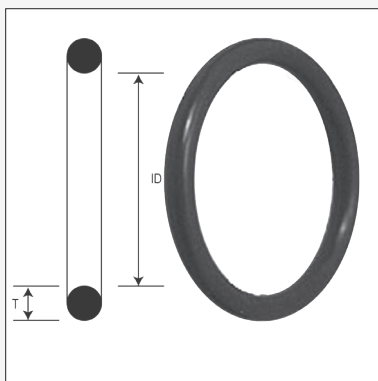

O-RING DETAILS FOR LIGHT & HEAVY METRIC HOSE TAILS - 70 DURO NBR					
PRODUCT CODE	METRIC SERIES	METRIC THREAD SIZE		TUBE O.D. (MM)	DIMENSIONS (MM) I.D. X THICKNESS (T)
		LIGHT SERIES	HEAVY SERIES		
DKOR 06-L/S	DKL / DKS	M12X1.5	M14X1.5	6	4 X 1.5
DKOR 08-L/S	DKL / DKS	M14X1.5	M16X1.5	8	6 X 1.5
DKOR 10-L/S	DKL / DKS	M16X1.5	M18X1.5	10	7.5 X 1.5
DKOR 12-L/S	DKL / DKS	M18X1.5	M20X1.5	12	9 X 1.5
DKOR 14-S	DKS	-	M22X1.5	14	10 X 2
DKOR 15-L	DKL	M22X1.5	-	15	12 X 2
DKOR 16-S	DKS	-	M24X1.5	16	12 X 2
DKOR 18-L	DKL	M26X1.5	-	18	15 X 2
DKOR 20-S	DKS	-	M30X2	20	16.3 X 2.4
DKOR 22-L	DKL	M30X2	-	22	20 X 2
DKOR 25-S	DKS	-	M36X2	25	20.3 X 2.4
DKOR 28-L	DKL	M36X2	-	28	26 X 2
DKOR 30-S	DKS	-	M42X2	30	25.3 X 2.4
DKOR 35-L	DKL	M45X2	-	35	32 X 2.5
DKOR 38-S	DKS	-	M52X2	38	33.3 X 2.4
DKOR 42-L	DKL	M52X2	-	42	38 X 2.5




This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

METRIC FITTINGS

ORIGIN: GERMANY




SPM1

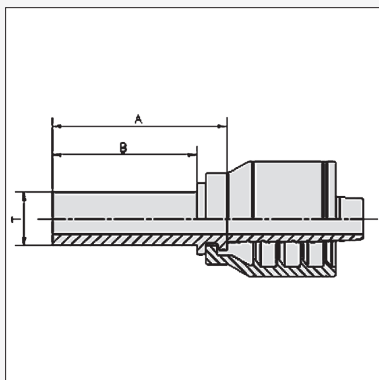METRIC STANDPIPE
STRAIGHT


Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	T	A	B	
SPM1-0604K †	06	06	6 L/S	06	1/4"	04	6	28	22	
SPM1-0804K †	08	08	8 L/S	06	1/4"	04	8	30.5	24	
SPM1-1004K †	10	10	10 L/S	06	1/4"	04	10	33	27	
SPM1-1005K †	10	10	10 L/S	08	5/16"	05	10	30.5	24	
SPM1-1006K †	10	10	10 L/S	10	3/8"	06	10	30.5	24	
SPM1-1206K †	12	12	12 L/S	10	3/8"	06	12	30.5	24	
SPM1-1508K †	15	15	15 L	12	1/2"	08	15	33	26	
SPM1-1608K †	16	16	16 S	12	1/2"	08	16	37	30	
SPM1-1810K †	18	18	18 L	16	5/8"	10	18	34	27	
SPM1-2010K †	20	20	20 S	16	5/8"	10	20	44	37	
SPM1-2212J †	22	22	22 L	20	3/4"	12	22	36.5	29	
SPM1-2512J †	25	25	25 S	20	3/4"	12	25	48.5	41	
SPM1-2816J †	28	28	28 L	25	1"	16	28	39.5	30	
SPM1-3016J †	30	30	30 S	25	1"	16	30	53.5	44	

SPM4

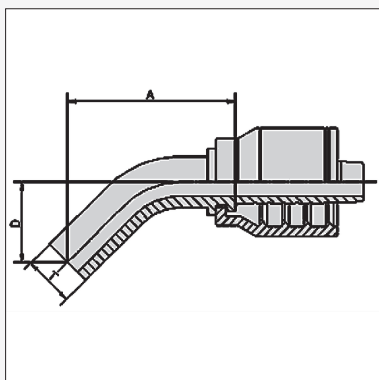METRIC STANDPIPE
45° ELBOW

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	T	A	D	
SPM4-0604K †	06	06	6 L/S	6	1/4"	04	6	45	22	
SPM4-0804K †	08	08	8 L/S	6	1/4"	04	8	50.5	23	
SPM4-1004K †	10	10	10 L/S	6	1/4"	04	10	57.5	24.5	
SPM4-1006K †	10	10	10 L/S	10	3/8"	06	10	45.5	22	
SPM4-1206K †	12	12	12 L/S	10	3/8"	06	12	56	29	
SPM4-1508K †	15	15	15 L	12	1/2"	08	15	60.5	28	
SPM4-1608K †	16	16	16 S	12	1/2"	08	16	53	34	
SPM4-1810K †	18	18	18 L	16	5/8"	10	18	86	39	
SPM4-2010K †	20	20	20 S	16	5/8"	10	20	86	46	

SPM9

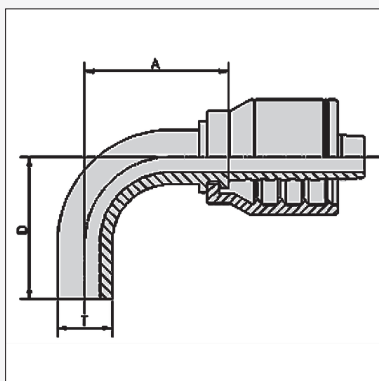METRIC STANDPIPE
90° ELBOW

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	T	A	D	
SPM9-0604K †	06	06	6 L/S	6	1/4"	04	6	25	34	
SPM9-0804K †	08	08	8 L/S	6	1/4"	04	8	27.5	36	
SPM9-1004K †	10	10	10 L/S	6	1/4"	04	10	27.5	36	
SPM9-1005K †	10	10	10 L/S	8	5/16"	05	10	36	39	
SPM9-1006K †	10	10	10 L/S	10	3/8"	06	10	36	39	
SPM9-1206K †	12	12	12 L/S	10	3/8"	06	12	33.5	47	
SPM9-1508K †	15	15	15 L	12	1/2"	08	15	43.5	54	
SPM9-1608K †	16	16	16 S	12	1/2"	08	16	42.5	53.5	
SPM9-1810K †	18	18	18 L	16	5/8"	10	18	58.5	63	
SPM9-2010K †	20	20	20 S	16	5/8"	10	20	59.5	68	

This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

METRIC FITTINGS

ORIGIN: GERMANY




K, J, 2J SERIES

METRIC BANJOS & O-RING FACE SEAL

BM1


METRIC BANJO STRAIGHT

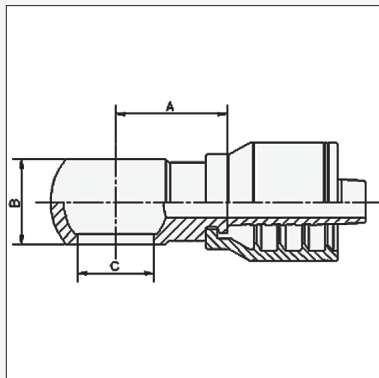

Product Code	Metric Thread			Nominal ID			Dimensions mm		
	T	Size		Dash	Inch	DN	A	B	C
BM1-1204K	M12 x 1.5	12	12	6	1/4"	04	21	12	12
BM1-1405K	M14 x 1.5	14	14	8	5/16"	05	22.5	14	14
BM1-1406K	M14 x 1.5	14	14	10	3/8"	06	24	14	14
BM1-1606K	M16 x 1.5	16	16	10	3/8"	06	24	18	16
BM1-1806K	M18 x 1.5	18	18	10	3/8"	06	27.5	20	18
BM1-1808K	M18 x 1.5	18	18	12	1/2"	08	28.1	20	18
BM1-2210K	M22 x 1.5	22	22	16	5/8"	10	28	22	22
BM1-2612J	M 26 x 1.5	26	26	20	3/4"	12	38	29	26
BM1-3016J	M30 x 2	30	30	25	1"	16	46.1	37	30

BMB

METRIC BANJO BOLT

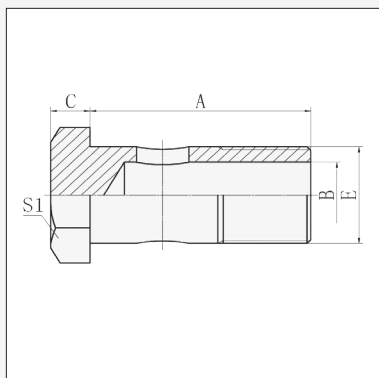


Product Code	Bolt Thread		To Suit Hose Bore			Dimension (mm)				
	E	Size	DN	Inch	Size	A	B	C	S1	E
BMB-10	M10 x 1	10	05	3/16"	03					
BMB-12	M12 x 1.5	12	06	1/4"	04	24	6	6	17	12
BMB-14	M14 x 1.5	14	10	3/8"	06	26	8	7	19	14
BMB-16	M16 x 1.5	16	10	3/8"	06	28	9	7.5	22	16
BMB-18	M18 x 1.5	18	10, 12	3/8", 1/2"	06, 08	32	11	8	24	18
BMB-22	M22 x 1.5	22	16	5/8"	10	39	14	9	27	22
BMB-26	M26 x 1.5	26	20	3/4"	12	45	18	10	32	26

MOF1

METRIC O-RING FACE SEAL FEMALE STRAIGHT

SUITS CHINESE EQUIPMENT

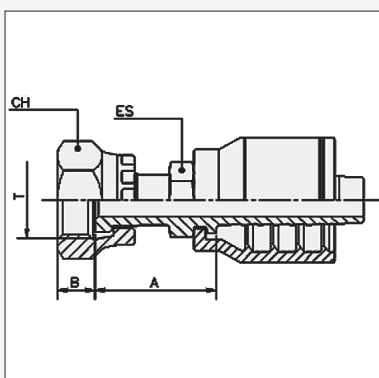

Product Code	Metric Thread		Hose Bore			Dimensions (mm)			
	Thread	Size	DN	Inch	Size	A	B	CH	ES
MOF1-1604K	M16 x 1.5	04	6	1/4"	04	na	na	19	-
MOF1-1804K	M18 x 1.5	04	6	1/4"	04	23	8.2	22	-
MOF1-1606K	M16 x 1.5	06	10	3/8"	06	18	8.2	19	-
MOF1-1806K	M18 x 1.5	06	10	3/8"	06	25	8.2	22	-
MOF1-2206K	M22 x 1.5	06	10	3/8"	06	27	10.4	27	-
MOF1-2408K	M24 x 1.5	08	12	1/2"	08	26	10.8	30	-

Pirtek do not offer male hose tails or adaptors to suit these fittings. The male fittings, when encountered in the field, differ in the manner of O-Ring retention from conventional American ORFS fittings. They feature a recessed circular flat area to retain the O-Ring rather than the more common groove as used in American fittings.




This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

27
C

SAE FLANGES

ORIGIN: NORTH AMERICA

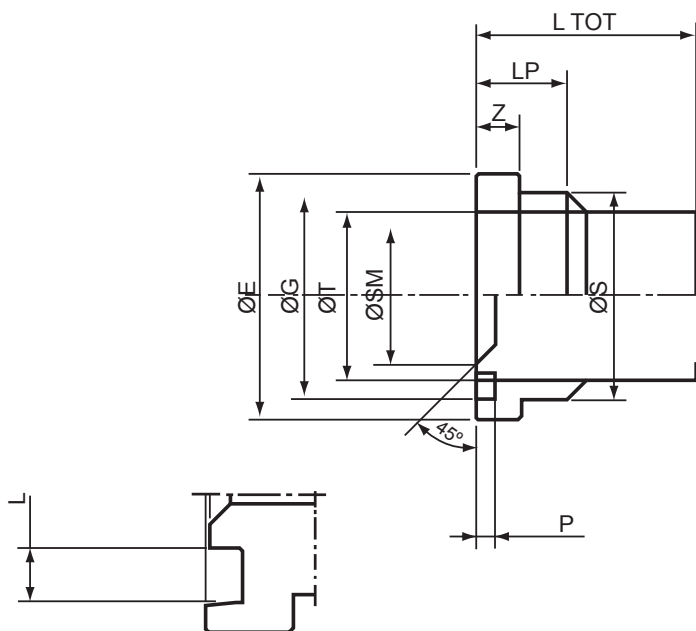

Nominal Groove and Flange Dimensions for the Pirtek Range of

SAE Code 61, Code 62 and "Supercat" Flanges

Note that manufacturing tolerances may apply. Refer SAE J518 for comprehensive details.

Further technical details of O-Rings and Flange Clamps can be found in Section D (Adaptors) of this Catalogue

Note that the dimensions of "Supercat" Flanges are identical to those of Code 62 Flanges in all respects except Dimension Z.

The "Supercat" Flanges all have 14.2 mm as the Z Dimension

Associated bolt dimensions are tabulated opposite

SIZE	O-Ring Product Code	Clamp Product Code	CODE 61 DIMENSIONS							
			ØE	ØG	ØS	Z	LP	L	P	LTOT
08	Y-08	AZ3-08	30.18	25.46	24	6.73	13	4.2	2.86	Sufficient to allow bolt installation
12	Y-12	AZ3-12	38.10	31.80	32	6.73	14	4.2	2.86	
16	Y-16	AZ3-16	44.45	39.68	38	8.00	14	4.2	2.86	
20	Y-20	AZ3-20	50.80	44.51	43	8.00	14	4.2	2.86	
24	Y-24	AZ3-24	60.33	53.85	50	8.00	16	4.2	2.86	
32	Y-32	AZ3-32	71.42	63.37	62	9.53	16	4.2	2.86	
40	Y-40	AZ3-40	84.12	76.20	74	9.53	18	4.2	2.86	
48	Y-48	AZ3-48	101.60	91.92	90	9.53	19	4.2	2.86	

SIZE	O-Ring * Product Code	Clamp Product Code	CODE 62 DIMENSIONS							
			ØE	ØG	ØS	Z	LP	L	P	LTOT
08	Y-08	AZ6-08	31.75	25.46	24	7.75	14	4.2	2.86	Sufficient to allow bolt installation
12	Y-12	AZ6-12	41.28	31.80	32	8.76	18	4.2	2.86	
16	Y-16	AZ6-16	47.63	39.68	38	9.53	21	4.2	2.86	
20	Y-20	AZ6-20	53.98	44.51	44	10.29	25	4.2	2.86	
24	Y-24	AZ6-24	63.50	53.85	51	12.57	30	4.2	2.86	
32	Y-32	AZ6-32	79.38	63.37	67	12.57	38	4.2	2.86	

* OKS Series O-Rings provide superior performance to the Y Series O-Rings for more demanding applications often associated with Code 62 Flanges
See Catalogue Section D page D 84

SIZE	O-Ring Product Code	Clamp Product Code	STANDARD PRESSURE KOMATSU FLANGES DIMENSIONS							
			ØE	ØG	ØS	Z	LP	L	P	LTOT
10	Y-10	-	34.1					4.75	2.70	
12	KY-12	AZ3-12	38.0	31.07	31.80	6.70	14	4.75	2.70	65
16	KY-16	AZ3-16	44.5	38.07	38.00	8.00	14	4.75	2.70	65
20	KY-20	AZ3-20	50.8	44.07	43.00	8.00	14	4.75	2.70	71
24	KY-24	AZ3-24	60.3	54.10	50.20	8.00	16	4.75	2.70	83
32	KY-32	AZ3-32	71.4	65.10	62.00	9.50	22+	4.25	2.40	113

SAE FLANGES

ORIGIN: NORTH AMERICA




K, J, 2J SERIES

SAE FLANGE DATA

AZ3

SAE CODE 61

SPLIT FLANGE CLAMPS

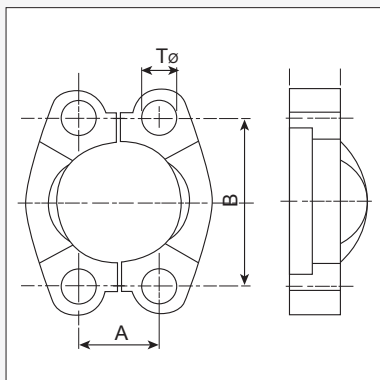

Product Code	Clamp			Dimensions (mm)			Associated Bolt Details			
							UNC Bolts		Metric Bolts	
	DN	Inch	Size	Tø	A	B	Thread	Length	Thread	Length
AZ3-08	12	08	1/2"	9	17.48	38.10	5/16"-18	1 1/4"	M8 x 1.25	25
AZ3-10 *	20	12	5/8"	11	22.26	47.63	5/16"-18	1 1/4"	M8 x 1.25	35
AZ3-12	20	12	3/4"	11	22.26	47.63	3/8"-16	1 1/4"	M10 x 1.5	30
AZ3-16	25	16	1"	11	26.16	52.37	3/8"-16	1 1/4"	M10 x 1.5	30
AZ3-20	32	20	1.1/4"	11	30.18	58.72	7/16"-14	1 1/2"	M10 x 1.5	30
AZ3-24	38	24	1.1/2"	13.5	35.72	69.85	1/2"-13	1 1/2"	M12 x 1.75	35
AZ3-32	50	32	2"	13.5	42.88	77.77	1/2"-13	1 1/2"	M12 x 1.75	35
AZ3-40	62	40	2.1/2"	13.5	50.80	88.90	1/2"-13	1 3/4"	M12 x 1.75	40
AZ3-48	75	48	3"	17.5	61.92	106.38	5/8"-11	1 3/4"	M16 x 2	50
AZ3-56	90	56	3.1/2"	17	69.8	120.7	5/8"-11	1 3/4"	M16 x 2	50

* JIS size 10 is used only by Komatsu®


Komatsu® Flanges differ from Code 61 Flanges by their use of metric O-Rings instead of Imperial O-Rings, but are in all other respects identical.

Never use Imperial O-Rings (Y or OKS) in Komatsu® flanges - only KY series

AZ6

SAE CODE 62

SPLIT FLANGE CLAMPS

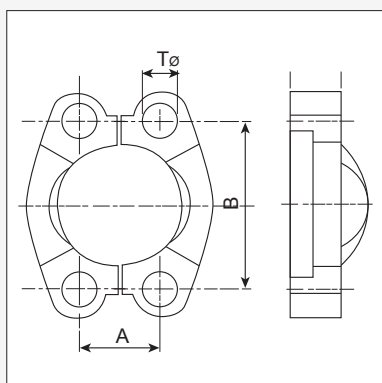

Product Code	Clamp			Dimensions (mm)			Associated Bolt Details					
							UNC Bolts			Metric Bolts		
	DN	Inch	Size	Tø	A	B	Thread	Length Code 62	Supercat	Thread	Length Code 62	Supercat
AZ6-08	12	08	1/2"	9	18.25	40.49	5/16"-18	1 1/4"	-	M8 x 1.25	30	-
AZ6-12	20	12	3/4"	11	23.82	50.80	3/8"-16	1 1/2"	1 3/4"	M10 x 1.5	35	45
AZ6-16	25	16	1"	13	27.78	57.15	7/16"-14	1 3/4"	1 3/4"	M12 x 1.75	45	45
AZ6-20	32	20	1.1/4"	15	31.76	66.68	1/2"-13	1 3/4"	2"	M12 x 1.75	45	50
AZ6-24	38	24	1.1/2"	17	36.52	79.38	5/8"-11	2 1/4"	2 1/2"	M16 x 2	55	60
AZ6-32	50	32	2"	21	44.46	96.82	3/4"-10	2 3/4"	-	M20 x 2.5	70	-

Supercat Flange Clamps (not available from Pirtek) use the same bolt spacings as Code 62 but the bolts are generally longer to accommodate the 14.2 mm flange thickness



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

29
C


SAE FLANGES

ORIGIN: NORTH AMERICA



C611 / C611L

3000 PSI CODE 61 STRAIGHT
STANDARD & LONG FLANGE

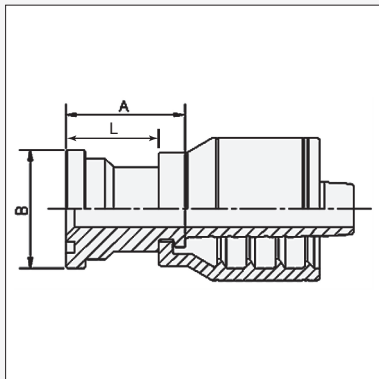


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB		
C611-0808K	1/2"	08	1.3/16"	12	1/2"	08	38	30.2		
C611-1010K †	5/8"	10	1.3/8"	16	5/8"	10	65	34.1		
C611-1208K	3/4"	12	1.1/2"	12	1/2"	08	39	38.1		
C611-1210K	3/4"	12	1.1/2"	16	5/8"	10	39	38		
C611-1212J	3/4"	12	1.1/2"	20	3/4"	12	41	38.1		
C611-1612J	1"	16	1.3/4"	20	3/4"	12	47.4	44.5		
C611-1616J	1"	16	1.3/4"	25	1"	16	48.5	44.5		
C611-1620J	1"	16	1.3/4"	32	1.1/4"	20	51.4	44.5		
C611-2012J	1.1/4"	20	2"	20	3/4"	12	47	50.8		
C611-2016J	1.1/4"	20	2"	25	1"	16	49.6	50.8		
C611-2020J	1.1/4"	20	2"	32	1.1/4"	20	51.4	50.8		
C611L-2020J-057	1.1/4"	20	2"	32	1.1/4"	20	66.9	50.8		
C611-2420J	1.1/2"	24	2.3/8"	32	1.1/4"	20	54.9	60.3		
C611-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	53	60.3		
C611-3224J	2"	32	2.13/16"	38	1.1/2"	24	74.5	71.4		
C611-2432J	1.1/2"	24	2.3/8"	50	2"	32	89	60.3		
C611-3232J	2"	32	2.13/16"	50	2"	32	76.2	71.4		
C611-4032J	2.1/2"	40	3.5/16"	50	2"	32	78.5	84.1		
C611-4040J	2.1/2"	40	3.5/16"	62	2.1/2"	40	90	84.1		
C611-4840J	3"	48	4"	62	2.1/2"	40	90	101.6		
C611-4848J	3"	48	4"	80	3"	48	60	101.6		

† Unique to Komatsu

C612 / C613

3000 PSI CODE 61
22° & 30° ELBOW FLANGE

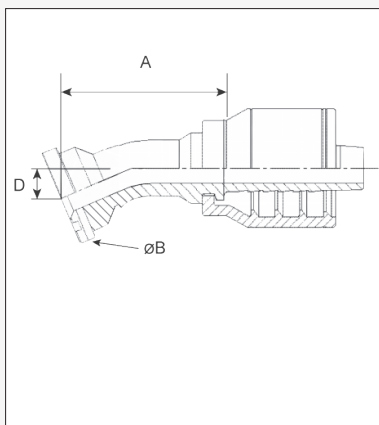

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	
22° ELBOW FLANGES										
C612-1212J	3/4"	12	1.1/2"	20	3/4"	12	68.7	38.1	11.8	
C612-1612J	1"	16	1.3/4"	20	3/4"	12	67.3	44.5	13	
C612-1616J	1"	16	1.3/4"	25	1"	16	73	44.5	11.5	
C612-2016J	1.1/4"	20	2"	25	1"	16	75.5	50.8	12.5	
C612-2020J	1.1/4"	20	2"	32	1.1/4"	20	81.5	50.8	13.5	
C612-2420J	1.1/2"	24	2.3/8"	32	1.1/4"	20	86	60.3	13.5	
C612-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	99	60.3	16	
C612-3224J	2"	32	2.13/16"	38	1.1/2"	24	99	71.4	15.5	
C612-3232J	2"	32	2.13/16"	50	2"	32	131	71.4	23	
C612-4040J	2.1/2"	40	3.5/16"	62	2.1/2"	40	105	84.1	18.6	
C612-4848J	3"	48	4"	76	3"	48	112,8	101,6	21,1	
30° ELBOW FLANGES										
C613-1212J	3/4"	12	1.1/2"	20	3/4"	12	69.2	38.1	16.6	
C613-1612J	1"	16	1.3/4"	20	3/4"	12	68.7	44.5	18	
C613-1616J	1"	16	1.3/4"	25	1"	16	78	44.5	16.5	
C613-2016J	1.1/4"	20	2"	25	1"	16	74	50.8	18	
C613-2020J	1.1/4"	20	2"	32	1.1/4"	20	84	50.8	19	
C613-2420J	1.1/2"	24	2.3/8"	32	1.1/4"	20	90	60.3	19	
C613-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	103	60.3	22.5	
C613-3224J	2"	32	2.13/16"	38	1.1/2"	24	103	71.4	22.5	
C613-3232J	2"	32	2.13/16"	50	2"	32	138	71.4	32	
C613-4040J	2.1/2"	40	3.5/16"	62	2.1/2"	40	114.4	84.1	27.7	
C613-4848J	3"	48	4"	80	3"	48	116.9	101.6	28.2	

This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

SAE FLANGES

ORIGIN: NORTH AMERICA




K, J, 2J SERIES

CODE 61 SAE FLANGE

C614

3000 PSI CODE 61
45° ELBOW FLANGE

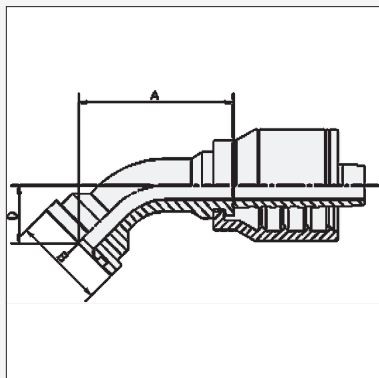


Product Code	Flange			Hose Bore			Dimensions (mm)		
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D
C614-0808K	1/2"	08	1.3/16"	12	1/2"	08	55.2	30	22.6
C614-1208K	3/4"	12	1.1/2"	12	1/2"	08	60.5	38.1	26
C614-1010K †	5/8"	10	1.3/8"	16	5/8"	10	66	34.1	26.7
C614-1212J	3/4"	12	1.1/2"	20	3/4"	12	70	38.1	26.7
C614-1612J	1"	16	1.3/4"	20	3/4"	12	73	44.5	28.8
C614-1616J	1"	16	1.3/4"	25	1"	16	75.5	44.5	27
C614-2016J	1.1/4"	20	2"	25	1"	16	77.3	50.8	29
C614-1620J	1"	16	1.3/4"	32	1.1/4"	20	115.5	44.5	43.5
C614-2020J	1.1/4"	20	2"	32	1.1/4"	20	89	50.8	31
C614-2420J	1.1/2"	24	2.3/8"	32	1.1/4"	20	91.8	60.3	31
C614-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	100	60.3	36.5
C614-3224J	2"	32	2.13/16"	38	1.1/2"	24	105	71.4	36.5
C614-3232J	2"	32	2.13/16"	50	2"	32	140	71.4	53
C614-4040J	2.1/2"	40	3.5/16"	62	2.1/2"	40		84.1	
C614-4840J	3"	48	4"	62	2.1/2"	40		101.6	
C611-4848J	3"	48	4"	80	3"	48		101.6	

† Unique to Komatsu

C616


3000 PSI CODE 61
60° ELBOW FLANGE

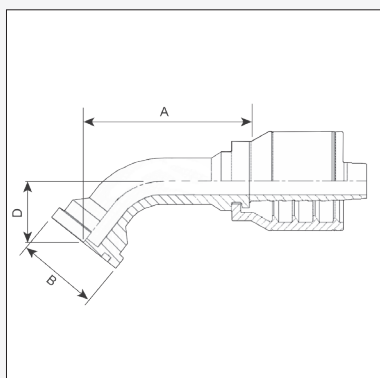

Product Code	Flange			Hose Bore			Dimensions (mm)		
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D
C616-1212J	3/4"	12	1.1/2"	20	3/4"	12	68.9	38.1	37.2
C616-1612J	1"	16	1.3/4"	20	3/4"	12	71.2	44.5	39.8
C616-1616J	1"	16	1.3/4"	25	1"	16	82	44.5	40
C616-2016J	1.1/4"	20	2"	25	1"	16	85	50.8	40
C616-2020J	1.1/4"	20	2"	32	1.1/4"	20	97.8	50.8	44
C616-2420J	1.1/2"	24	2.3/8"	32	1.1/4"	20	97.8	60.3	44
C616-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	114	60.3	52
C616-3224J	2"	32	2.13/16"	38	1.1/2"	24	112	71.4	55.5
C616-3232J	2"	32	2.13/16"	50	2"	32	155	71.4	76
C616-4040J	2.1/2"	40	3.5/16"	38	2.1/2"	40		84.1	
C616-4848J	3"	48	4"	80	3"	48		101.6	

C617

3000 PSI CODE 61
67° ELBOW FLANGE

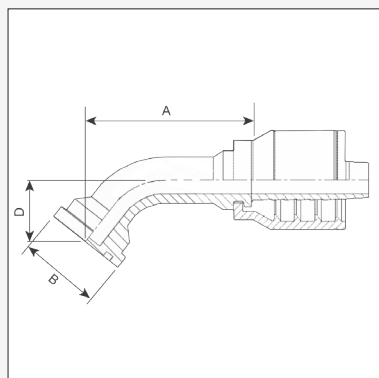

Product Code	Flange			Hose Bore			Dimensions (mm)		
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D
C617-1212J	3/4"	12	1.1/2"	20	3/4"	12	67.1	38.1	42.4
C617-1612J	1"	16	1.3/4"	20	3/4"	12	71.7	44.5	45.2
C617-1616J	1"	16	1.3/4"	25	1"	16	77	44.5	46
C617-2016J	1.1/4"	20	2"	25	1"	16	82	50.8	46
C617-2020J	1.1/4"	20	2"	32	1.1/4"	20	85.6	50.8	50
C617-2420J	1.1/2"	24	2.3/8"	32	1.1/4"	20	95.6	60.3	50
C617-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	108.5	60.3	59.5
C617-3224J	2"	32	2.13/16"	38	1.1/2"	24	111	71.4	63
C617-3232J	2"	32	2.13/16"	50	2"	32	153	71.4	87.5



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice


SAE FLANGES

ORIGIN: NORTH AMERICA



C619 / C619L

3000 PSI CODE 61 90° FLANGED ELBOW
STANDARD & LONG DROP ELBOWS

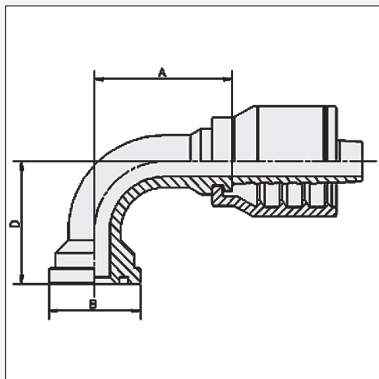

† Unique to Komatsu

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	
STANDARD DROP ELBOWS										
C619-0808K	1/2"	08	1.3/16"	12	1/2"	08	50	30	45	
C619-1010K †	5/8"	10	1.3/8"	16	5/8"	10	60.5	34.1	55	
C619-1208K	3/4"	12	1.1/2"	12	1/2"	08	49.5	38	49	
C619-1210K	3/4"	12	1.1/2"	16	5/8"	10	55.5	38	55	
C619-1212J	3/4"	12	1.1/2"	20	3/4"	12	63.7	38	56.5	
C619-1612J	1"	16	1.3/4"	20	3/4"	12	62.7	44.5	59.5	
C619-1616J	1"	16	1.3/4"	25	1"	16	71	44.5	61	
C619-1620J	1"	16	1.3/4"	32	1.1/4"	20	104	44.5	93	
C619-2012J	1.1/4"	20	2"	20	3/4"	12	62.2	50.8	62	
C619-2016J	1.1/4"	20	2"	25	1"	16	71	50.8	61	
C619-2020J	1.1/4"	20	2"	32	1.1/4"	20	87	50.8	69.2	
C619-2420J	1.1/2"	24	2.3/8"	32	1.1/4"	20	87	60.3	69.2	
C619-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	104	60.3	81	
C619-3224J	2"	32	2.13/16"	38	1.1/2"	24	102	71.4	85	
C619-3232J	2"	32	2.13/16"	50	2"	32	130	71.4	123	
C619-4032J	2.1/2"	40	3.5/16"	50	2"	32	142	84.1	132	
C619-4040J	2.1/2"	40	3.5/16"	62	2.1/2"	40	117	84.1	118	
C619-4840J	3"	48	4"	62	2.1/2"	40	136.2	101.6	125	
C619-4848J	3"	48	4"	80	3"	48	153	101.6	145	
LONG DROP ELBOWS										
C619L-1212J-100	3/4"	12	1.1/2"	20	3/4"	12	62.2	38	100	
C619L-1212J-125	3/4"	12	1.1/2"	20	3/4"	12	63.7	38	125	
C619L-1616J-120	1"	16	1.3/4"	25	1"	16	76	44.5	120	
C619L-2016J-120	1.1/4"	20	2"	25	1"	16	75	50.8	120	
C619L-2020J-100	1.1/4"	20	2"	32	1.1/4"	20	87	50.8	100	
C619L-2020J-120	1.1/4"	20	2"	32	1.1/4"	20	87	50.8	120	
C619L-2020J-130	1.1/4"	20	2"	32	1.1/4"	20	87	50.8	130	
C619L-2020J-170	1.1/4"	20	2"	32	1.1/4"	20	87	50.8	170	
C619L-2416J-107	1.1/2"	24	2.3/8"	25	1"	16	79	60.3	107	
C619L-2420J-117	1.1/2"	24	2.3/8"	32	1.1/4"	20	87	60.3	117	
C619L-2420J-130	1.1/2"	24	2.3/8"	32	1.1/4"	20	87	60.3	130	
C619L-2424J-150	1.1/2"	24	2.3/8"	38	1.1/2"	24	104	60.3	150	
C619L-2424J-170	1.1/2"	24	2.3/8"	38	1.1/2"	24	104	60.3	170	
C619L-2424J-200	1.1/2"	24	2.3/8"	38	1.1/2"	24	104	60.3	200	
C619L-2432J-170	1.1/2"	24	2.3/8"	50	2"	32	115	60.3	170	
C619L-3224J-114	2"	32	2.13/16"	38	1.1/2"	24	106	71.4	114	
C619L-3224J-171	2"	32	2.13/16"	38	1.1/2"	24	106	71.4	171	
C619L-3232J-165	2"	32	2.13/16"	50	2"	32	137.2	71.4	165	
C619L-3232J-203	2"	32	2.13/16"	50	2"	32	132.3	71.4	203	
C619L-3240J-121	2"	32	2.13/16"	63	2.1/2"	40	117	71.4	121	

SAE FLANGES

ORIGIN: NORTH AMERICA




K, J, 2J SERIES

CODE 61 / 62 SAE FLANGE

C6111 / C6111L

3000 PSI CODE 61

110° ELBOW FLANGE & LONG DROP 110° ELBOW FLANGE




Product Code	Flange			Hose Bore			Dimensions (mm)		
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D
C6111-1616J	1"	16	1.3/4"	25	1"	16	84.7	44.5	78
C6111-2016J	1 1/4"	20	2"	25	1"	16	76	50.8	81.5
C6111-2020J	1.1/4"	20	2"	32	1.1/4"	20	76	50.8	81.5
C6111-2420J	1.1/2"	24	2.3/8"	32	1.1/4"	20	76	60.3	81.5
C6111-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	90	60.3	96.5
C6111-3232J	2"	32	2.13/16"	50	2"	32	116.5	71.4	145
LONG DROP ELBOWS									
C6111L-2016J-133	1.1/4"	20	2"	25	1"	16	42.3	50.8	133
C6111L-2424J-118	1.1/2"	24	2.3/8"	38	1.1/2"	24	82.5	60.3	118

C6113

3000 PSI CODE 61


135° ELBOW FLANGE



Product Code	Flange			Hose Bore			Dimensions (mm)		
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D
C6113-1212J	3/4"	12	1.1/2"	20	3/4"	12	35.5	38	72
C6113-1616J	1"	16	1.3/4"	25	1"	16	73.7	44.5	87.3

C621/C621C

6000 PSI CODE 62 / SUPERCAT
STRAIGHT FLANGE




"Product Code"	Flange			Hose Bore			Dimensions mm		
	Bore	Size	Ø ins	DN	Inch	Size	A	C	E
C621-0808J	1/2"	08	1.1/4"	13	1/2"	08	39.7	31.7	7.8
C621-1212J	3/4"	12	1.5/8"	20	3/4"	12	43.5	41.3	8.8
C621-1612J	1"	16	1.7/8"	20	3/4"	12	59.0	47.6	9.5
C621-1216J	3/4"	12	1.5/8"	25	1"	16	56	41.3	8.8
C621-1616J	1"	16	1.7/8"	25	1"	16	60.5	47.6	9.5
C621-1620J	1"	16	1.7/8"	32	1.1/4"	20	67.4	47.6	9.5
C621-2016J	1.1/4"	20	2.1/8"	25	1"	16	67.5	54.0	10.3
C621-2020J	1.1/4"	20	2.1/8"	32	1.1/4"	20	71.9	54.0	10.3
C621-2420J	1.1/2"	24	2.3/8"	32	1.1/4"	20	81.4	63.5	12.6
C621-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	76.0	63.5	12.6
C621-3232J	2"	32	3.1/8"	50	2"	32	88.5	79.4	12.6
C621C-1212J	3/4"	12	1.5/8"	20	3/4"	12	49.5	41.3	14.5
C621C-1612J	1"	16	1.7/8"	20	3/4"	12	64.0	47.6	14.5
C621C-1616J	1"	16	1.7/8"	25	1"	16	65.5	47.6	14.5
C621C-2016J	1.1/4"	20	2.1/8"	25	1"	16	73.0	54.0	14.5
C621C-2020J	1.1/4"	20	2.1/8"	32	1.1/4"	20	76.1	54.0	14.5

C623

6000 PSI CODE 62

30° ELBOW FLANGE



"Product Code"	Flange			Hose Bore			Dimensions mm			
	Bore	Size	Ø ins	DN	Inch	Size	A	C	D	E
C623-1616J	1"	16	1.7/8"	25	1"	16	90	47.6	19	9.5



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice


SAE FLANGES

ORIGIN: NORTH AMERICA




C624/C624C

6000 PSI CODE 62 / SUPERCAT
45° ELBOW FLANGE




C626C

6000 PSI SUPERCAT
60° ELBOW FLANGE




C627C

6000 PSI SUPERCAT
67.5° ELBOW FLANGE



C629 / C629C

6000 PSI CODE 62 / SUPERCAT
90° ELBOW FLANGE



Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	E
C624-1212J	3/4"	12	1.5/8"	20	3/4"	12	68.7	41.3	27.9	8.8
C624-1612J	1"	16	1.7/8"	20	3/4"	12	74.7	47.6	33.9	9.5
C624-1616J	1"	16	1.7/8"	25	1"	16	78.9	47.6	30.8	9.5
C624-1620J	1"	16	1.7/8"	32	1.1/4"	20	115.5	47.6	38.1	9.5
C624-2016J	1.1/4"	20	2.1/8"	25	1"	16	95.0	54.0	39.0	10.3
C624-2020J	1.1/4"	20	2.1/8"	32	1.1/4"	20	115.5	54.0	43.8	10.3
C624-2420J	1.1/2"	24	2.3/8"	32	1.1/4"	20	117.5	63.5	48.0	12.6
C624-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	126.0	63.5	47.0	12.6
C624-3232J	2"	32	3.1/8"	50	2"	32	169.0	79.4	61.0	12.6
C624C-1212J	3/4"	12	1.5/8"	20	3/4"	12	85.4	41.3	32.5	14.5
C624C-1612J	1"	16	1.7/8"	20	3/4"	12	80.7	47.6	37.5	14.5
C624C-1616J	1"	16	1.7/8"	25	1"	16	82.2	54.0	34.7	14.5
C624C-2016J	1.1/4"	20	2.1/8"	25	1"	16	93.2	54.0	41.9	14.5

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	C	D	E
C626C-1616J	1"	16	1.7/8"	25	1"	16	103.0	54.0	47.8	14.5


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	C	D	E
C627C-1616J	1"	16	1.7/8"	25	1"	16	102.0	47.6	54.0	14.5

"Product Code"	Flange			Hose Bore			Dimensions mm			
	Bore	Size	Ø ins	DN	Inch	Size	A	C	D	E
C629-0808J	1/2"	08	1.1/4"	13	1/2"	08	49.7	31.7	47.0	7.8
C629-0810J	1/2"	08	1.1/4"	16	5/8"	10	55.0	31.7	52.0	7.8
C629-1210J	3/4"	12	1.5/8"	16	5/8"	10	53.5	41.3	58.0	8.8
C629-1212J	3/4"	12	1.5/8"	20	3/4"	12	55.5	41.3	56.5	8.8
C629-1612J	1"	16	1.7/8"	20	3/4"	12	55.5	47.6	65.0	9.5
C629-1616J	1"	16	1.7/8"	25	1"	16	76.0	47.6	66.0	9.5
C629-1616J-130	1"	16	1.7/8"	25	1"	16	76.0	47.6	130.0	9.5
C629-1620J	1"	16	1.7/8"	32	1.1/4"	20	104.0	47.6	87.0	9.5
C629-2016J	1.1/4"	20	2.1/8"	25	1"	16	78.5	54.0	79.5	10.3
C629-2020J	1.1/4"	20	2.1/8"	32	1.1/4"	20	104.0	54.0	86.0	10.3
C629-2420J	1.1/2"	24	2.3/8"	32	1.1/4"	20	104.2	63.5	98.0	12.6
C629-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	111.0	63.5	104.0	12.6
C629-3232J	2"	32	3.1/8"	50	2"	32	149.3	79.4	134.0	12.6
C629C-1212J	3/4"	12	1.5/8"	20	3/4"	12	55.5	41.3	62.0	14.5
C629C-1212J-156	3/4"	12	1.5/8"	20	3/4"	12	62.5	41.3	155.7	14.5
C629C-1612J	1"	16	1.7/8"	20	3/4"	12	55.5	47.6	70.0	14.5
C629C-1616J	1"	16	1.7/8"	25	1"	16	75.6	54.0	71.0	14.5
C629C-2016J	1.1/4"	20	2.1/8"	25	1"	16	74.6	54.0	84.0	14.5

This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice


SAE FLANGES

ORIGIN: NORTH AMERICA

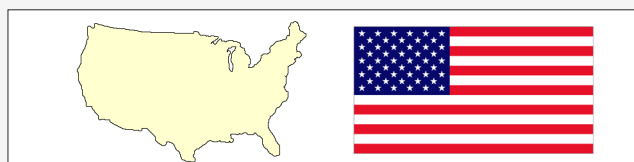

C621TF


6000 PSI CODE 62 TAPERED STRAIGHT FLANGE



"Product Code"	Flange		Hose Bore			Dimensions (mm)			
	Bore	Size	DN	Inch	Size	A	c	S	
C621TF-1616J	1"	16	25	1"	16	80	47.6	31	
C621TF-2016J	1.1/4"	20	25	1"	16	79	54	35	

C624TF


6000 PSI CODE 62 TAPERED 45° FLANGE



"Product Code"	Flange		Hose Bore			Dimensions (mm)			
	Bore	Size	DN	Inch	Size	A	D	C	S
C624TF-1616J-050	1"	16	25	1"	16	101	50	47.6	31
C624TF-2016J-050	1.1/4"	20	25	1"	16	104	50	54	35

C629TF

6000 PSI CODE 62 TAPERED 90° FLANGE



"Product Code"	Flange		Hose Bore			Dimensions (mm)			
	Bore	Size	DN	Inch	Size	A	D	C	S
C629TF-1616J-090	1"	16	25	1"	16	75	90	47.6	31
C629TF-2016J-105	1.1/4"	20	25	1"	16	81	105	54	35

JAPANESE FITTINGS


ORIGIN: JAPAN



JBF1

JIS BSPP

FEMALE STRAIGHT (MITSUBISHI)

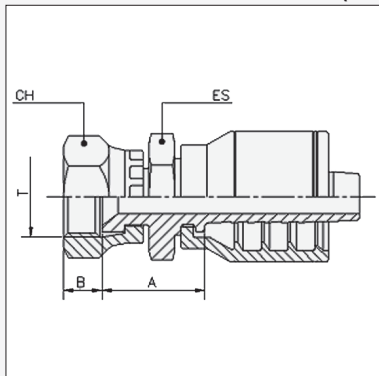


Product Code	Thread			Hose Bore			Dimensions (mm)			
	BSPP	Size	Pipe	DN	Inch	Size	A	B	CH	ES
JBF1-0404K	1/4" - 19	04	1/4"	06	1/4"	04	21	8	19	19
JBF1-0604K	3/8" - 19	6	3/8"	6	1/4"	4	22	9.5	22	19
JBF1-0606K	3/8" - 19	06	3/8"	10	3/8"	06	22	9.5	22	19
JBF1-0808K	1/2" - 14	08	1/2"	12	1/2"	08	24.9	11	27	22
JBF1-1212J	3/4" - 14	12	3/4"	20	3/4"	12	29.5	12.5	32	30
JBF1-1616J	1" - 11	16	1"	25	1"	16	34.1	14	38	32

JBF9

JIS BSPP



FEMALE 90 ° (MITSUBISHI)

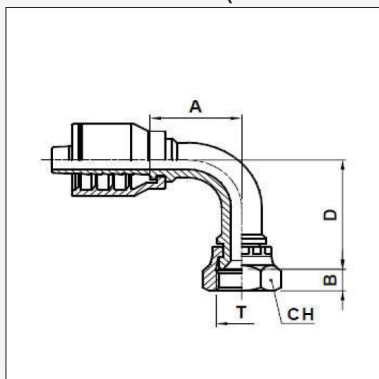

"Product Code"	Thread			Hose Bore			Dimensions mm			
	BSPP	Size	Pipe	DN	Inch	Size	A	B	D	CH
JBF9-0404K	1/4" - 19	04	1/4"	6	1/4"	04	25.3	8	24.5	19
JBF9-0604K	3/8" - 19	06	3/8"	6	1/4"	04	25.3	9.5	26	22
JBF9-0606K	3/8" - 19	06	3/8"	10	3/8"	06	36	9.5	30	22
JBF9-0808K	1/2" - 14	08	1/2"	12	1/2"	08	38.5	11	42	27

JAPANESE FITTINGS

ORIGIN: JAPAN




K, J, 2J SERIES

JAPANESE FITTINGS

JMF1

JIS METRIC

FEMALE STRAIGHT (KOMATSU)

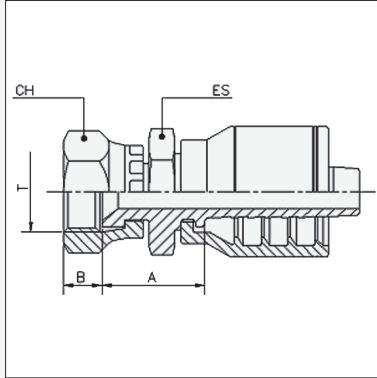


Product Code	Thread			Hose Bore			Dimensions (mm)			
	Metric	Size	Pipe	DN	Inch	Size	A	B	CH	ES
JMF1-1204K	M12 x 1.5	12	12	06	1/4"	04	22.5	8.7	17	14
JMF1-1404K	M14 x 1.5	14	14	06	1/4"	04	24	10	19	19
JMF1-1406K	M14 x 1.5	14	14	10	3/8"	06	25	10	19	19
JMF1-1606K	M16 x 1.5	16	16	10	3/8"	06	23.2	9.3	22	19
JMF1-1806K	M18 x 1.5	18	18	10	3/8"	06	24	11.5	24	19
JMF1-2006K	M20 x 1.5	20	20	10	3/8"	06	25.3	11.2	27	19
JMF1-2206K	M22 x 1.5	22	22	10	3/8"	06	25.5	14	27	19
JMF1-2208K	M22 x 1.5	22	22	12	1/2"	08	27	14	27	22
JMF1-2408K	M24 x 1.5	24	24	12	1/2"	08	28.4	15.1	32	24
JMF1-2410K	M24 x 1.5	24	24	16	5/8"	10	28.4	15.1	32	24
JMF1-2412J	M24 x 1.5	24	24	20	3/4"	12	32.4	15.1	32	27
JMF1-3012J	M30 x 1.5	30	30	20	3/4"	12	34.7	18.3	36	30
JMF1-3312J	M33 x 1.5	33	33	20	3/4"	12	33.7	21.3	41	32
JMF1-3612J	M36 x 1.5	36	36	20	3/4"	12	34.7	20	46	41
JMF1-3316J	M33 x 1.5	33	33	25	1"	16	35.8	21.3	41	32
JMF1-3616J	M36 x 1.5	36	36	25	1"	16	37.3	20	46	41
JMF1-4220J	M42 x 1.5	42	42	32	1.1/4"	20	46	18.8	55	50

KOBM1

JIS METRIC 24° SEAT


MALE STRAIGHT (KOBELCO)



Product Code	Thread			Hose Bore			Dimensions (mm)		
	Metric	Size	Pipe	DN	Inch	Size	A	B	ES
KOBM1-3012J	M30x1.5	30	30	20	3/4	12	32.5	14	36
KOBM1-3612J	M36x1.5	36	36	20	3/4	12	38	16	41
KOBM1-3616J	M36x1.5	36	36	25	1	16	39.1	16	41
KOBM1-4516J	M45x1.5	45	45	25	1	16	40	16	50


JAPANESE FITTINGS

ORIGIN: JAPAN



KC6112BF

KOMATSU LOW PRESSURE (80 BAR)
STRAIGHT FLANGE WITH 2 BOLT CLAMP

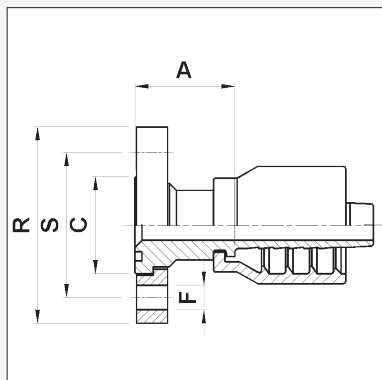


Product Code	Flange			Hose Bore			Dimensions (mm)					
	Bore	Size	ø ins.	DN	Inch	Size	A	R	S	C	F	
KC6112BF-1616J	1"	16	1.3/4"	25	1"	16	74.1	88	65	44.5	11	
KC6112BF-2020J	1.1/4"	20	2"	32	1.1/4"	20	82.9	102	75	50.8	13.5	
KC6112BF-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	91	111	85	60.3	13.5	

KOM identifier can vary between flange head and stem. Flange heads incorporate metric O-Ring dimensions
See page 28

KC6142BF

KOMATSU LOW PRESSURE (80 BAR)
45° ELBOW FLANGE WITH 2 BOLT CLAMP

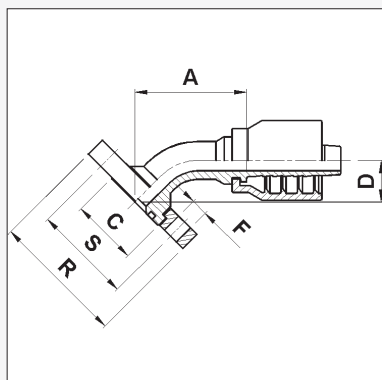


Product Code	Flange			Hose Bore			Dimensions (mm)					
	Bore	Size	ø ins.	DN	Inch	Size	A	R	S	C	F	D
KC6142BF-1616J	1"	16	1.3/4"	25	1"	16	84.1	88	65	44.5	11	30
KC6142BF-2020J	1.1/4"	20	2"	32	1.1/4"	20	107.9	102	75	50.8	13.5	32
KC6142BF-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	105	111	85	60.3	13.5	38

KOM identifier can vary between flange head and stem. Flange heads incorporate metric O-Ring dimensions
See page 28



KC6192BF

KOMATSU LOW PRESSURE (80 BAR)
90° ELBOW FLANGE WITH 2 BOLT CLAMP

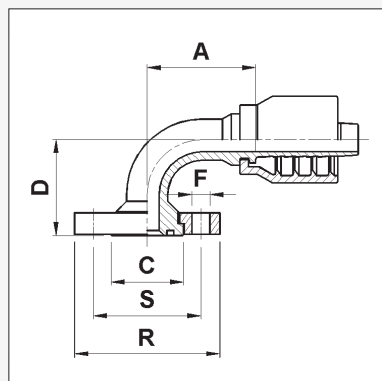


Product Code	Flange			Hose Bore			Dimensions (mm)					
	Bore	Size	ø ins.	DN	Inch	Size	A	R	S	C	F	D
KC6192BF-1616J	1"	16	1.3/4"	25	1"	16	79.1	88	65	44.5	11	70
KC6192BF-2020J	1.1/4"	20	2"	32	1.1/4"	20	102.9	102	75	50.8	13.5	80
KC6192BF-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	118	111	85	60.3	13.5	110

KOM identifier can vary between flange head and stem. Flange heads incorporate metric O-Ring dimensions
See page 28



KC611

KOMATSU STANDARD PRESSURE (210 BAR) STRAIGHT FLANGE

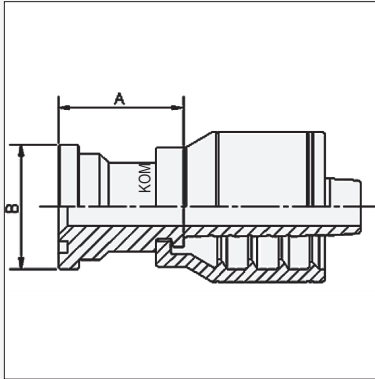


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	ø B		
C611-1010K	5/8"	10	1.3/8"	16	5/8"	10	65	34.1		
KC611-1212J	3/4"	12	1.1/2"	20	3/4"	12	72	38		
KC611-1612J	1"	16	1.3/4"	20	3/4"	12	71	44.45		
KC611-1616J	1"	16	1.3/4"	25	1"	16	74.1	44.45		
KC611-2016J	1.1/4"	20	2"	25	1"	16	81.1	50.8		
KC611-2020J	1.1/4"	20	2"	32	1.1/4"	20	82.9	50.8		
KC611-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	91	60.3		
KC611-3232J	2"	32	2.13/32"	50	2"	32	122.7	71.4		

KOM identifier can vary between flange head and stem. Flange heads incorporate metric O-Ring dimensions
See page 28

KC614

KOMATSU STANDARD PRESSURE (210 BAR) 45° ELBOW FLANGE

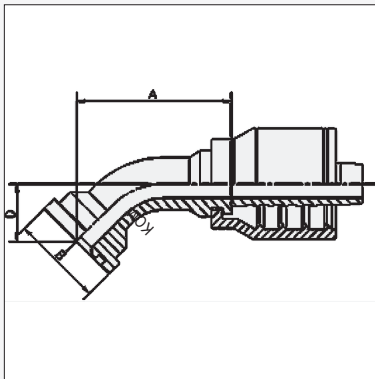


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	ø B	D	
C614-1010K	5/8"	10	1.11/32"	16	5/8"	10	66	34.1	26	
KC614-1212J	3/4"	12	1.1/2"	20	3/4"	12	70	38	26	
KC614-1612J	1"	16	1.3/4"	20	3/4"	12	73	44.5	31	
KC614-1616J	1"	16	1.3/4"	25	1"	16	84.1	44.5	30	
KC614-2016J	1.1/4"	20	2"	25	1"	16	87.1	50.8	28	
KC614-2020J	1.1/4"	20	2"	32	1.1/4"	20	107.9	50.8	32	
KC614-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	24	105	60.3	38	
KC614-3232J	2"	32	2.13/32"	50	2"	32	161.7	71.4	54	

KOM identifier can vary between flange head and stem. Flange heads incorporate metric O-Ring dimensions
See page 28

KC619

KOMATSU STANDARD PRESSURE (210 BAR) 90° ELBOW FLANGE

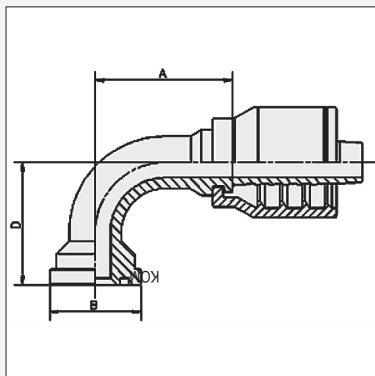

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	ø B	D	
C619-1010K	5/8"	10	1.3/8"	16	5/8"	5/8"	55.5	34.1	55	
KC619-1212J	3/4"	12	1.1/2"	20	3/4"	3/4"	64	38	55	
KC619-1612J	1"	16	1.3/4"	20	3/4"	3/4"	78	44.45	61	
KC619-1616J	1"	16	1.3/4"	25	1"	1"	79.1	44.45	70	
KC619-2020J	1.1/4"	20	2"	32	1.1/4"	1.1/4"	102.9	50.8	80	
KC619-2424J	1.1/2"	24	2.3/8"	38	1.1/2"	1.1/2"	118	60.3	110	
KC619-3232J	2"	32	2.13/32"	50	2"	2"	151.7	71.4	140	

KOM identifier can vary between flange head and stem. Flange heads incorporate metric O-Ring dimensions
See page 28


MISCELLANEOUS FITTINGS

PRESSURE WASHER AND WELD ON



KT1

KÄRCHER® STRAIGHT HOSE TAIL
COMPLETE WITH NUT

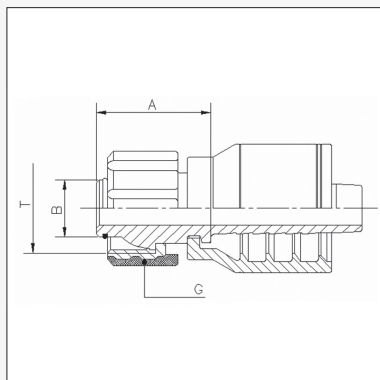

Product Code	Hose Bore			Dimensions (mm)			
	DN	Inch	Size	T	A	B	G
KT1-2204K	6	1/4"	4	M22 x 1.5	31	14	36
KT1-2205K	8	5/16"	5	M22 x 1.5	31	14	36
KT1-2206K	10	3/8"	6	M22 x 1.5	31	14	36

JWH


JET WASH HANDGRIP



Product Code	Hose Bore			Description
	DN	Inch	Size	
JWH-04	6	1/4"	04	Blue Anti Kink Hand Grip to suit JW210-04 hose
JWH-06	10	3/8"	06	Blue Anti Kink Hand Grip to suit JW210-06 & JW400-06 hose

KB (SUPERSEDED)

KÄRCHER® x BSPP ADAPTOR INSERT
SEE SECTION P ACCESSORIES IPW-26

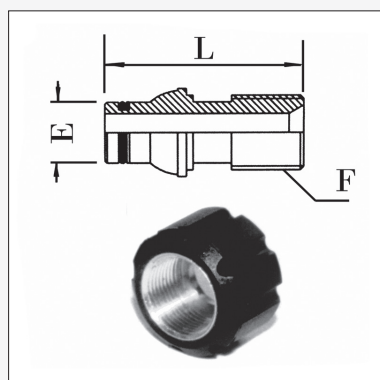

Product Code	Description	Nut Thread			Insert			Dimensions (mm)		
		Metric	Size	ø ins.	BSPP	Inch	Size	E	F	L
KB-22-06	Insert				3/8" - 19	06	3/8"	14	16.7	52
KN-22	Nut	M22 - 1.5	22	14						

MISCELLANEOUS FITTINGS

PRESSURE WASHER AND WELD ON




K, J, 2J SERIES

MISCELLANEOUS

WO1


WELD ON STRAIGHT TAIL
(LIFESAVER)

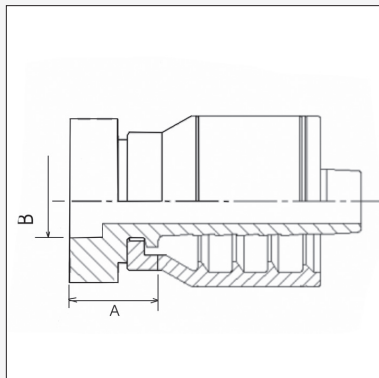

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	ø B		
WO1-0404K	04	04	1/4"	06	1/4"	04	14.5	6.5		
WO1-0606K	06	06	3/8"	10	3/8"	06	10.5	9.55		
WO1-0808K	08	08	1/2"	12	1/2"	08	17	12.85		
WO1-1010K	10	10	5/8"	16	5/8"	10	17	16		
WO1-1212J	12	12	3/4"	20	3/4"	12	20	19.2		
WO1-1616J	16	16	1"	25	1"	16	24.1	25.6		

HJ1


HOSE JOINER
CRIMP STYLE

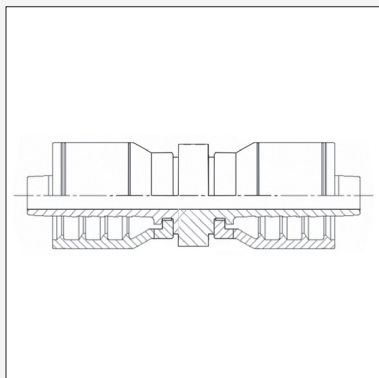

Product Code	Hose Tail			Hose Tail			Dimensions (mm)			
	DN	Inch	Size	DN	Inch	Size	A	L	d	
HJ1-0404K	06	1/4"	04	06	1/4"	04	8.4	48	4.3	
HJ1-0505K	08	5/16"	05	08	5/16"	05				
HJ1-0606K	10	3/8"	06	10	3/8"	06	8.4	52.4	7.6	
HJ1-0808K	12	1/2"	08	12	1/2"	08	8.4	61	9.9	
HJ1-1010K	16	5/8"	10	16	5/8"	10	9.4	88	12.2	
HJ1-1212J	20	3/4"	12	20	3/4"	12	10	87.2	15.5	
HJ1-1616J	25	1"	16	25	1"	16	22	124.8	19.8	

HJ9

HOSE JOINER 90°
CRIMP STYLE

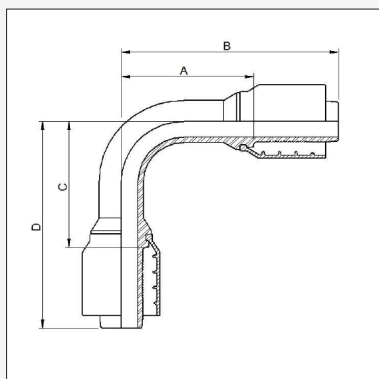

"Product Code"	Hose Bore			Dimensions mm			
	DN	Inch	Size	A	B	C	D
HJ9-1212J	19	3/4"	12	55.5	95	55.5	95
HJ9-1616J	25	1"	16	72	125	72	125


BSP FITTINGS

ORIGIN: GREAT BRITAIN



BF1


BSPP FEMALE STRAIGHT

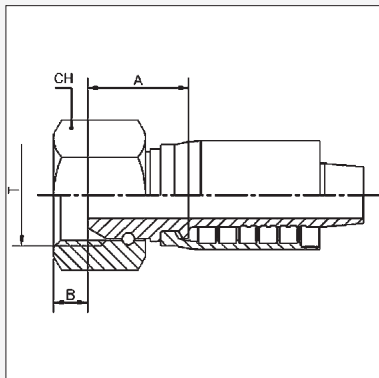

Product Code	BSPP Thread		Nominal ID			Dimensions mm			
	T	Size	Dash	Inch	DN	A	B	CH	
BF1-1212X	3/4" - 14	12	20	3/4"	12	27.9	8.7	32	
BF1-1616X	1" - 11	16	25	1"	16	31.3	10.5	38	
BF1-2020X	1.1/4" - 11	20	32	1.1/4"	20	37.8	10	50	
BF1-2424X	1.1/2" - 11	24	38	1.1/2"	24	38.3	12	55	
BF1-3232X	2" - 11	32	50	2"	32	40.6	16	70	

BF4

BSPP FEMALE 45° ELBOW

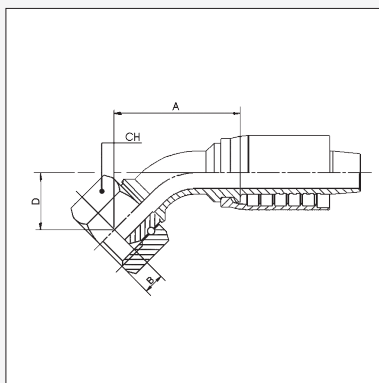


Product Code	BSPP Thread		Nominal ID			Dimensions mm			
	T	Size	Dash	Inch	DN	A	B	CH	D
BF4-1212X	3/4" - 14	12	20	3/4"	12	74.2	8.7	32	28.3
BF4-1616X	1" - 11	16	25	1"	16	89.3	10.5	38	32
BF4-2020X	1.1/4" - 11	20	32	1.1/4"	20	106.4	10	50	37.7
BF4-2424X	1.1/2" - 11	24	38	1.1/2"	24	162	12	55	51
BF4-3232X	2" - 11	32	50	2"	32	197	16	70	65.5



BF9


BSPP FEMALE 90° ELBOW

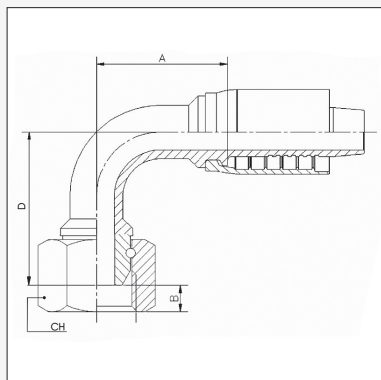

Product Code	BSPP Thread		Nominal ID			Dimensions mm			
	T	Size	Dash	Inch	DN	A	B	CH	D
BF9-1212X	3/4" - 14	12	20	3/4"	12	66.8	8.7	32	58.8
BF9-1616X	1" - 11	16	25	1"	16	77.3	10.5	38	71
BF9-2020X	1.1/4" - 11	20	32	1.1/4"	20	91.5	10	50	83
BF9-2424X	1.1/2" - 11	24	38	1.1/2"	24	132	12	55	108
BF9-3232X	2" - 11	32	50	2"	32	157	16	70	140

BTM1

BSPT MALE STRAIGHT

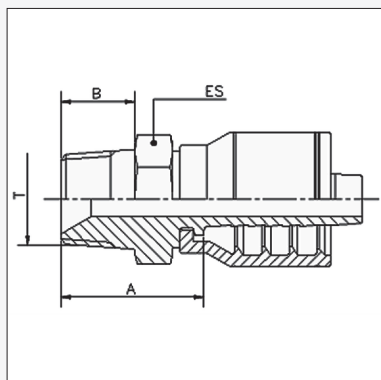

Product Code	BSPT Thread		Nominal ID			Dimensions mm			
	T	Size	Dash	Inch	DN	A	B	ES	
BTM1-2020X	1.1/4" - 11	20	32	1.1/4"	20	52.9	25	46	
BTM1-2424X	1.1/2" - 11	24	38	1.1/2"	24	53.5	25	50	
BTM1-3232X	2" - 11	32	50	2"	32	63.7	28	65	


NPT FITTINGS

ORIGIN: NORTH AMERICA



NM1

NPT MALE STRAIGHT

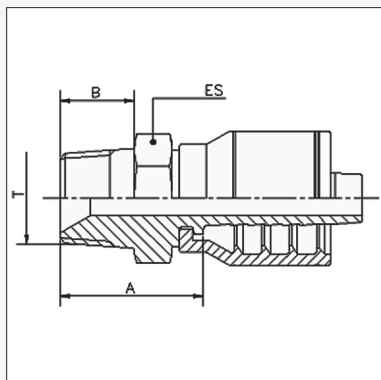


Product Code	NPT Thread		Nominal ID			Dimensions mm			
	T	Size	Dash	Inch	DN	A	B	ES	
NM1-2020X	1.1/4" - 11½	20	32	1.1/4"	20	62.9	24.5	46	
NM1-2424X	1.1/2" - 11½	24	38	1.1/2"	24	61.5	25.5	50	
NM1-3232X	2" - 11½	32	50	2"	32	79.7	26	65	



JF1

JIC FEMALE STRAIGHT

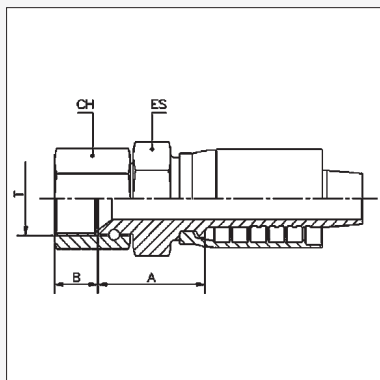


Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	ES
JF1-1712X †	1.1/16" - 12	17	12	20	3/4"	12	37.1	13.8	32	27
JF1-2116X †	1.5/16" - 12	21	16	25	1"	16	37.3	16	38	36
JF1-2620X †	1.5/8" - 12	26	20	32	1.1/4"	20	51.5	16	50	41
JF1-3024X †	1.7/8" - 12	30	24	38	1.1/2"	24	54.4	18.5	55	50
JF1-4032X †	2.1/2" - 12	40	32	50	2"	32	77.7	24	75	65

† Thrust wired nut

JF4

JIC FEMALE 45° ELBOW

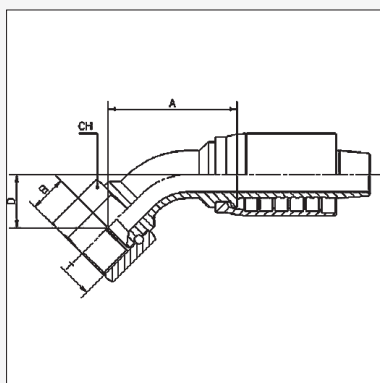

Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
JF4-1712X †	1.1/16" - 12	17	12	20	3/4"	12	79.3	13.5	30.5	32
JF4-2116X †	1.5/16" - 12	21	16	25	1"	16	89.3	16	32	38
JF4-2620X †	1.5/8" - 12	26	20	32	1.1/4"	20	99.4	16	36.3	50
JF4-3024X †	1.7/8" - 12	30	24	38	1.1/2"	24	162.5	18.5	50	55
JF4-4032X †	2½" - 12	40	32	50	2"	32	197	24	65.5	75

† Thrust wired nut


JIC FITTINGS

ORIGIN: NORTH AMERICA



JF9

JIC FEMALE 90° ELBOW

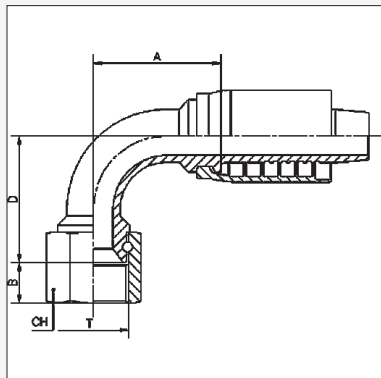


Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
JF9-1712X †	1.1/16" - 12	17	12	20	3/4"	12	71	13.8	58.8	32
JF9-2116X †	1.5/16" - 12	21	16	25	1"	16	77.3	16	71	38
JF9-2620X †	1.5/8" - 12	26	20	32	1.1/4"	20	84.4	16	77	50
JF9-3024X †	1.7/8" - 12	30	24	38	1.1/2"	24	128.5	18.5	105	55
JF9-4032X †	2 1/2" - 12	40	32	50	2"	32	157	24	140	75

† Thrust wired nut

JM1

JIC MALE STRAIGHT

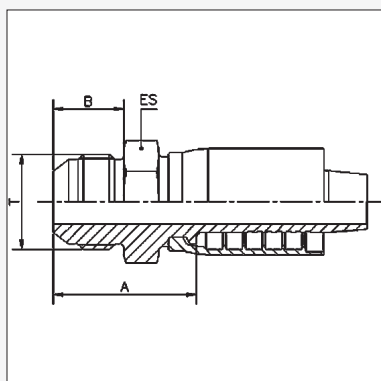


Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	ES	
JM1-2620X †	1.5/8" - 12	26	20	32	1.1/4"	20	62.7	24.3	46	
JM1-3024X †	1.7/8" - 12	30	24	38	1.1/2"	24	63.5	27.5	50	
JM1-4032X †	2 1/2" - 12	40	32	50	2"	32	87.6	33.9	65	



OF1


O-RING FACE SEAL FEMALE STRAIGHT

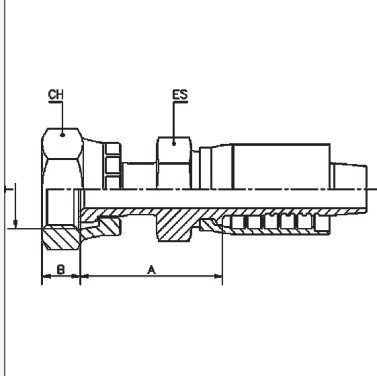

Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	ES
OF1-1212X	1.3/16" - 12	12	12	20	3/4"	12	45.7	14.5	36	30
OF1-1616X	1.7/16" - 12	16	16	25	1"	16	52.8	14.8	41	36
OF1-2020X	1.11/16" - 12	20	20	32	1.1/4"	20	55.9	14.8	50	41
OF1-2424X	2" - 12	24	24	25	1.1/2"	24	58.7	14.8	60	50

OF4


O-RING FACE SEAL FEMALE 45° ELBOW

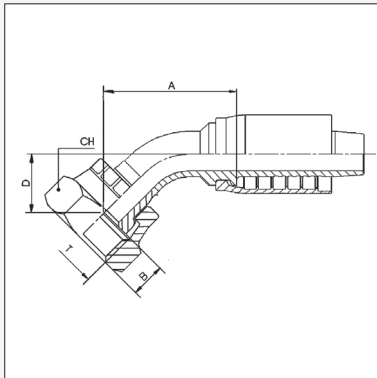

Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	D
OF4-1212X	1.3/16" - 12	12	12	20	3/4"	12	70.5	14.5	36	23.2
OF4-1616X	1.7/16" - 12	16	16	25	1"	16	88.3	14.8	41	31
OF4-2020X	1.11/16" - 12	20	20	32	1.1/4"	20	99.4	14.8	50	36.3

OF9

O-RING FACE SEAL FEMALE 90° ELBOW

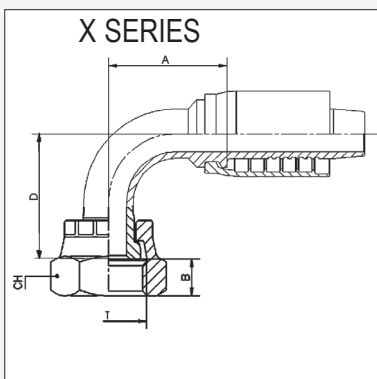

Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	D
OF9-1212X	1.3/16" - 12	12	12	20	3/4"	12	66	14.5	36	51.5
OF9-1616X	1.7/16" - 12	16	16	25	1"	16	77.3	14.8	41	71
OF9-2020X	1.11/16" - 12	20	20	32	1.1/4"	20	84.4	14.8	50	77
OF9-2424X	2" - 12	24	24	38	1.1/2"	24	115	14.8	60	102


METRIC FITTINGS

ORIGIN: GERMANY



DSF1


DKS (HEAVY) METRIC FEMALE
STRAIGHT

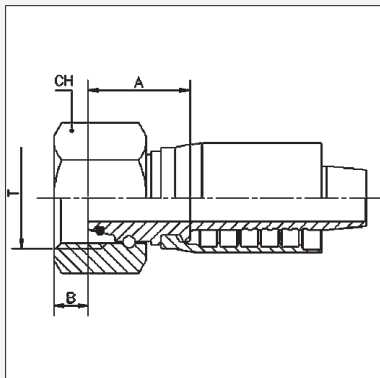

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	
DSF1-3012X	M30 x 2	30	20 S	20	3/4"	12	34	3.5	36	
DSF1-3612X	M36 x 2	36	25 S	20	3/4"	12	41.6	3	46	
DSF1-4216X	M42 x 2	42	30 S	25	1"	16	36.8	6	50	
DSF1-5220X	M52 x 2	52	38 S	32	1.1/4"	20	48.9	6.5	60	

DSM1

DKS (HEAVY) METRIC MALE
STRAIGHT

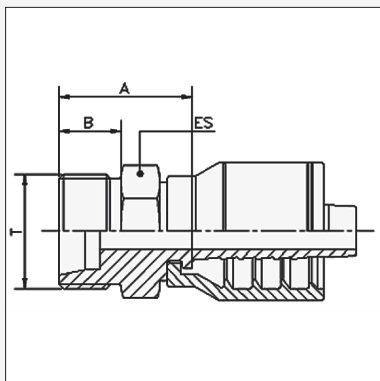

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	ES	
DSM1-4216X	M42 x 2	42	30 S	25	1"	16	45.8	20	46	
DSM1-5220X	M52 x 2	52	38 S	32	1.1/4"	20	49.9	22	55	

METRIC FITTINGS

ORIGIN: GERMANY




X SERIES

DSF4

DKS (HEAVY) METRIC FEMALE

45° ELBOW

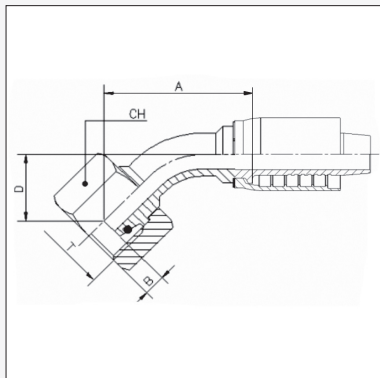


Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
DSF4-3012X	M30 x 2	20	20 S	20	3/4"	12				
DSF4-4216X	M42 x 2	42	30 S	25	1"	16	103.3	6	42	50
DSF4-5220X	M52 x 2	52	38 S	32	1.1/4"	20	123.3	6.5	45.6	60

METRIC FITTINGS

DSF9

DKS (HEAVY) METRIC FEMALE

90° ELBOW

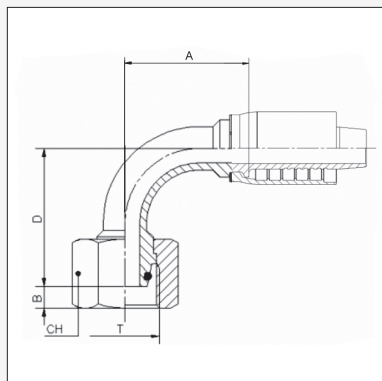

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
DSF9-3012X	M30 x 2	20	20 S	20	3/4"	12				
DSF9-4216X	M42 x 2	42	30 S	25	1"	16	86.8	6	81.5	50
DSF9-5220X	M52 x 2	52	38 S	32	1.1/4"	20	95.6	6.5	104	60


SAE FLANGES

ORIGIN: NORTH AMERICA



C611


3000 PSI CODE 61
STRAIGHT FLANGE

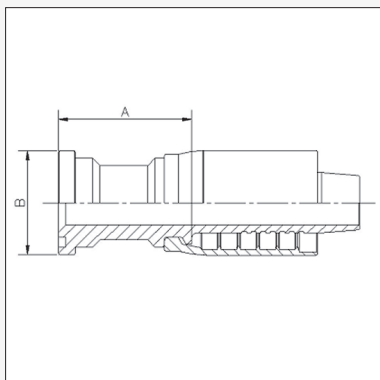

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB		
C611-2020X	1.1/4"	20	2"	32	1.1/4"	20	51.4	50.8		
C611-2420X	1.1/4"	24	2.3/8"	32	1.1/4"	20	61.4	60.3		
C611-2424X	1.1/2"	24	2.3/8"	38	1.1/2"	24	62	60.3		
C611-3224X	1.1/2"	32	2.13/16"	38	1.1/2"	24	77	71.4		
C611-3232X	2"	32	2.13/16"	50	2"	32	95.7	71.4		

C614


3000 PSI CODE 61
45° ELBOW FLANGE

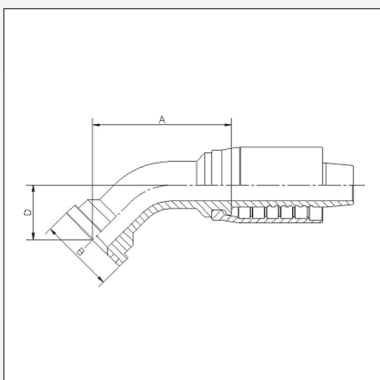

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	
C614-1620X	1.1/4"	20	2"	25	1"	16	130	50.8	43.5	
C614-2020X	1.1/4"	20	2"	32	1.1/4"	20	130	50.8	43.5	
C614-2420X	1.1/2"	24	2.3/8"	32	1.1/4"	20	126	60.3	38	
C614-2424X	1.1/2"	24	2.3/8"	38	1.1/2"	24	152	60.3	47	
C614-3224X	2"	32	2.13/16"	38	1.1/2"	24	137	71.4	47	
C614-3232X	2"	32	2.13/16"	50	2"	32	155	71.4	53	

C619

3000 PSI CODE 61
90° ELBOW FLANGE

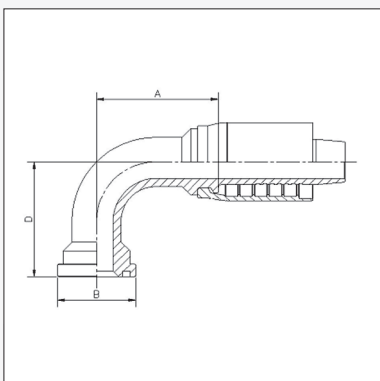


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	
C619-2020X	1.1/4"	20	2"	32	1.1/4"	20	87	50.8	69	
C619-2420X	1.1/2"	24	2.3/8"	32	1.1/4"	20	108	60.3	90	
C619-2424X	1.1/2"	24	2.3/8"	38	1.1/2"	24	132	60.3	103.5	
C619-3224X	2"	32	2.13/16"	38	1.1/2"	24	116	71.4	104	
C619-3232X	2"	32	2.13/16"	50	2"	32	155	71.4	123	



C621

6000 PSI CODE 62
STRAIGHT FLANGE

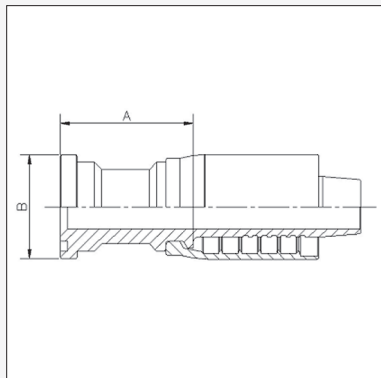


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB		
C621-1212X	3/4"	12	1.5/8"	20	3/4"	12	55.6	41.3		
C621-1612X	1"	16	1.7/8"	20	3/4"	12	66.1	47.6		
C621-1616X	1"	16	1.7/8"	25	1"	16	66.3	47.6		
C621-2016X	1.1/4"	20	2.1/8"	25	1"	16	75.8	54		
C621-1620X	1"	16	1.7/8"	32	1.1/4"	20	68	47.6		
C621-2020X	1.1/4"	20	2.1/8"	32	1.1/4"	20	76.9	54		
C621-2420X	1.1/2"	24	2.1/2"	32	1.1/4"	20	81.4	63.5		
C621-2424X	1.1/2"	24	2.1/2"	38	1.1/2"	24	82	63.5		
C621-3224X	2"	32	3.1/8"	38	1.1/2"	24	110.5	79.4		
C621-3232X	2"	32	3.1/8"	50	2"	32	115.7	79.4		
C621-3232XL *	2"	32	3.1/8"	50	2"	32	127	79.4		

* XL Series incorporates an extra long ferrule for extreme applications

C621C


6000 PSI SUPERCAT
STRAIGHT SUPERCAT FLANGE

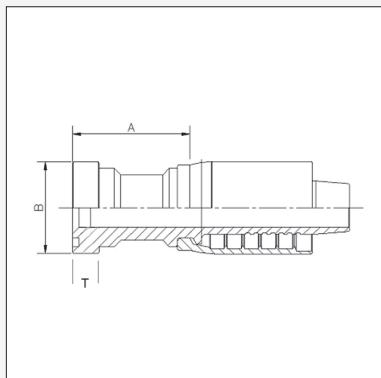

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	
C621C-1212X	3/4"	12	1.5/8"	20	3/4"	12	61.4	41.3	14.2	
C621C-1612X	1"	16	1.7/8"	20	3/4"	12	71.1	47.6	14.2	
C621C-1616X	1"	16	1.7/8"	25	1"	16	71.3	47.6	14.2	
C621C-2016X	1.1/4"	20	2.1/8"	25	1"	16	80	54	14.2	
C621C-2020X	1.1/4"	20	2.1/8"	32	1.1/4"	20	76	54	14.2	
C621C-2420X	1.1/2"	24	2.1/2"	32	1.1/4"	20	82.4	63.5	14.2	
C621C-2424X	1.1/2"	24	2.1/2"	38	1.1/2"	24	84	63.5	14.2	
C621C-3224X	2"	32	3.1/8"	38	1.1/2"	24	110.5	79.4	14.2	
C621C-3232X	2"	32	3.1/8"	50	2"	32	115.7	79.4	14.2	

C622C

6000 PSI SUPERCAT
22½° ELBOW SUPERCAT FLANGE

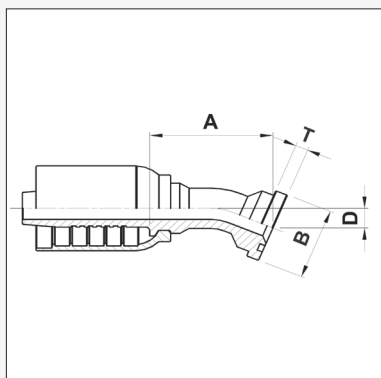

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	D
C622C-2020X	1.1/4"	20	2.1/8"	32	1.1/4"	20	131.5	54	14.2	21
C622C-2420X	1.1/2"	24	2.1/2"	32	1.1/4"	20	133	63.5	14.2	22.5

SAE FLANGES


ORIGIN: NORTH AMERICA



C623C

6000 PSI SUPERCAT

30° ELBOW SUPERCAT FLANGE

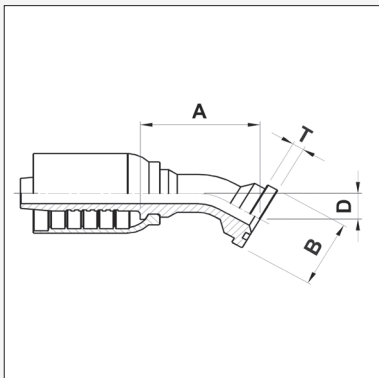


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	D
C623C-2020X	1.1/4"	20	2.1/8"	32	1.1/4"	20	128.5	54	14.2	29
C623C-2420X	1.1/2"	24	2.1/2"	32	1.1/4"	20	129.5	63.5	14.2	31
C623C-2424X	1.1/2"	24	2.1/2"	38	1.1/2"	24	147	63.5	14.2	29.5

C624

6000 PSI CODE 62

45° ELBOW FLANGE

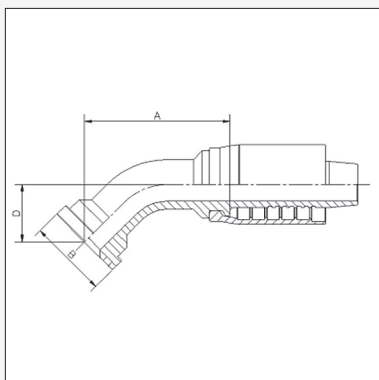

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	
C624-1212X	3/4"	12	1.5/8"	20	3/4"	12	78.8	41.3	29.5	
C624-1612X	1"	16	1.7/8"	20	3/4"	12	79.5	47.6	34.6	
C624-1616X	1"	16	1.7/8"	25	1"	16	84.3	47.6	31	
C624-2016X	1.1/4"	20	2.1/8"	25	1"	16	95.8	54	39	
C624-1620X	1"	16	1.7/8"	32	1.1/4"	20	115.5	47.6	43.5	
C624-2020X	1.1/4"	20	2.1/8"	32	1.1/4"	20	115.5	54	43.5	
C624-2420X	1.1/2"	24	2.1/2"	32	1.1/4"	20	117.5	63.5	48	
C624-2424X	1.1/2"	24	2.1/2"	38	1.1/2"	24	152	63.5	47	
C624-3224X	2"	32	3.1/8"	38	1.1/2"	24	167	79.4	57	
C624-3232X	2"	32	3.1/8"	50	2"	32	174	79.4	61	
C624-3232XL *	2"	32	3.1/8"	50	2"	32	170.7	79.4	71	


* XL Series incorporates an extra long ferrule for extreme applications



C624C

6000 PSI SUPERCAT

45° ELBOW SUPERCAT FLANGE

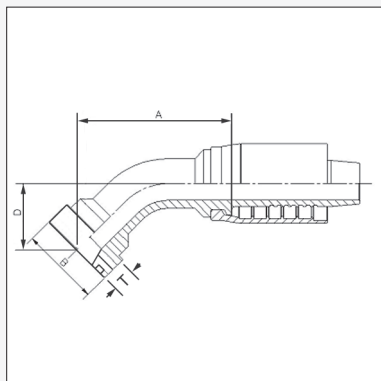


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	T
C624C-1212X	3/4"	12	1.5/8"	20	3/4"	12	81.4	41.3	33.5	14.2
C624C-1612X	1"	16	1.7/8"	20	3/4"	12	82.3	47.6	37.5	14.2
C624C-1616X	1"	16	1.7/8"	25	1"	16	87.8	47.6	34.5	14.2
C624C-1620X	1"	16	1.7/8"	32	1.1/4"	20	98.8	47.6	42	14.2
C624C-2016X	1.1/4"	20	2.1/8"	25	1"	16	118.5	54	46.5	14.2
C624C-2020X	1.1/4"	20	2.1/8"	32	1.1/4"	20	118.5	54	46.5	14.2
C624C-2420X	1.1/2"	24	2.1/2"	32	1.1/4"	20	118.5	63.5	46.5	14.2
C624C-2424X	1.1/2"	24	2.1/2"	38	1.1/2"	24	153.5	63.5	48.5	14.2
C624C-3232X	2"	32	3.1/8"	50	2"	32	182.5	79.4	61.5	14.2

C626

6000 PSI CODE 62

60° ELBOW FLANGE

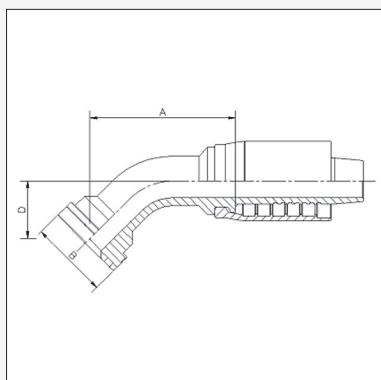


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	T
C626-1616X	1"	16	1.7/8"	25	1"	16	107.8	47.6	47	
C626-2016X	1.1/4"	20	2.1/8"	25	1"	16	107.8	54	47	
C626-2020X	1.1/4"	20	2.1/8"	32	1.1/4"	20	113	54	55	
C626-2420X	1.1/2"	24	2.1/2"	32	1.1/4"	20	113	63.5	55	
C626-2424X	1.1/2"	24	2.1/2"	38	1.1/2"	24	175.5	63.5	69.5	
C626-3224X	2"	32	3.1/8"	38	1.1/2"	24	195.5	79.4	69.5	
C626-3232X	2"	32	3.1/8"	50	2"	32	215.5	79.4	90	

C626C

6000 PSI SUPERCAT

60° ELBOW SUPERCAT FLANGE

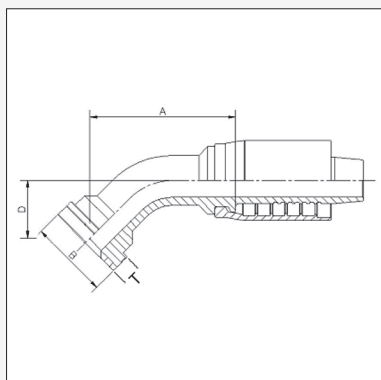

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	T
C626C-2020X	1.1/4"	20	2.1/8"	32	1.1/4"	20	132	54	59	14.2
C626C-2420X	1.1/2"	24	2.1/2"	32	1.1/4"	20	137	63.5	65.5	14.2
C626C-2424X	1.1/2"	24	2.1/2"	38	1.1/2"	24	153.5	63.5	71.5	14.2

SAE FLANGES


ORIGIN: NORTH AMERICA



C627C

6000 PSI CODE 62

67° ELBOW SUPERCAT FLANGE

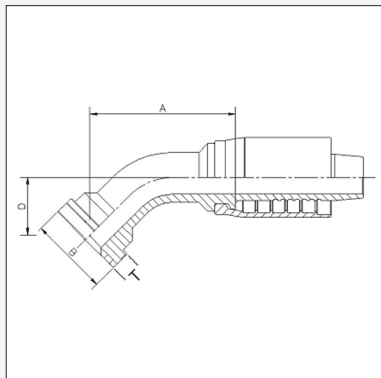


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	T
C627C-2020X	1.1/4"	20	2.1/8"	32	1.1/4"	20		54		14.2
C627C-2420X	1.1/2"	24	2.1/2"	32	1.1/4"	20		63.5		14.2

C629 / C629L

6000 PSI CODE 62

STANDARD AND LONG DROP 90° ELBOW FLANGE

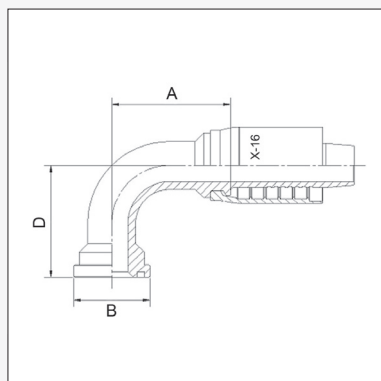

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	T
C629-1212X	3/4"	12	1.5/8"	20	3/4"	12	68.8	41.3	60.5	
C629-1612X	1"	16	1.7/8"	20	3/4"	12	66.8	47.6	65	
C629-1616X	1"	16	1.7/8"	25	1"	16	80.8	47.6	66	
C629-2016X	1.1/4"	20	2.1/8"	25	1"	16	84.8	54	80	
C629-1620X	1"	16	1.7/8"	32	1.1/4"	20	109.5	47.6	87	
C629-2020X	1.1/4"	20	2.1/8"	32	1.1/4"	20	104	54	86	
C629-2420X	1.1/2"	24	2.1/2"	32	1.1/4"	20	104.2	63.5	98	
C629-2424X	1.1/2"	24	2.1/2"	38	1.1/2"	24	129	63.5	107	
C629-3224X	2"	32	3.1/8"	38	1.1/2"	24	129	79.4	119.5	
C629-3232X	2"	32	3.1/8"	50	2"	32	162	79.4	134	
C629-3232XL *	2"	32	3.1/8"	50	2"	32	156.7	79.4	138	
LONG DROP ELBOWS										
C629L-1616X-130	1"	16	1.7/8"	25	1"	16	86.5	47.6	130	
C629L-2020X-130	1.1/4"	20	2.1/8"	32	1.1/4"	20	104	54	130	

* XL Series incorporates an extra long ferrule for extreme applications

SAE FLANGES

ORIGIN: NORTH AMERICA




X SERIES

C629C

6000 PSI SUPERCAT

90° ELBOW SUPERCAT FLANGE

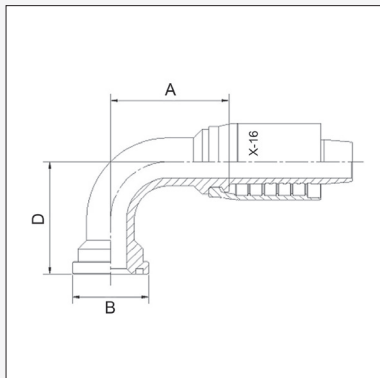


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	T
C629C-1212X	3/4"	12	1.5/8"	20	3/4"	12	68.8	41.3	66.3	14.2
C629C-1612X	1"	16	1.7/8"	20	3/4"	12	66	47.6	70	14.2
C629C-1616X	1"	16	1.7/8"	25	1"	16	76.8	47.6	71	14.2
C629C-2016X	1.1/4"	20	2.1/8"	25	1"	16	84.8	54	84.2	14.2
C629C-2020X	1.1/4"	20	2.1/8"	32	1.1/4"	20	104	54	90.2	14.2
C629C-2420X	1.1/2"	24	2.1/2"	32	1.1/4"	20	104	63.5	90.2	14.2
C629C-2424X	1.1/2"	24	2.1/2"	38	1.1/2"	24	129	63.5	109	14.2
C629C-3232X	2"	32	3.1/8"	50	2"	32	162	79.4	136	14.2


CODE 62 SAE FLANGE

JAPANESE FITTINGS

ORIGIN: JAPAN




KC611

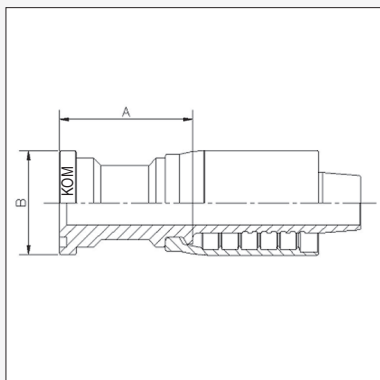KOMATSU STANDARD PRESSURE (210 BAR)
STRAIGHT FLANGE

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB		
KC611-2020X	1.1/4"	20	2"	32	1.1/4"	20	82.9	50.8		
KC611-2424X	1.1/2"	24	2.3/8"	38	1.1/2"	24	93.5	60.3		
KC611-3232X	2"	32	2.13/16"	50	2"	32	128.7	71.4		

KOM identifier can vary between flange head and stem. Flange heads incorporate metric O-Ring dimensions
See page 28


KC614

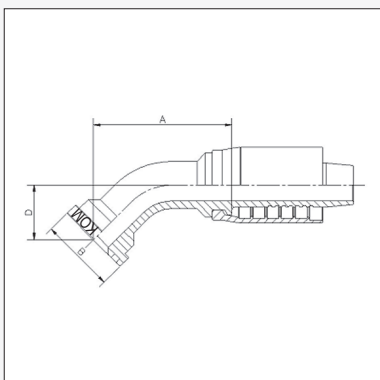KOMATSU STANDARD PRESSURE (210 BAR)
45° ELBOW FLANGE

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	
KC614-2020X	1.1/4"	20	2"	32	1.1/4"	20	115.9	50.8	32	
KC614-2424X	1.1/2"	24	2.3/8"	38	1.1/2"	24	131.5	60.3	38	
KC614-3232X	2"	32	2.13/16"	50	2"	32	188.2	71.4	54	

KOM identifier can vary between flange head and stem. Flange heads incorporate metric O-Ring dimensions
See page 28

KC619

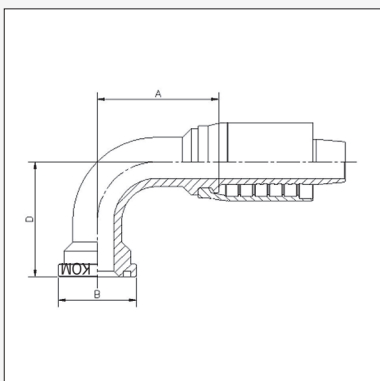KOMATSU STANDARD PRESSURE (210 BAR)
90° ELBOW FLANGE

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	
KC619-2020X	1.1/4"	20	2"	32	1.1/4"	20	102.9	50.8	80	
KC619-2424X	1.1/2"	24	2.3/8"	38	1.1/2"	24	132	60.3	110	
KC619-3232X	2"	32	2.13/16"	50	2"	32	164.7	71.4	140	

KOM identifier can vary between flange head and stem. Flange heads incorporate metric O-Ring dimensions
See page 28

BSP FITTINGS


ORIGIN: GREAT BRITAIN



H / HLZ SERIES

BF1

BSPF FEMALE STRAIGHT

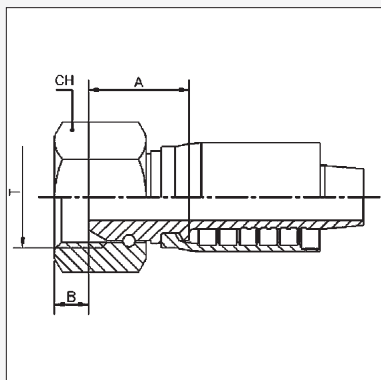


Product Code	BSPF Thread		Nominal ID			Dimensions mm			
	T	Size	Dash	Inch	DN	A	B	CH	
BF1-2020H	1.1/4" - 11	20	32	1.1/4"	20	37.8	10	50	
BF1-2424H	1.1/2" - 11	24	38	1.1/2"	24	38.3	12	55	
BF1-3232H	2" - 11	32	50	2"	32	40.6	16	70	

BSP FITTINGS

BF4

BSPF FEMALE 45° ELBOW

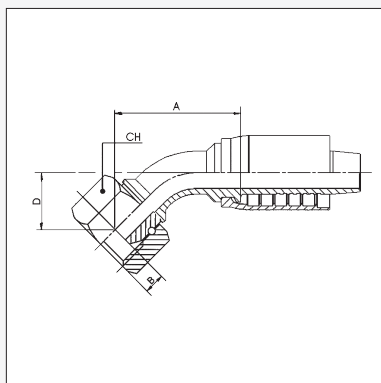

Product Code	BSPF Thread		Nominal ID			Dimensions mm			
	T	Size	Dash	Inch	DN	A	B	CH	D
BF4-2020H	1.1/4" - 11	20	32	1.1/4"	20	106.4	10	50	37.7
BF4-2424H	1.1/2" - 11	24	38	1.1/2"	24	162	12	55	51
BF4-3232H	2" - 11	32	50	2"	32	197	16	70	65.5


BSP FITTINGS

ORIGIN: GREAT BRITAIN



BF9


BSPP FEMALE 90° ELBOW

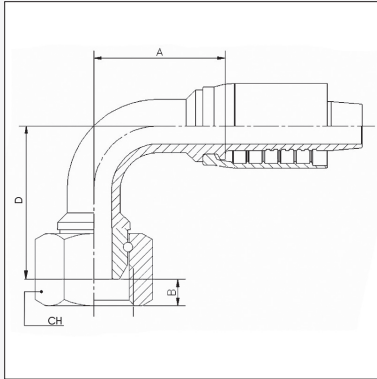

Product Code	BSPP Thread		Nominal ID			Dimensions mm			
	T	Size	Dash	Inch	DN	A	B	CH	D
BF9-2020H	1.1/4" - 11	20	32	1.1/4"	20	91.5	10	50	83
BF9-2424H	1.1/2" - 11	24	38	1.1/2"	24	132	12	55	108
BF9-3232H	2" - 11	32	50	2"	32	157	16	70	140

BTM1

BSPT MALE STRAIGHT

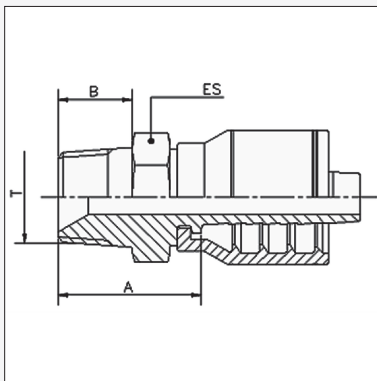

Product Code	BSPT Thread		Nominal ID			Dimensions mm			
	T	Size	Dash	Inch	DN	A	B	ES	
BTM1-2020H	1.1/4" - 11	20	32	1.1/4"	20	52.9	25	46	
BTM1-2424H	1.1/2" - 11	24	38	1.1/2"	24	53.5	25	50	
BTM1-3232H	2" - 11	32	50	2"	32	63.7	28	65	

NPT FITTINGS


ORIGIN: NORTH AMERICA



H / HLZ SERIES

NM1

NPT MALE STRAIGHT

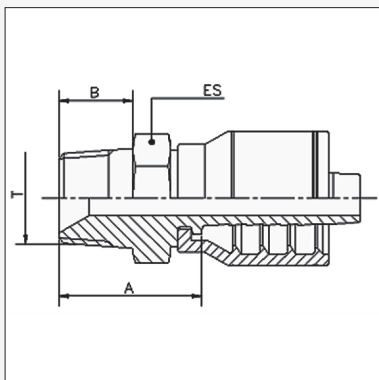


Product Code	NPT Thread		Nominal ID			Dimensions mm			
	T	Size	Dash	Inch	DN	A	B	ES	
NM1-2020H	1.1/4" - 11½	20	32	1.1/4"	20	62.9	24.5	46	
NM1-2424H	1.1/2" - 11½	24	38	1.1/2"	24	61.5	25.5	50	
NM1-3232H	2" - 11½	32	50	2"	32	79.7	26	65	

* Stainless Steel Version add SS to the part number, Eg NM1SS-2020H

NM1

NPT MALE STRAIGHT

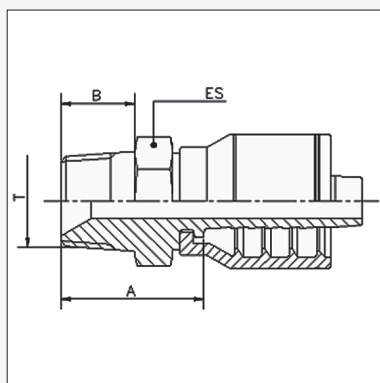


Product Code	NPT Thread		Nominal ID			Dimensions mm			
	T	Size	Dash	Inch	DN	A	B	ES	
NM1-2020H	1.1/4" - 11½	20	32	1.1/4"	20	62.9	24.5	46	
NM1-2424H	1.1/2" - 11½	24	38	1.1/2"	24	61.5	25.5	50	
NM1-3232H	2" - 11½	32	50	2"	32	79.7	26	65	

* Stainless Steel Version add SS to the part number, Eg NM1SS-2020H

HJ9

HOSE JOINER 90°

CRIMP STYLE

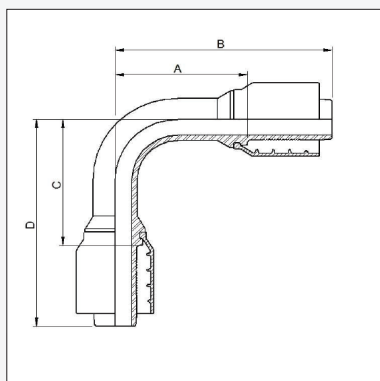

"Product Code"	Hose Bore			Dimensions mm			
	DN	Inch	Size	A	B	C	D
HJ9-2020H	31	1.1/4"	20	100.5	166.5	100.5	166.5

NPT FITTINGS


JIC FITTINGS

ORIGIN: NORTH AMERICA



JF1

JIC FEMALE STRAIGHT

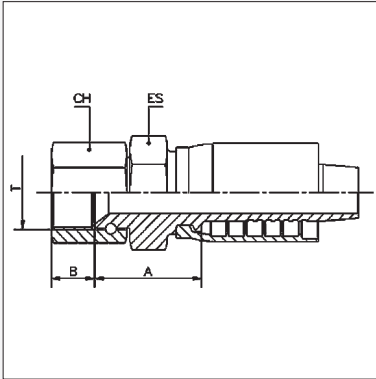


Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	ES
JF1-2620H †	1.5/8" - 12	26	20	32	1.1/4"	20	51.5	16	50	41
JF1-3024H †	1.7/8" - 12	30	24	38	1.1/2"	24	54.4	18.5	55	50
JF1-4032H †	2.1/2" - 12	40	32	50	2"	32	77.7	24	75	65

† Thrust wired nut

* Stainless Steel Version add SS to the part number, Eg JF1SS-2620H

JF4

JIC FEMALE 45° ELBOW

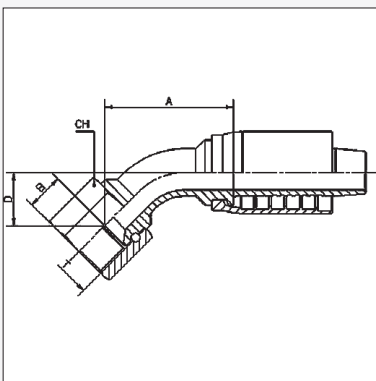


Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
JF4-2620H †	1.5/8" - 12	26	20	32	1.1/4"	20	99.4	16	36.3	50
JF4-3024H †	1.7/8" - 12	30	24	38	1.1/2"	24	162.5	18.5	50	55

† Thrust wired nut

JIC FITTINGS


ORIGIN: NORTH AMERICA

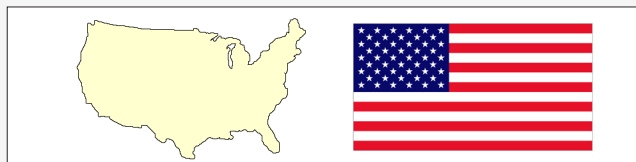

H / HLZ SERIES

JF9

JIC FEMALE 90° ELBOW

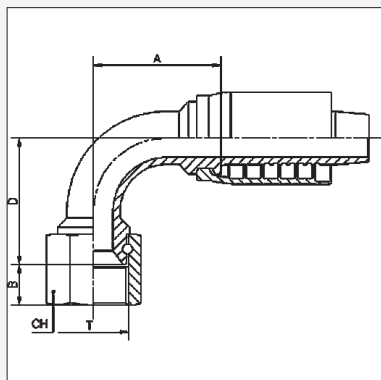


Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
JF9-2620H †	1.5/8" - 12	26	20	32	1.1/4"	20	84.4	16	77	50
JF9-3024H †	1.7/8" - 12	30	24	38	1.1/2"	24	128.5	18.5	105	55
JF9-4032H †	2 1/2" - 12	40	32	50	2"	32	157	24	140	75

† Thrust wired nut

JIC FITTINGS

JM1

JIC MALE STRAIGHT

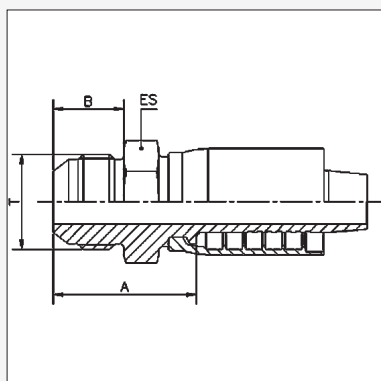

Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	ES	
JM1-2620H	1.5/8" - 12	26	20	32	1.1/4"	20	62.7	24.3	46	
JM1-3024H	1.7/8" - 12	30	24	38	1.1/2"	24	63.5	27.5	50	
JM1-4032H	2 1/2" - 12	40	32	50	2"	32	87.6	33.9	65	


ORFS FITTINGS

ORIGIN: NORTH AMERICA



OF1


O-RING FACE SEAL FEMALE STRAIGHT

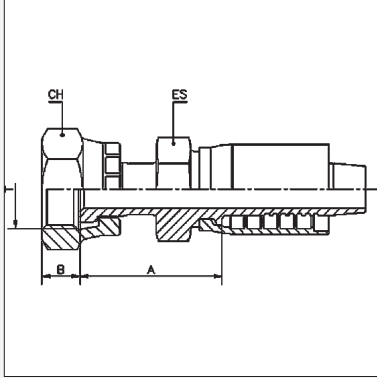

Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	ES
OF1-2020H	1.11/16" - 12	20	20	32	1.1/4"	20	55.9	14.8	50	41
OF1-2424H	2" - 12	24	24	38	1.1/2"	24	58.7	14.8	60	50

OF4


O-RING FACE SEAL FEMALE 45° ELBOW

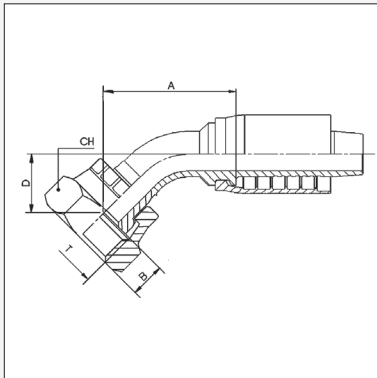

Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	D
OF4-2020H	1.11/16" - 12	20	20	32	1.1/4"	20	99.4	14.8	50	36.3

OF9

O-RING FACE SEAL FEMALE 90° ELBOW

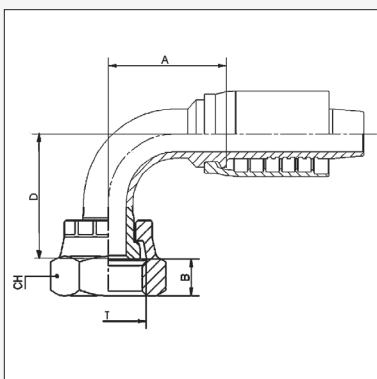

Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	D
OF9-2020H	1.11/16" - 12	20	20	32	1.1/4"	20	84.4	14.8	50	77
OF9-2424H	2" - 12	24	24	38	1.1/2"	24	115	14.8	60	102

METRIC FITTINGS


ORIGIN: GERMANY



H / HLZ SERIES

DSF1

DKS (HEAVY) METRIC FEMALE
STRAIGHT

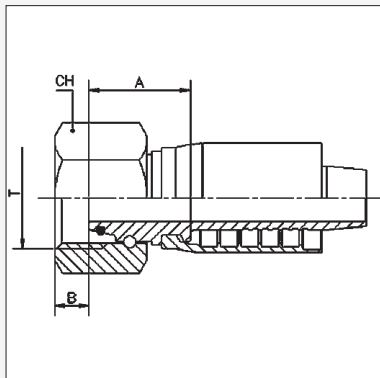


Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	
DSF1-5220H	M52 x 2	52	38 S	32	1.1/4"	20	48.9	6.5	60	
DSF1-5224H	M52 x 2	52	38 S	38	1.1/2"	24	43	6.5	60	

* Stainless Steel Version add SS to the part number, Eg DSF1SS-5220H

METRIC FITTINGS

DSM1

DKS (HEAVY) METRIC MALE
STRAIGHT

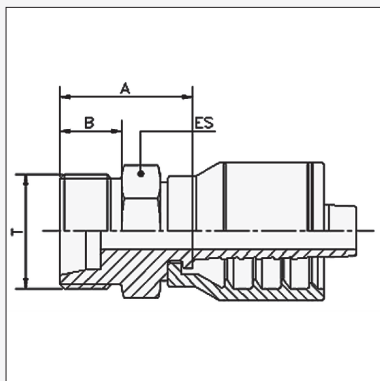


Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	ES	
DSM1-5220H	M52 x 2	52	38 S	32	1.1/4"	20	49.9	22	55	

METRIC FITTINGS

ORIGIN: GERMANY




DSF4

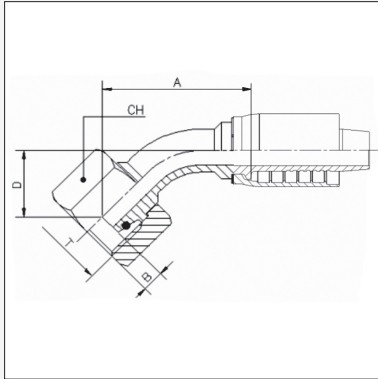DKS (HEAVY) METRIC FEMALE
45° ELBOW

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
DSF4-5220H	M52 x 2	52	38 S	32	1.1/4"	20	123.3	6.5	45.6	60

DSF9

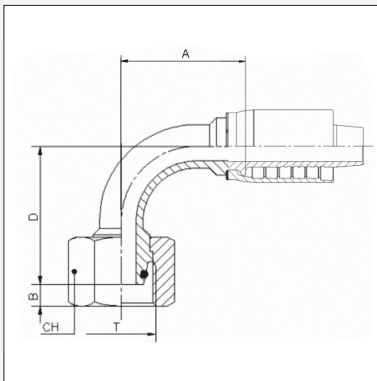DKS (HEAVY) METRIC FEMALE
90° ELBOW

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
DSF9-5220H	M52 x 2	52	38 S	32	1.1/4"	20	95.6	6.5	104	60

SAE FLANGES

ORIGIN: NORTH AMERICA




H / HLZ SERIES

CODE 61 SAE FLANGE

C611


3000 PSI CODE 61
STRAIGHT FLANGE

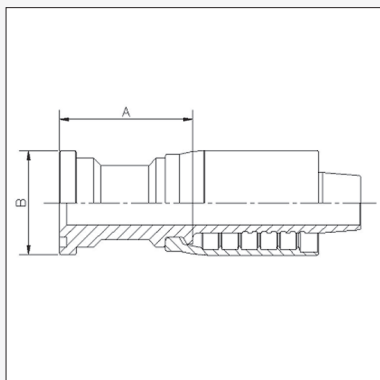

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB		
C611-2020H	1.1/4"	20	2"	32	1.1/4"	20	51.4	50.8		
C611-2420H	1.1/2"	24	2.3/8"	32	1.1/4"	20	61.4	60.3		
C611-2424H	1.1/2"	24	2.3/8"	38	1.1/2"	24	62	60.3		
C611-3224H	2"	32	2.13/16"	38	1.1/2"	24	77	71.4		
C611-3232H	2"	32	2.13/16"	50	2"	32	95.7	71.4		

C612 / 613


3000 PSI CODE 61
22° & 30° ELBOW FLANGE

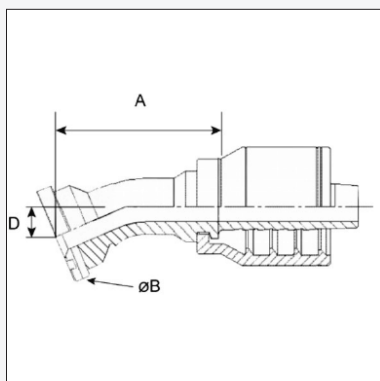

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	
22° ELBOW FLANGE										
C612-2424H	1.1/2"	24	2.3/8"	38	1.1/2"	24	140	60.3	20.1	
33° ELBOW FLANGE										
C613-2424H	1.1/2"	24	2.3/8"	38	1.1/2"	24	147.5	60.3	28.4	

C614

3000 PSI CODE 61
45° ELBOW FLANGE

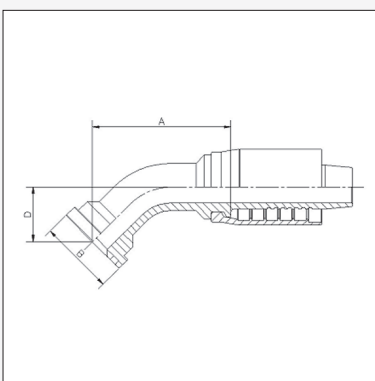

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	
C614-1620H	1"	16	1.3/4"	32	1.1/4"	20	115.5	44.5	43.5	
C614-2020H	1.1/4"	20	2"	32	1.1/4"	20	89	50.8	31.1	
C614-2420H	1.1/2"	24	2.3/8"	32	1.1/4"	20	91.8	60.3	31	
C614-2424H	1.1/2"	24	2.3/8"	38	1.1/2"	24	152	60.3	47	
C614-3224H	2"	32	2.13/16"	38	1.1/2"	24	133	71.4	47	
C614-3232H	2"	32	2.13/16"	50	2"	32	150	71.4	53	



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

SAE FLANGES


ORIGIN: NORTH AMERICA



C619

3000 PSI CODE 61

90° ELBOW FLANGE

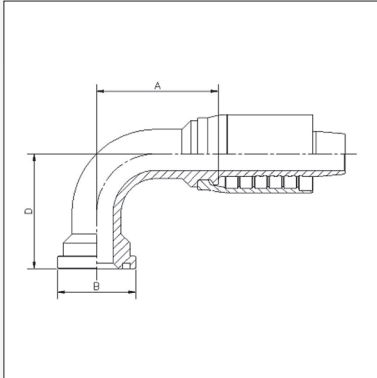


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	
C619-2020H	1.1/4"	20	2"	32	1.1/4"	20	87	50.8	69	
C619-2420H	1.1/2"	24	2.3/8"	32	1.1/4"	20	108	60.3	90	
C619-2424H	1.1/2"	24	2.3/8"	38	1.1/2"	24	132	60.3	103.5	
C619-3224H	2"	32	2.13/16"	38	1.1/2"	24	116	71.4	104	
C619-3232H	2"	32	2.13/16"	50	2"	32	155	71.4	123	

C621

6000 PSI CODE 62

STRAIGHT FLANGE

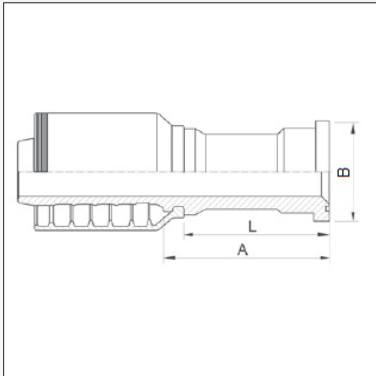


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	L	
C621-1620H	1"	16	1.7/8"	32	1.1/4"	20	68	47.6		
C621-2020H	1.1/4"	20	2.1/8"	32	1.1/4"	20	76.9	54		
C621-2024H	1.1/4"	20	2.1/8"	38	1.1/2"	24	72.5	54		
C621-2420H	1.1/2"	24	2.1/2"	32	1.1/4"	20	81.4	63.5		
C621-2424H	1.1/2"	24	2.1/2"	38	1.1/2"	24	82	63.5		
C621-3224H	2"	32	3.1/8"	38	1.1/2"	24	110.5	79.4		
C621-3232H	2"	32	3.1/8"	50	2"	32	115.7	79.4		
C621-3232HLZ-110	2"	32	3.1/8"	50	2"	32	125.3	79.4	110	

*Stainless Steel Version add SS to the part number Eg C621SS-2020H

C621C

6000 PSI SUPERCAT

STRAIGHT SUPERCAT FLANGE

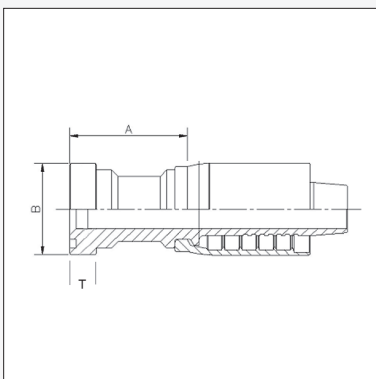


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	
C621C-2020H	1.1/4"	20	2.1/8"	32	1.1/4"	20	76	54	14.2	
C621C-2420H	1.1/2"	24	2.1/2"	32	1.1/4"	20	82.4	63.5	14.2	
C621C-2424H	1.1/2"	24	2.1/2"	38	1.1/2"	24	84	63.5	14.2	
C621C-3224H	2"	32	3.1/8"	38	1.1/2"	24	110.5	79.4	14.2	
C621C-3232H	2"	32	3.1/8"	50	2"	32	115.7	79.4	14.2	



C622C

6000 PSI SUPERCAT

22½° ELBOW SUPERCAT FLANGE

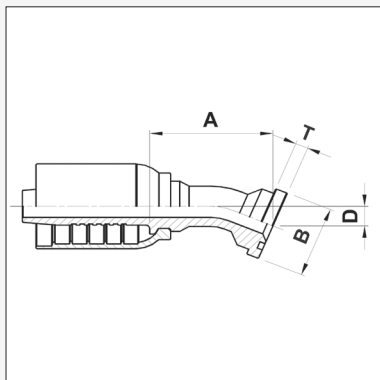


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	D
C622C-2020H	1.1/4"	20	2.1/8"	32	1.1/4"	20	131.5	54	14.2	21
C622C-2420H	1.1/2"	24	2.1/2"	32	1.1/4"	20	133	63.5	14.2	22.5

C623 / C623C

6000 PSI CODE 62 / SUPERCAT

30° ELBOW FLANGE

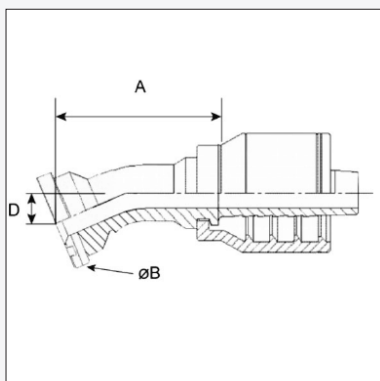


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	B	D	T
C623-2020H	1.1/4"	20	2.1/8"	32	1.1/4"	20	124.5	54	27	10.3
C623C-2020H	1.1/4"	20	2.1/8"	32	1.1/4"	20	128.5	54	29	14.2
C623C-2420H	1.1/2"	24	2.1/2"	32	1.1/4"	20	129.5	63.5	31	14.2
C623C-2424H	1.1/2"	24	2.1/2"	38	1.1/2"	24	147	63.5	29.5	14.2

C624

6000 PSI CODE 62

45° ELBOW FLANGE

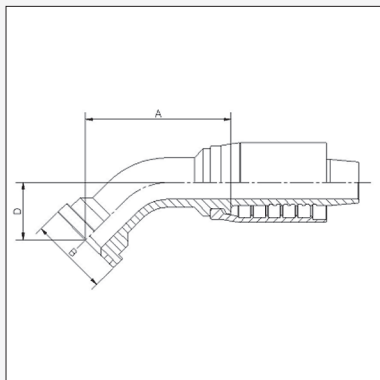

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	
C624-1620H	1"	16	1.7/8"	32	1.1/4"	20	115.5	47.6	43.5	
C624-2020H	1.1/4"	20	2.1/8"	32	1.1/4"	20	115.5	54	43.5	
C624-2420H	1.1/2"	24	2.1/2"	32	1.1/4"	20	117.5	63.5	48	
C624-2424H	1.1/2"	24	2.1/2"	38	1.1/2"	24	152	63.5	47	
C624-3224H	2"	32	3.1/8"	38	1.1/2"	24	167	79.4	57	
C624-3232H	2"	32	3.1/8"	50	2"	32	174	79.4	61	
C624-3232HLZ-061	2"	32	3.1/8"	50	2"	32	176.5	79.4	61	

SAE FLANGES


ORIGIN: NORTH AMERICA



C624C

6000 PSI SUPERCAT

45° ELBOW SUPERCAT FLANGE

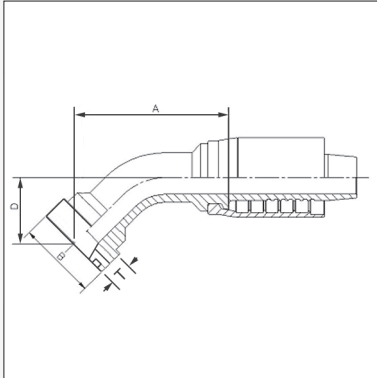


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	T
C624C-2020H	1.1/4"	20	2.1/8"	32	1.1/4"	20	118.5	54	46.5	14.2
C624C-2420H	1.1/2"	24	2.1/2"	32	1.1/4"	20	118.5	63.5	46.5	14.2
C624C-2424H	1.1/2"	24	2.1/2"	38	1.1/2"	24	153.5	63.5	48.5	14.2
C624C-3232H	2"	32	3.1/8"	50	2"	32	182.5	79.4	61.5	14.2

C626

6000 PSI CODE 62

60° ELBOW FLANGE

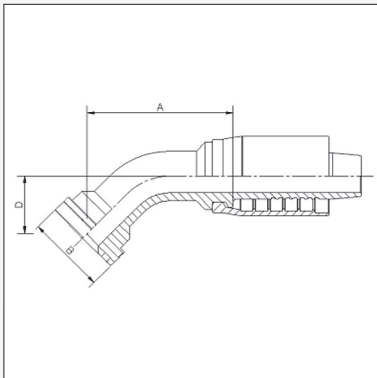


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	
C626-2020H	1.1/4"	20	2.1/8"	32	1.1/4"	20	113	54	55	
C626-2424H	1.1/2"	24	2.1/2"	38	1.1/2"	24	175.5	63.5	69.5	

C626C

6000 PSI SUPERCAT

60° ELBOW SUPERCAT FLANGE

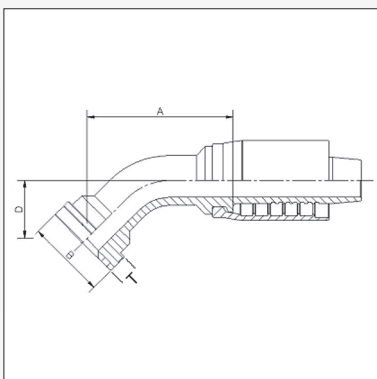


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	T
C626C-2020H	1.1/4"	20	2.1/8"	32	1.1/4"	20	132	54	59	14.2
C626C-2420H	1.1/2"	24	2.1/2"	32	1.1/4"	20	137	63.5	65.5	14.2
C626C-2424H	1.1/2"	24	2.1/2"	38	1.1/2"	24	153.5	63.5	71.5	14.2



C627C

6000 PSI CODE 62

67.5° ELBOW SUPERCAT FLANGE

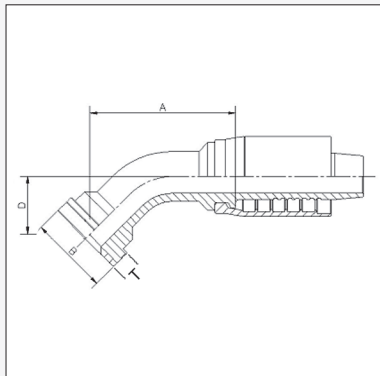


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	T
C627C-2020H	1.1/4"	20	2.1/8"	32	1.1/4"	20	115	54	67	14.2
C627C-2420H	1.1/2"	24	2.1/2"	32	1.1/4"	20	128	63.5	76.1	14.2

C629

6000 PSI CODE 62

90° ELBOW FLANGE

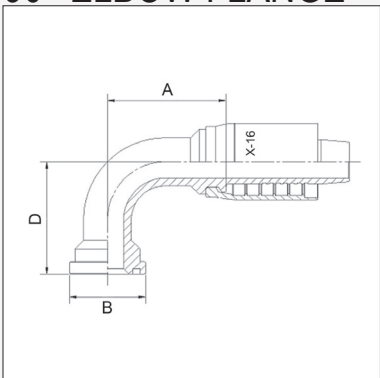


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	T
C629-1620H	1"	16	1.7/8"	32	1.1/4"	20	109.5	47.6	87	
C629-2020H	1.1/4"	20	2.1/8"	32	1.1/4"	20	104	54	86	
C629-2020H-130	1.1/4"	20	2.1/8"	32	1.1/4"	20	104	54	130	
C629-2020H-170	1.1/4"	20	2.1/8"	32	1.1/4"	20	104	54	170	
C629-2420H	1.1/2"	24	2.1/2"	32	1.1/4"	20	104.2	63.5	98	
C629-2424H	1.1/2"	24	2.1/2"	38	1.1/2"	24	129	63.5	107	
C629-3224H	2"	32	3.1/8"	38	1.1/2"	24	129	79.4	119.5	
C629-3232H	2"	32	3.1/8"	50	2"	32	162	79.4	134	
C629-3232HLZ-155	2"	32	3.1/8"	50	2"	32	151.9	79.4	155	

* Stainless Steel Version add SS to the part number Eg C629SS-2020H

C629C

6000 PSI SUPERCAT

90° ELBOW SUPERCAT FLANGE

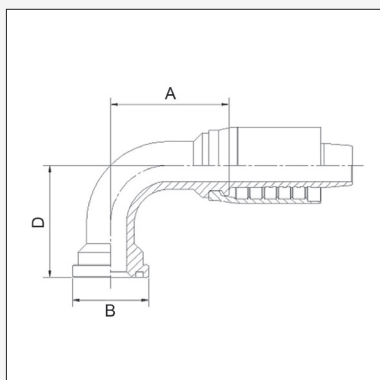

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	T
C629C-2020H	1.1/4"	20	2.1/8"	32	1.1/4"	20	104	54	90.2	14.2
C629C-2420H	1.1/2"	24	2.1/2"	32	1.1/4"	20	104	63.5	90.2	14.2
C629C-2424H	1.1/2"	24	2.1/2"	38	1.1/2"	24	129	63.5	109	14.2
C629C-3232H	2"	32	3.1/8"	50	2"	32	162	79.4	136	14.2
C629C-2420H-135	1.1/2"	24	2.3/8"	31	1.1/4"	20	104.2	63.5	135	14.5
C629C-2020H-150	1.1/4"	20	2"	31	1.1/4"	20	104	54	150	14.5


SAE FLANGES

ORIGIN: NORTH AMERICA



C621TF


6000 PSI CODE 62 TAPERED STRAIGHT FLANGE

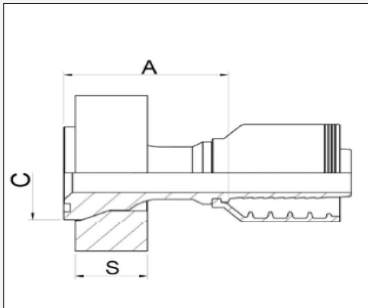

"Product Code"	Flange			Hose Bore		Dimensions (mm)		
	Bore	Size	DN	Inch	Size	A	C	S
C621TF-2020H	1.1/4"	20	32	1.1/4"	20	93	54	35
C621TF-2424H	1.1/2"	24	38	1.1/2"	24	114	63.5	41.6
C621TF-3224H	2"	32	38	1.1/2"	24	130.5	79.4	49
C621TF-3232HLZ	2"	32	50	2"	32	134.8	79.4	49

C624TF


6000 PSI CODE 62 TAPERED 45° FLANGE

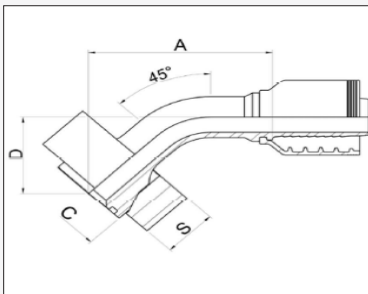

"Product Code"	Flange			Hose Bore		Dimensions (mm)			
	Bore	Size	DN	Inch	Size	A	D	C	S
C624TF-2020H-060	1.1/4"	20	32	1.1/4"	20	127	60	54	35
C624TF-2424H-080	1.1/2"	24	38	1.1/2"	24	166	80	63.5	41.6
C624TF-3224H-095	2"	32	38	1.1/2"	24	184	95	79.4	49
C624TF-3232HLZ-090	2"	32	50	2"	32	195.4	90	79.4	49

C629TF


6000 PSI CODE 62 TAPERED 90° FLANGE

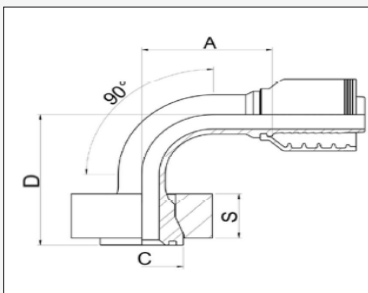

"Product Code"	Flange		Hose Bore			Dimensions (mm)			
	Bore	Size	DN	Inch	Size	A	D	C	S
C629TF-2020H-120	1.1/4"	20	32	1.1/4"	20	98	120	54	35
C629TF-2424H-140	1.1/2"	24	38	1.1/2"	24	122.5	140	63.5	41.6
C629TF-3224H-160	2"	32	38	1.1/2"	24	131	160	79.4	49
C629TF-3232HLZ-180	2"	32	50	2"	32	160.5	180	79.4	49

AK-HLZ


ANTI-KINK HOSE GUARD SUIT HLZ FITTINGS

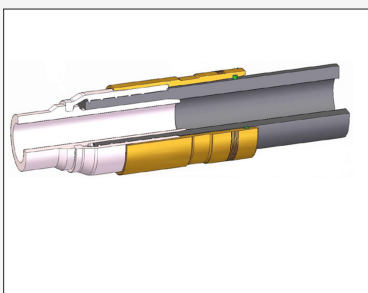

Product Code	Description
AK-HLZ-32	Anti-kink hose guard to suit HLZ fittings Length = 145mm
AK-OR-HLZ-32	Replacement o-ring for AK-HLZ-32 NBR 70

JAPANESE FITTINGS

ORIGIN: JAPAN




H / HLZ SERIES

JAPANESE FITTINGS

KC611

KOMATSU STANDARD PRESSURE (210 BAR)
STRAIGHT FLANGE

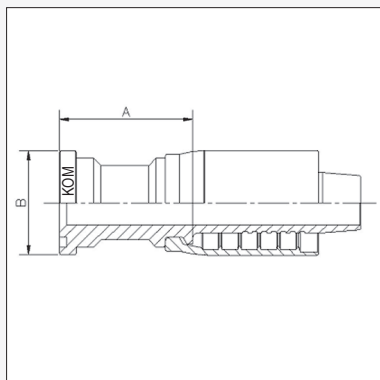


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB		
KC611-2020H	1.1/4"	20	2"	32	1.1/4"	20	82.9	50.8		
KC611-2424H	1.1/2"	24	2.3/8"	38	1.1/2"	24	93.5	60.3		
KC611-3232H	2"	32	2.13/16"	50	2"	32	128.7	71.4		

KOM identifier can vary between flange head and stem. Flange heads incorporate metric O-Ring dimensions
See page 28

KC614

KOMATSU STANDARD PRESSURE (210 BAR)
45° ELBOW FLANGE

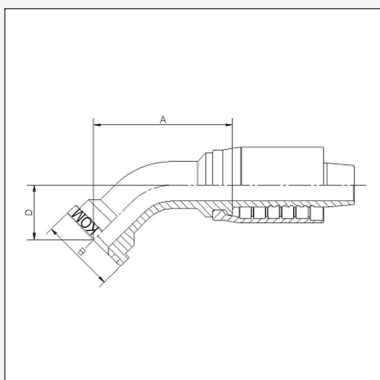


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	
KC614-2020H	1.1/4"	20	2"	32	1.1/4"	20	89.0	50.8	31	
KC614-2424H	1.1/2"	24	2.3/8"	38	1.1/2"	24	131.5	60.3	37	
KC614-3232H	2"	32	2.13/16"	50	2"	32	188.2	71.4	52.5	

KOM identifier can vary between flange head and stem. Flange heads incorporate metric O-Ring dimensions
See page 28

KC619

KOMATSU STANDARD PRESSURE (210 BAR)
90° ELBOW FLANGE

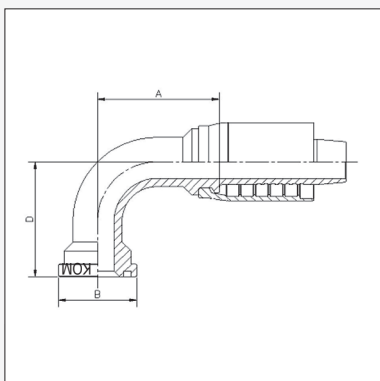

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D	
KC619-2020H	1.1/4"	20	2"	32	1.1/4"	20	102.9	50.8	80	
KC619-2424H	1.1/2"	24	2.3/8"	38	1.1/2"	24	132	60.3	110	
KC619-3232H	2"	32	2.13/16"	50	2"	32	164.7	71.4	140	

KOM identifier can vary between flange head and stem. Flange heads incorporate metric O-Ring dimensions
See page 28



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

71
C

LeTourneau ®


ORIGIN: USA



* Note AZLT Split Clamps To Be Used In Conjunction With These Fittings. Refer To Catalogue Section D

C6LT1


LETOURNEAU STRAIGHT FLANGE (5000 PSI)

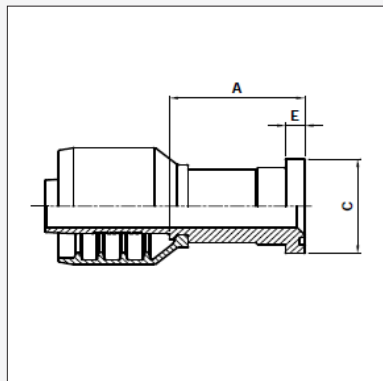

Product Code	Hose Bore			Dimensions (mm)			
	DN	Inch	Size	Flange	A	C	E
C6LT1-2424H	38	1.1/2"	24	1.1/2"	73	60.35	11

C6LT4


LETOURNEAU 45° FLANGE (5000 PSI)

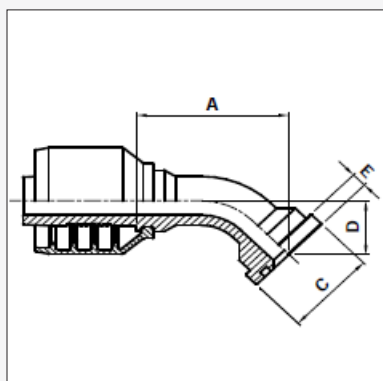

Product Code	Hose Bore			Dimensions (mm)				
	DN	Inch	Size	Flange	A	C	D	E
C6LT4-2424H-046	38	1.1/2"	24	1.1/2"	154	60.35	49	11

C6LT9

LETOURNEAU 90° FLANGE (5000 PSI)

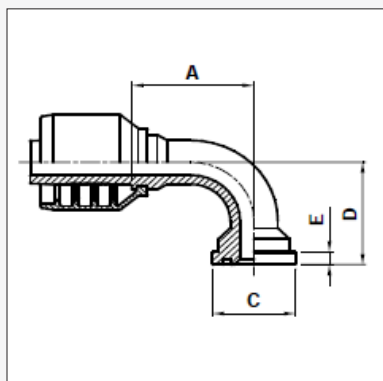


Product Code	Hose Bore			Dimensions (mm)				
	DN	Inch	Size	Flange	A	C	D	E
C6LT9-2424H-104	38	1.1/2"	24	1.1/2"	132	60.35	104	11

SAE FLANGES


ORIGIN: NORTH AMERICA

SF FERRULE

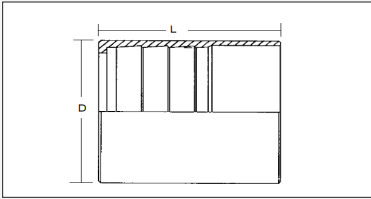


C611

CODE 61 STRAIGHT FLANGE

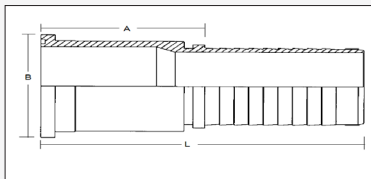


C613

CODE 61 30° FLANGE

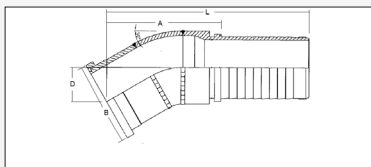


C614

CODE 61 45° FLANGE

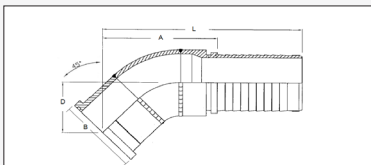



C616

CODE 61 60° FLANGE

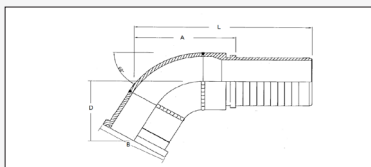

C619

CODE 61 90° FLANGE

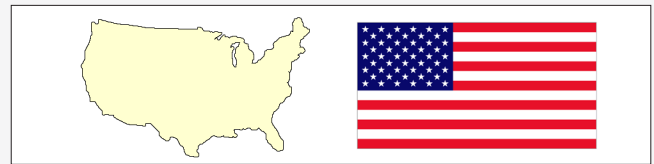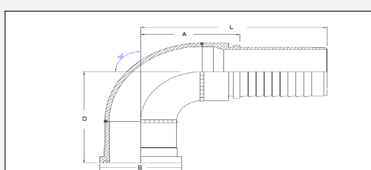

Product Code	Hose Bore			Dimensions (mm)		
	DN	Inch	Size	Max. hose O.D	L	D
SF-48-092	76	3"	48	92	106	103.1
SF-56-108	90	3.1/2"	56	108	116	121

Product Code	Flange		Hose Bore			Dimensions (mm)		
	Bore	Size	DN	Inch	Size	A	B	L
C611-4848SF	3"	48	76	3"	48	111.1	101.6	219.1
C611-5656SF	3.1/2"	56	90	3.1/2"	56	110.3	114.3	223

"Product Code"	Flange		Hose Bore			Dimensions (mm)			
	Bore	Size	DN	Inch	Size	A	B	D	L
C613-4848SF-042	3"	48	76	3"	48	141	101.6	42	248.5

"Product Code"	Flange		Hose Bore			Dimensions (mm)			
	Bore	Size	DN	Inch	Size	A	B	D	L
C614-4848SF-068	3"	48	76	3"	48	146.1	101.6	67.5	254.1
C614-5656SF-070	3.1/2"	56	90	3.1/2"	56	146.8	114.3	70.3	258


"Product Code"	Flange		Hose Bore			Dimensions (mm)			
	Bore	Size	DN	Inch	Size	A	B	D	L
C616-4848SF-093	3"	48	76	3"	48	144.9	101.6	93.4	252.9

"Product Code"	Flange		Hose Bore			Dimensions (mm)			
	Bore	Size	DN	Inch	Size	A	B	D	L
C619-4848SF-140	3"	48	76	3"	48	123.1	101.6	140	231.1
C619-5648SF-162	3.1/2"	56	76	3"	48	123	114.3	162	231
C619-5656SF-143	3.1/2"	56	90	3.1/2"	56	120	114.3	143	232
C619-5656SF-155	3.1/2"	56	90	3.1/2"	56	120	114.3	155	232.2

MINING FITTINGS AND ADAPTORS

REFER TO SECTION U


Standard Stapelok

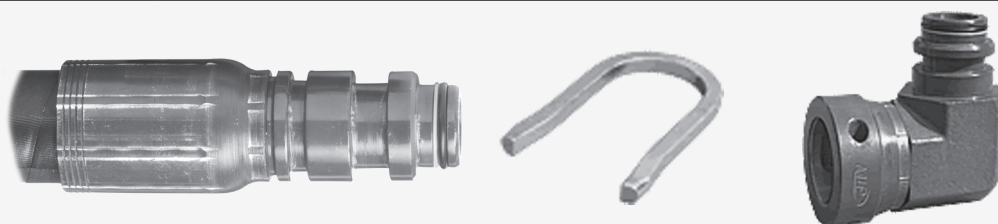

Super Stapelok



Clipline (Large Bore)

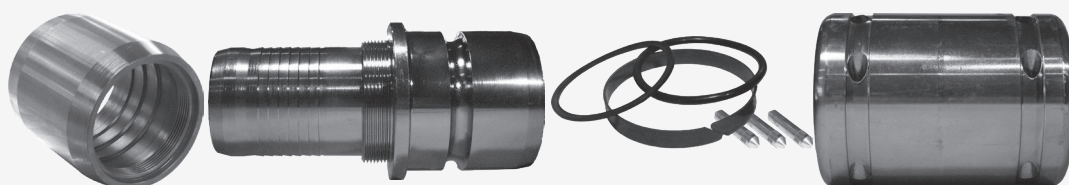


Flushfit



Slimline




SKV / SSKV

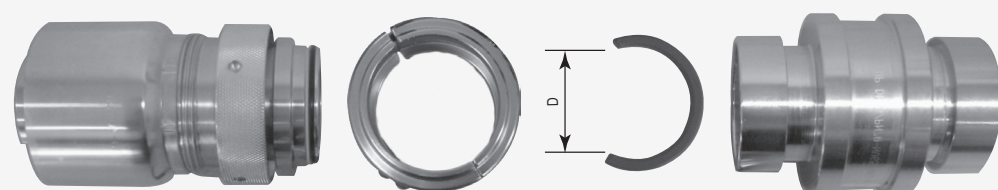



BF1


BSPP FEMALE STRAIGHT

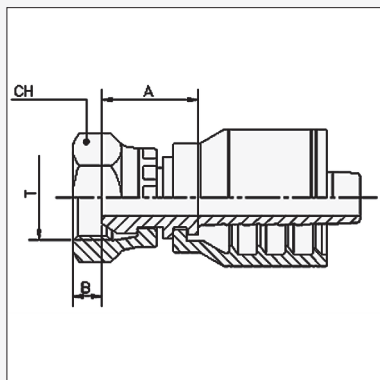

Product Code	BSPP Thread			Nominal ID			Dimensions mm		
	T	Size	Pipe	DN	Inch	Size	A	B	CH
BF1-0202T	1/8" - 28	02	1/8"	3	1/8"	02	14.3	5.5	14
BF1-0402T	1/4" - 19	4	1/4"	3	1/8"	2	16.5	4.2	19
BF1-0203T	1/8" - 28	02	1/8"	5	3/16"	03	14.3	5.5	14
BF1-0204T	1/8" - 28	02	1/8"	6	1/4"	04	21.5	5.5	14
BF1-0403T	1/4" - 19	04	1/4"	5	3/16"	03		4.2	19
BF1-0404T	1/4" - 19	04	1/4"	6	1/4"	04	17.5	4.2	19
BF1-0604T	3/8" - 19	06	3/8"	6	1/4"	04	18.5	6	22
BF1-0405T	1/4" - 19	04	1/4"	8	5/16"	05	17.8	4.2	19
BF1-0605T	3/8" - 19	06	3/8"	8	5/16"	05	18.5	6	22
BF1-0406T	1/4" - 19	04	1/4"	10	1/4"	06	17.8	4.2	19
BF1-0606T	3/8" - 19	06	3/8"	10	3/8"	06	18.5	6	22
BF1-0806T	1/2" - 14	08	1/2"	10	3/8"	06	20.5	6.5	27
BF1-0808T	1/2" - 14	08	1/2"	12	1/2"	08	21	6.5	27
BF1-1010T	5/8" - 14	10	5/8"	16	5/8"	10	18	9.5	27
BF1-1212T	3/4" - 14	12	3/4"	20	3/4"	12	22	8.7	32
BF1-1612T	1" - 11	16	1"	20	3/4"	12	27	10.5	38
BF1-1616T	1" - 11	16	1"	25	1"	16	28	10.5	38

BF4

BSPP FEMALE 45° ELBOW

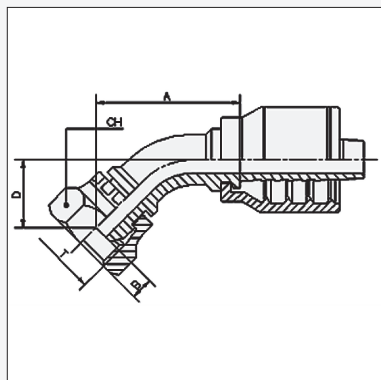

Product Code	BSPP Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	B	CH	D
BF4-0404T	1/4" - 19	04	1/4"	6	1/4"	04	31.5	4.2	19	13
BF4-0606T	3/8" - 19	06	3/8"	10	3/8"	06	39	6	22	15
BF4-0808T	1/2" - 14	08	1/2"	12	1/2"	08	46	6.5	27	18
BF4-1212T	3/4" - 14	12	3/4"	20	3/4"	12	70	8.7	32	28.3
BF4-1616T	1" - 11	16	1"	25	1"	16	83.5	10.5	38	32


BSP

ORIGIN: GREAT BRITAIN



BF9


BSPP FEMALE 90° ELBOW

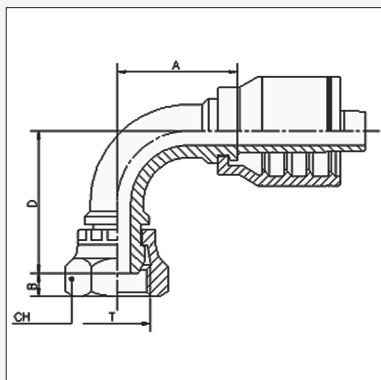

Product Code	BSPP Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	B	CH	D
BF9-0404T	1/4" - 19	04	1/4"	6	1/4"	04	27.5	4.2	19	27
BF9-0604T	3/8" - 19	06	1/4"	6	1/4"	04	27.5	6	22	29.5
BF9-0606T	3/8" - 19	06	3/8"	10	3/8"	06	32.5	6	22	30
BF9-0806T	1/2" - 14	08	3/8"	10	3/8"	06	32.5	6.5	27	32
BF9-0808T	1/2" - 14	08	1/2"	12	1/2"	08	39	6.5	27	36.5
BF9-1010T	5/8" - 14	10	5/8"	16	5/8"	10	46.5	9.5	27	49
BF9-1212T	3/4" - 14	12	3/4"	20	3/4"	12	62.5	8.7	32	58.8
BF9-1616T	1" - 11	16	1"	25	1"	16	71.5	10.5	38	71

BTM1

BSPT MALE STRAIGHT

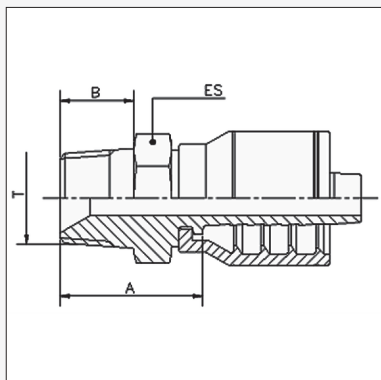

Product Code	BSPT Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	B	ES	
BTM1-0203T	1/8" - 28	02	1/8"	5	3/16"	03	21	9.7	12	
BTM1-0403T	1/4" - 19	04	1/4"	5	3/16"	03	25.3	14	14	
BTM1-0204T	1/8" - 28	02	1/8"	6	1/4"	04	20.2	9.7	12	
BTM1-0404T	1/4" - 19	04	1/4"	6	1/4"	04	26.5	14	14	
BTM1-0605T	3/8" - 19	06	3/8"	8	5/16"	05	29	15	19	
BTM1-0406T	1/4" - 19	04	1/4"	10	3/8"	06	24.5	14	14	
BTM1-0606T	3/8" - 19	06	3/8"	10	3/8"	06	29	15	19	
BTM1-0608T	3/8" - 19	06	3/8"	12	1/2"	08	29	15	19	
BTM1-0808T	1/2" - 14	08	1/2"	12	1/2"	08	32.5	18	22	
BTM1-1212T	3/4" - 14	12	3/4"	20	3/4"	12	42.5	20	27	
BTM1-1616T	1" - 11	16	1"	25	1"	16	46.5	23	36	

NPT


ORIGIN: NORTH AMERICA



T SERIES

NM1


NPT MALE STRAIGHT

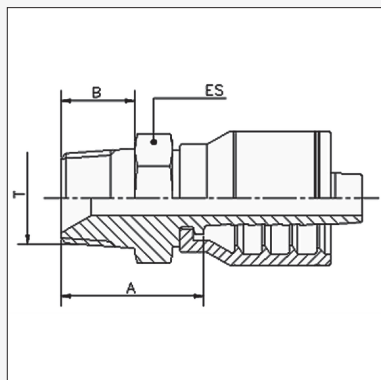

Product Code	NPT Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	B	ES	
NM1-0202T	1/8" - 27	02	1/8"	3	1/8"	02	20.8	9.5	11.5	
NM1-0203T	1/8" - 27	02	1/8"	5	3/16"	03	20.8	9.5	11.1	
NM1-0403T	1/4" - 18	04	1/4"	5	3/16"	03	25.8	14	14	
NM1-0204T	1/8" - 27	02	1/8"	6	1/4"	04	22	9.5	14	
NM1-0404T	1/4" - 18	04	1/4"	6	1/4"	04	26.5	14	14	
NM1-0606T	3/8" - 18	06	3/8"	10	3/8"	06	28	14	19	
NM1-0808T	1/2" - 14	08	1/2"	12	1/2"	08	33.5	19	22	
NM1-0810T	1/2" - 14	08	1/2"	16	5/8"	10	33.5	19	24	
NM1-1212T	3/4" - 14	12	3/4"	20	3/4"	12	41.5	19	27	
NM1-1616T	1" - 11½	16	1"	25	1"	16	47.5	24	36	

NF1

NPSM FEMALE STRAIGHT

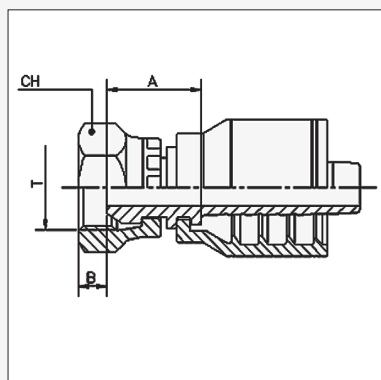

Product Code	BSPP Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	B	CH	
NF1-0404T	1/4" - 18	04	1/4"	6	1/4"	04	17.5	4.2	19	
NF1-0606T	3/8" - 18	06	3/8"	10	3/8"	06	26.5	5.7	22	

NPT FITTINGS


JIC

ORIGIN: NORTH AMERICA



JF1


JIC FEMALE STRAIGHT

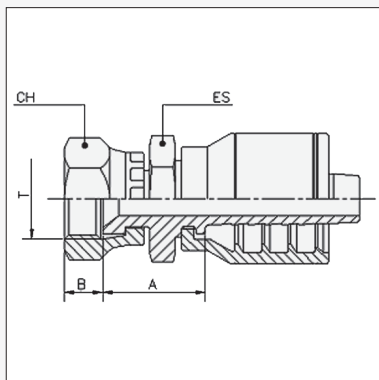

Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	ES
JF1-0602T	3/8" - 24	06	03	3	1/8"	02	20	8.3	14	14
JF1-0702T	7/16" - 20	07	04	3	1/8"	02	19.6	8.5	14	11.11
JF1-0703T	7/16" - 20	07	04	5	3/16"	03	19.6	8.5	14	11.11
JF1-0704T	7/16" - 20	07	04	6	1/4"	04	20.8	8.5	14	14
JF1-0804T	1/2" - 20	08	05	6	1/4"	04	21.5	10.5	17	14
JF1-0904T	9/16" - 18	09	06	6	1/4"	04	23	9.5	19	14
JF1-0805T	1/2" - 20	08	05	8	5/16"	05	15.5	10.5	17	14
JF1-0905T	9/16" - 18	09	06	8	5/16"	05	21	9.5	19	14
JF1-0906T	9/16" - 18	09	06	10	3/8"	06	24	9.5	19	17
JF1-1206T	3/4" - 16	12	08	10	3/8"	06	25.9	10.7	22	19
JF1-1208T	3/4" - 16	12	08	12	1/2"	08	25.4	10.7	22	19
JF1-1408T	7/8" - 14	14	10	12	1/2"	08	29.8	12.7	27	22
JF1-1708T	1.1/16" - 12	17	12	12	1/2"	08	35.5	13.8	32	27
JF1-1410T	7/8" - 14	14	10	16	5/8"	10	29.8	12.7	27	22
JF1-1710T	1.1/16" - 12	17	12	16	5/8"	10	35.5	13.8	32	27
JF1-1712T	1.1/16" - 12	17	12	20	3/4"	12	36	13.8	32	27
JF1-2116T	1.5/16" - 12	21	16	25	1"	16	35	16	38	32

JM1

JIC MALE STRAIGHT

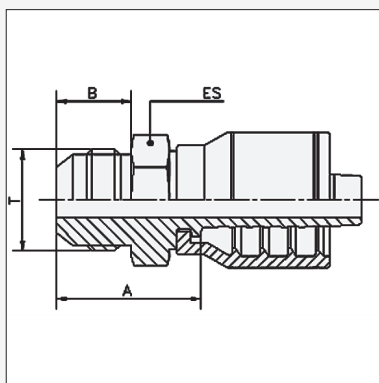


Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	ES	
JM1-0703T	7/16" - 20	07	04	5	3/16"	03	25.3	14	14	
JM1-0704T	7/16" - 20	07	04	6	1/4"	04	26.5	14	14	
JM1-0904T	9/16" - 18	09	06	6	1/4"	04	27.5	14	17	
JM1-0905T	9/16" - 18	09	06	8	5/16"	05	27.5	14	17	
JM1-0906T	9/16" - 18	09	06	10	3/8"	06	27.5	14	17	
JM1-1206T	3/4" - 16	12	08	10	3/8"	06	30.2	16.7	19	
JM1-1208T	3/4" - 16	12	08	12	1/2"	08	30.7	16.7	19	
JM1-1408T	7/8" - 14	14	10	12	1/2"	08	34.9	19.3	24	
JM1-1410T	7/8" - 14	14	10	16	5/8"	10	35.3	19.3	24	
JM1-1712T	1.1/16" - 12	17	12	20	3/4"	12	39.4	21.9	27	



JF4

JIC FEMALE 45° ELBOW

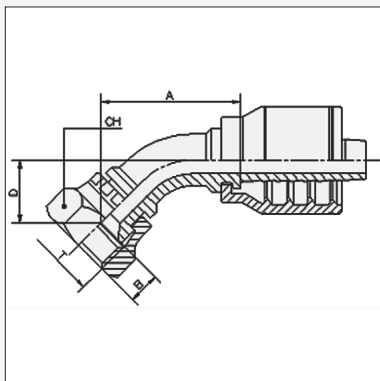


Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	D
JF4-0704T	7/16" - 20	07	04	6	1/4"	04	36	8.5	14	14
JF4-0804T	1/2" - 20	08	05	6	1/4"	04	41.5	10.5	17	15
JF4-0904T	9/16" - 18	09	06	6	1/4"	04	34.5	9.5	19	14.5
JF4-0906T	9/16" - 18	09	06	10	3/8"	06	44.5	9.5	19	11.5
JF4-1206T	3/4" - 16	12	08	10	3/8"	06	44	10.7	22	14.5
JF4-1208T	3/4" - 16	12	08	12	1/2"	08	43.2	10.7	22	13.8
JF4-1408T	7/8" - 14	14	10	12	1/2"	08	55.5	12.5	27	19
JF4-1410T	7/8" - 14	14	10	16	5/8"	10	62.5	12.7	27	24
JF4-1710T †	1.1/16" - 12	17	12	16	5/8"	10	60.5	13.8	32	29
JF4-1712T †	1.1/16" - 12	17	12	20	3/4"	12	70	13.8	32	28.3
JF4-2116T †	1.5/16" - 12	21	16	25	1"	16	83.5	16	38	32

† Pin Nut

JF9

JIC FEMALE 90° ELBOW

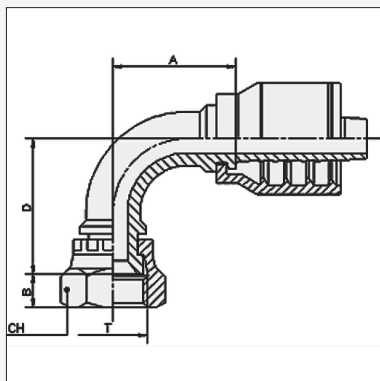

Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	D
JF9-0703T	7/16" - 20	07	04	5	3/16"	03	24	8.5	14	46
JF9-0704T	7/16" - 20	07	04	6	1/4"	04	28.5	8.5	15	26.5
JF9-0804T	1/2" - 20	08	05	6	1/4"	04	29	10.5	17	30
JF9-0904T	9/16" - 18	09	06	6	1/4"	04	27.5	9.5	19	27.5
JF9-0805T	1/2" - 20	08	05	8	5/16"	05	32	10.5	17	33
JF9-0905T	9/16" - 18	09	06	8	5/16"	05	30	9.5	19	22
JF9-0906T	9/16" - 18	09	06	10	3/8"	06	31	9.5	19	22
JF9-1206T	3/4" - 16	12	08	10	3/8"	06	31.5	10.7	22	30
JF9-1208T	3/4" - 16	12	08	12	1/2"	08	41	10.7	22	30
JF9-1408T	7/8" - 14	14	10	12	1/2"	08	42.5	12.5	27	40
JF9-1410T	7/8" - 14	14	10	16	5/8"	10	47.5	12.7	27	49
JF9-1710T †	1.1/16" - 12	17	12	16	5/8"	10	48.5	13.8	32	47.5
JF9-1712T †	1.1/16" - 12	17	12	20	3/4"	12	61.5	13.8	32	58.8
JF9-2116T †	1.5/16" - 12	21	16	25	1"	16	71.5	16	38	71

† Pin Nut


SAE

ORIGIN: NORTH AMERICA



SF1


SAE FEMALE STRAIGHT

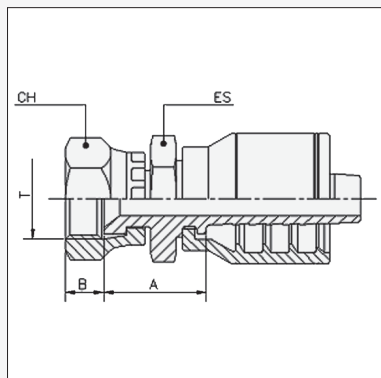

Product Code	SAE Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	ES
SF1-1004T	5/8" - 18	10	06	6	1/4"	04	23.9	10.8	22	19
SF1-1006T	5/8" - 18	10	06	10	3/8"	06	23.9	10.8	22	19
SF1-1712T	1.1/16" - 14	17	12	20	3/4"	12	31.2	14.4	32	27

SF9

SAE FEMALE 90° ELBOW

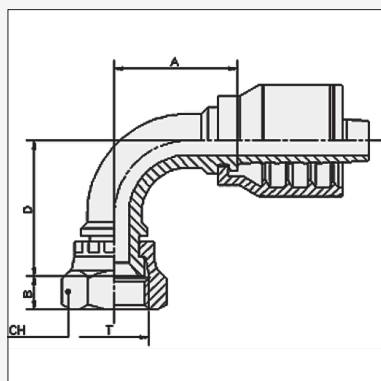

Product Code	SAE Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
SF9-1006T	5/8" - 18	10	06	10	3/8"	06	37	10.8	37	22

ORFS FITTINGS


ORIGIN: NORTH AMERICA



T SERIES

OF1


O-RING FACE SEAL FEMALE STRAIGHT

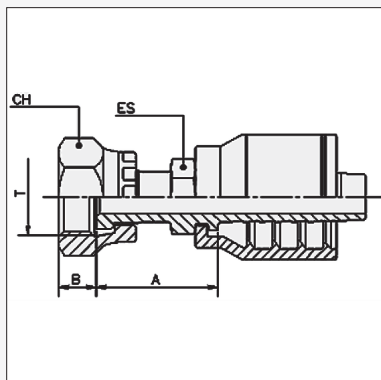

Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	ES
OF1-0402T	9/16"-18	04	04	3	1/8"	02	27.5	8	19	14
OF1-0404T	9/16" - 18	04	04	6	1/4"	04	28	8	19	14
OF1-0604T	11/16" - 16	06	06	6	1/4"	04	31.5	9.5	22	17
OF1-0606T	11/16" - 16	06	06	10	3/8"	06	32	9.5	22	17
OF1-0806T	13/16" - 16	08	08	10	3/8"	06	36.5	11	24	19
OF1-0808T	13/16" - 16	08	08	12	1/2"	08	35	11	24	19
OF1-1008T	1" - 14	10	10	12	1/2"	08	39	13.5	30	24
OF1-1010T	1" - 14	10	10	16	5/8"	10	39.1	13.5	30	24
OF1-1210T	1.3/16"-12	12	12	16	5/8"	10	44	14.5	36	30
OF1-1212T	1.3/16" - 12	12	12	20	3/4"	12	44	15	36	30

OM1

O-RING FACE SEAL MALE STRAIGHT

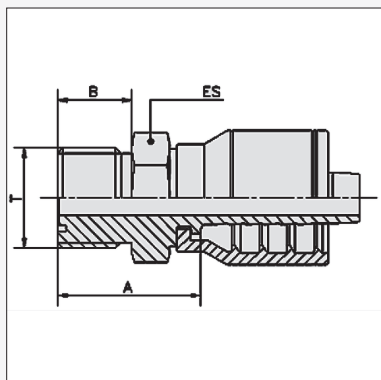

Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	ES	
OM1-0404T †	9/16" - 18	04	04	6	1/4"	04		9.8	15	
OM1-0606T	11/16" - 16	06	06	10	3/8"	06		11.2	19	
OM1-0808T †	13/16" - 16	08	08	12	1/2"	08		12.8	22	
OM1-1008T †	1" - 14	10	10	16	1/2"	08		15.5	27	

† Available only to special order

ORFS FITTINGS


ORFS FITTINGS

ORIGIN: NORTH AMERICA



OF4


O-RING FACE SEAL FEMALE 45° ELBOW

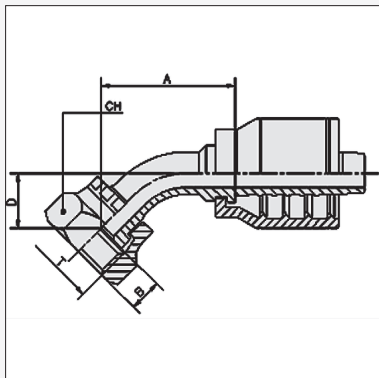

Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
OF4-0404T	9/16" - 18	04	04	6	1/4"	04	43.5	8	11	19
OF4-0604T	11/16" - 16	06	06	6	1/4"	04	36	9.5	15	22
OF4-0606T	11/16" - 16	06	06	10	3/8"	06	47.5	9.5	15	22
OF4-0806T	13/16" - 16	08	08	10	3/8"	06	43.5	11	15	24
OF4-0808T	13/16" - 16	08	08	12	1/2"	08	56.5	11	14	24
OF4-1010T	1" - 14	10	10	16	5/8"	10	56.5	13.5	21	30
OF4-1210T	1.3/16"-12	12	12	16	5/8"	10	60.5	14.5	23.2	36
OF4-1212T	1.3/16" - 12	12	12	20	3/4"	12	64.4	14.5	21.5	36

OF9

O-RING FACE SEAL FEMALE 90° ELBOW

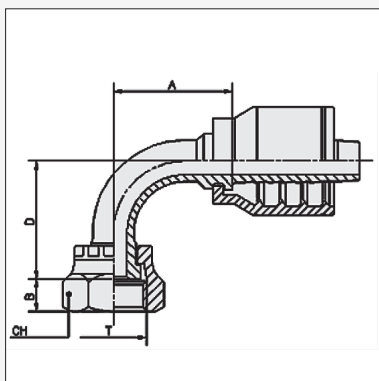

Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
OF9-0404T	9/16" - 18	04	04	6	1/4"	04	29	8	25	19
OF9-0604T	11/16" - 16	06	06	6	1/4"	04	27	9.5	27	22
OF9-0606T	11/16" - 16	06	06	10	3/8"	06	32.5	9.5	28	22
OF9-0806T	13/16" - 16	08	08	10	3/8"	06	33	11	30	24
OF9-0808T	13/16" - 16	08	08	12	1/2"	08	40.5	11	30	24
OF9-1008T	1" - 14	10	10	12	1/2"	08	44	13.5	34	30
OF9-1010T	1" - 14	10	10	16	5/8"	10	49	13.5	41	30

METRIC FITTINGS

ORIGIN: GERMANY




T SERIES

METRIC FITTINGS

DLF1


DKL (LIGHT) METRIC FEMALE
STRAIGHT

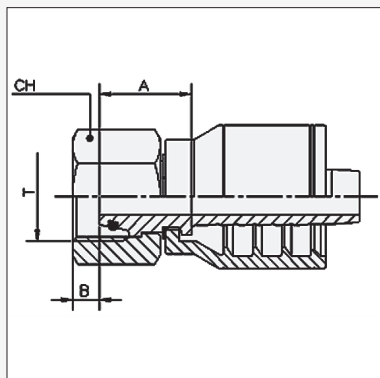

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	
DLF1-1204T	M12 x 1.5	12	6 L	6	1/4"	04	20.9	2.6	16	
DLF1-1404T	M14 x 1.5	14	8 L	6	1/4"	04	25	1.5	17	
DLF1-1604T	M16 x 1.5	16	10 L	6	1/4"	04	26.5	1.5	19	
DLF1-1605T	M16 x 1.5	16	10 L	8	5/16"	05	26.5	1.5	19	
DLF1-1805T	M18 x 1.5	18	12 L	8	5/16"	05	26	1.5	22	
DLF1-1606T	M16 x 1.5	16	10 L	10	3/8"	06	27.5	1.5	19	
DLF1-1806T	M18 x 1.5	18	12 L	10	3/8"	06	26	1.5	22	
DLF1-2206T	M22 x 1.5	22	15 L	10	3/8"	06	27.5	2.5	27	
DLF1-2208T	M22 x 1.5	22	15 L	12	1/2"	08	28.5	2.5	27	
DLF1-2610T	M26 x 1.5	26	18 L	16	5/8"	10	29	2	32	
DLF1-3012T	M30 x 2	30	22 L	20	3/4"	12	29.5	3.5	36	
DLF1-3616T	M36 x 2	36	28 L	25	1"	16	30.5	3.5	41	

DLF9


DKL (LIGHT) METRIC FEMALE
90° ELBOW

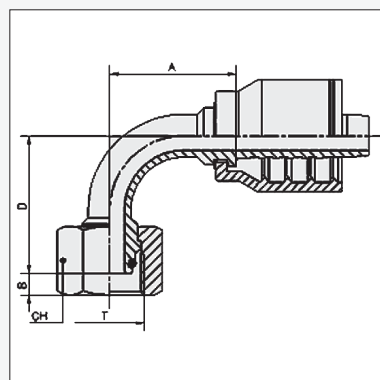

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH
DLF9-2610T	M26 x 1.5	26	18 L	16	5/8"	10	54	2	56	32

DLM1

DKL (LIGHT) METRIC MALE
STRAIGHT

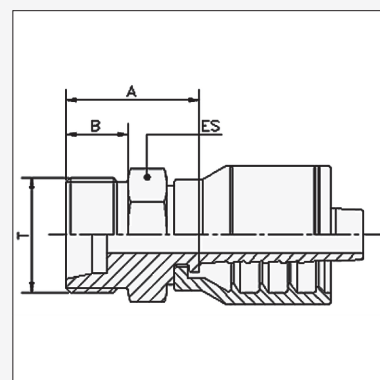

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	ES	
DLM1-1204T	M12 x 1.5	12	6 L	6	1/4"	04	22.5	10	14	
DLM1-1404T	M14 x 1.5	14	8 L	6	1/4"	04	22.5	10	14	
DLM1-1605T	M16 x 1.5	16	10 L	08	5/16"	05	24.5	11	17	
DLM1-1606T	M16 x 1.5	16	10 L	10	3/8"	06	24.5	11	17	
DLM1-1806T	M18 x 1.5	18	12 L	10	3/8"	06	25	11	19	
DLM1-2206T	M22 x 1.5	22	15 L	10	3/8"	06	26	12	22	
DLM1-2208T	M22 x 1.5	22	15 L	12	1/2"	08	26.5	12	22	
DLM1-2610T	M26 x 1.5	26	18 L	16	5/8"	10	29	12	27	
DLM1-3012T	M30 x 2	30	22 L	20	3/4"	12	31.5	14	30	
DLM1-3616T	M36 x 2	36	28 L	25	1"	16	33.5	14	36	




This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

METRIC FITTINGS

ORIGIN: GERMANY




DSF1

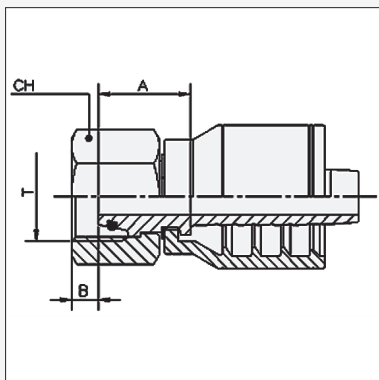DKS (HEAVY) METRIC FEMALE
STRAIGHT


Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	
DSF1-1604T	M16 x 1.5	16	8 S	6	1/4"	04	26.5	2.5	19	
DSF1-1804T	M18 x 1.5	18	10 S	6	1/4"	04	28	2	22	
DSF1-2005T	M20 x 1.5	20	12 S	8	5/16"	05	27	2	24	
DSF1-2006T	M20 x 1.5	20	12 S	10	3/8"	06	25.5	2	24	
DSF1-2206T	M22 x 1.5	22	14 S	10	3/8"	06	28.5	4	27	
DSF1-2408T	M24 x 1.5	24	16 S	12	1/2"	08	32	3	30	
DSF1-3612T	M36 x 2	36	25 S	20	3/4"	12	39.5	3	46	

DSM1

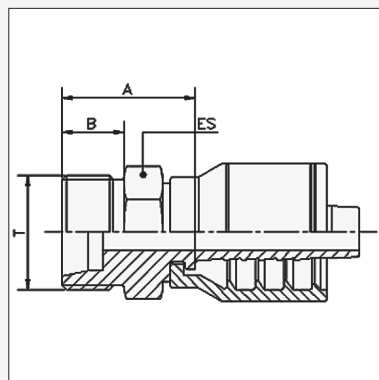DKS (HEAVY) METRIC MALE
STRAIGHT

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	ES	
DSM1-1604T	M16 x 1.5	16	8 S	6	1/4"	04	26	12	17	
DSM1-1804T	M18 x 1.5	18	10 S	6	1/4"	04	26	12	19	
DSM1-2006T	M20 x 1.5	20	12 S	10	3/8"	06	26	12	22	
DSM1-2206T	M22 x 1.5	22	14 S	10	3/8"	06	28	14	22	
DSM1-2408T	M24 x 1.5	24	16 S	12	1/2"	08	28.5	14	24	
DSM1-3612T	M36 x 2	36	25 S	20	3/4"	12	36.5	18	36	

SPM1

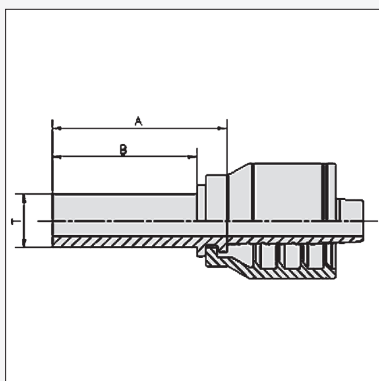METRIC STANDPIPE
STRAIGHT

Product Code	Metric Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	T	A	B	
SPM1-0603T	06	06	6 L/S	05	3/16"	03	6	28	22	
SPM1-1608T	16	16	16 S	12	1/2"	08	16	37	30	
SPM1-3016T	30	30	30 S	25	1"	16	30	53.5	44	

METRIC FITTINGS


ORIGIN: GERMANY



T SERIES

BM1

METRIC BANJO STRAIGHT

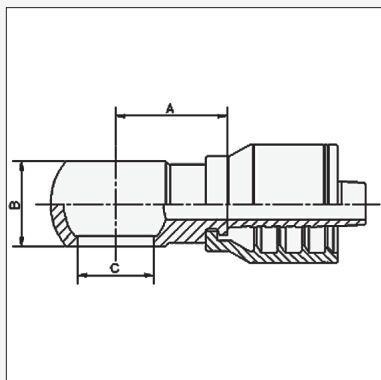


Product Code	Banjo		Nominal ID			Dimensions mm			
	Bolt	Size	DN	Inch	Size	A	C	B	
KBM1-1003T †	M10 x 1	10	5	3/16"	03	25	10	10	
BM1-1003T	M10 x 1	10	5	3/16"	03	21	10	10	
BM1-1004T	M10 x 1	10	6	1/4"	04	22	10	10	
BM1-1204T	M12 x 1.5	12	6	1/4"	04	21	12	12	
BM1-1406T	M14 x 1.5	14	10	3/8"	06	24	14	14	
BM1-1606T	M16 x 1.5	16	10	3/8"	06	24	16	18	

† Used in the replacement of Komatsu tube assemblies 195-22-12340 and 195-22-22380

BMB

METRIC BANJO BOLT

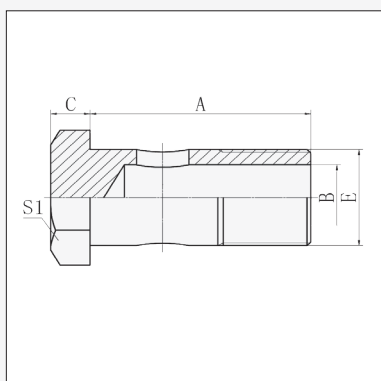


Product Code	Metric Thread		Hose Bore			Dimension (mm)				
	E	Size	DN	Inch	Size	A	B	C	S1	E
BMB-10	M10 x 1	10	05	3/16"	03	22	4	5	15	10
BMB-12	M12 x 1.5	12	06	1/4"	04	24	6	6	17	12
BMB-14	M14 x 1.5	14	10	3/8"	06	26	8	7	19	14
BMB-16	M16 x 1.5	16	10	3/8"	06	28	9	7.5	22	16
BMB-18	M18 x 1.5	18	10, 12	3/8", 1/2"	06, 08	32	11	8	24	18
BMB-22	M22 x 1.5	22	16	5/8"	10	39	14	9	27	22
BMB-26	M26 x 1.5	26	20	3/4"	12	45	18	10	32	26

METRIC FITTINGS

JAPANESE FITTINGS


ORIGIN: JAPAN



JBF1

JIS BSPP

FEMALE STRAIGHT (MITSUBISHI)

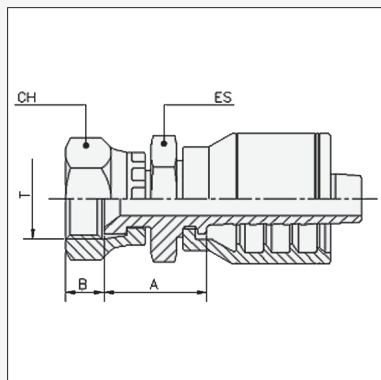


Product Code	Thread			Hose Bore			Dimensions (mm)			
	BSPP	Size	Pipe	DN	Inch	Size	A	B	CH	ES
JBF1-0404T	1/4" - 19	04	1/4"	06	1/4"	04	21	8	19	19
JBF1-0606T	3/8" - 19	06	3/8"	10	3/8"	06	22	9.5	22	19
JBF1-0808T	1/2" - 14	08	1/2"	12	1/2"	08	24.9	11	27	22
JBF1-1010T	5/8" - 14	10	5/8"	16	5/8"	10				

JMF1

JIS METRIC

FEMALE STRAIGHT (KOMATSU)

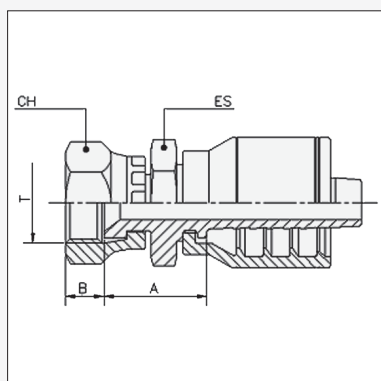

Product Code	Thread			Hose Bore			Dimensions (mm)			
	Metric	Size	Pipe	DN	Inch	Size	A	B	CH	ES
JMF1-1204T	M12 x 1.5	12	12	06	1/4"	04	22.5	8.7	17	14
JMF1-1404T	M14 x 1.5	14	14	06	1/4"	04	24	10	19	19
JMF1-1406T	M14 x 1.5	14	14	10	3/8"	06	25	10	19	19
JMF1-1606T	M16 x 1.5	16	16	10	3/8"	06	23.2	9.3	22	19
JMF1-1806T	M18 x 1.5	18	18	10	3/8"	06	24	11.5	24	19
JMF1-2006T	M20 x 1.5	20	20	10	3/8"	06	25.3	11.2	27	19
JMF1-2206T	M22 x 1.5	22	22	10	3/8"	06	25.5	14	27	19
JMF1-2208T	M22 x 1.5	22	22	12	1/2"	08	27	14	27	22
JMF1-2408T	M24 x 1.5	24	24	12	1/2"	08	28.4	15.1	32	24
JMF1-2410T	M24 x 1.5	24	24	16	5/8"	10	28.4	15.1	32	24
JMF1-2412T	M24 x 1.5	24	24	20	3/4"	12	29.9	15.1	32	27
JMF1-3012T	M30 x 1.5	30	30	20	3/4"	12	33.2	18.3	36	30
JMF1-3312T	M33 x 1.5	33	33	20	3/4"	12	32.2	21.3	41	32

MISCELLANEOUS FITTINGS


WELD ON



T SERIES

WO1


WELD ON STRAIGHT TAIL
(LIFESAVER)

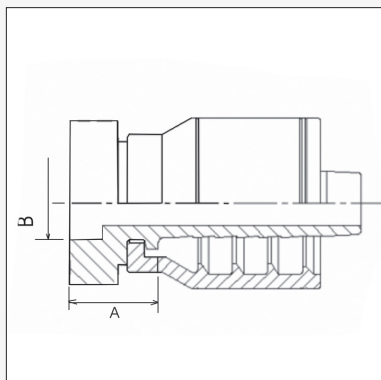

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	ø B		
WO1-0404T	04	04	1/4"	06	1/4"	04	14.5	6.5		
WO1-0606T	06	06	3/8"	10	3/8"	06	10.5	9.55		
WO1-0808T	08	08	1/2"	12	1/2"	08	17	12.85		
WO1-1010T	10	10	5/8"	16	5/8"	10	17	16		
WO1-1212T	12	12	3/4"	20	3/4"	12	18.5	19.2		
WO1-1616T	16	16	1"	25	1"	16	22.5	25.6		

HJ1


HOSE JOINER
CRIMP STYLE

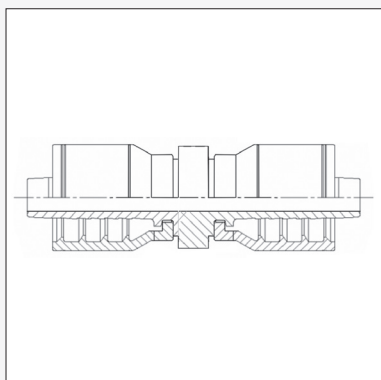

Product Code	Hose Tail			Hose Tail			Dimensions (mm)			
	DN	Inch	Size	DN	Inch	Size	A	L	d	
HJ1-0404T	06	1/4"	04	06	1/4"	04	8.4	48	4.3	
HJ1-0505T	08	5/16"	05	08	5/16"	05	12	67.9	5.5	
HJ1-0606T	10	3/8"	06	10	3/8"	06	8.4	52.4	7.6	

KT1

KARCHER® STRAIGHT HOSE TAIL
COMPLETE WITH NUT

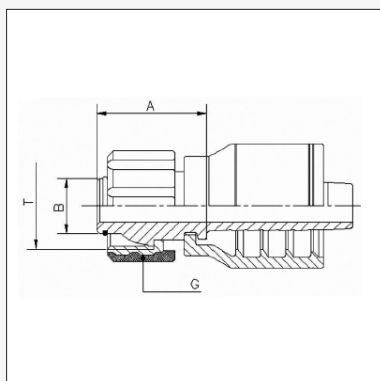

"Product Code"	Hose Bore			Dimensions (mm)			
	DN	Inch	Size	T	A	B	G
KT1-2204T	6	1/4"	4	M22 x 1.5	33	14	36

MISCELLANEOUS


FERRULES

ORIGIN: N/A



IF


INTERLOCK FERRULES

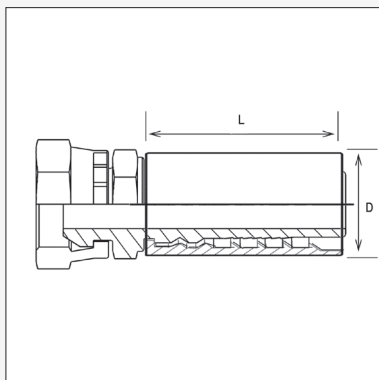

Product Code	To Suit Hose	Hose Bore			Dimension (mm)	
		DN	Inch	Size	L	Ø D
IF13-12I	C35, C42, 100 R13, 100 R15	20	3/4"	12	60	38
IF13-16I	C35, C42, 100 R13, 100 R15	25	1"	16	74.5	46
IF13-20I	C35, C42, 100 R13, XT5, 100 R15	32	1.1/4"	20	88	60
IF13-24I	C35, C42, 100 R13, XT5, 100 R15	38	1.1/2"	24	94	67
IF13-32I	C35, C42, 100 R13, XT5	50	2"	32	99	84.5
IFSWB433-08I	WB2-08 (WATER BLAST)	12	1/2"	08	53	32.8
IFSWB442-12I	WB2-12 (WATER BLAST)	20	3/4"	12	61	41.8
IFSWB636-08I	WB3-08 (WATER BLAST)	12	1/2"	08	54.9	35.9

IFBS & IFEH

INTERLOCK EXTRA HEAVY FERRULES

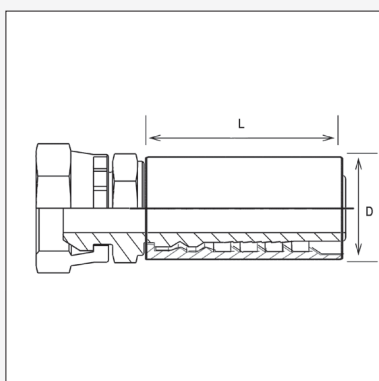

Product Code	To Suit Hose	Hose Bore			Dimension (mm)	
		DN	Inch	Size	L	Ø D
IFBS-32I	C42-32 Series II	50	2"	32	109.0	87.2
IFEH-32I	C42EH-32	50	2"	32	107.1	87.6

These ferrules are for use within a complete 'extra heavy' environment. For maximum effectiveness, all components of the system should be deployed.

The recommended components include:

Hose Guard **EHG-032**

Hose Boot **EBH-032**

Sealing rings for the hose tail **YEH-32** (2 required)

A compatible interlock hose tail with 'EH' designation in the Product Code


See page G76 for hose guard and boot details.

Additionally, those tails utilising a tapered flange must use the appropriate flange clamp **AFTF6-32**



JFI


JIC FEMALE STRAIGHT

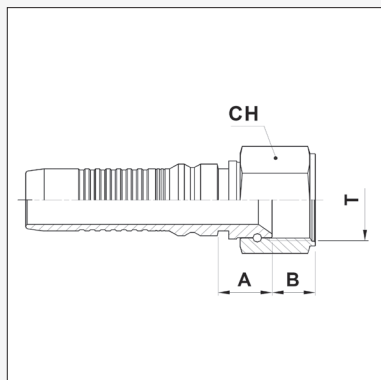

Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread T	Size	Tube	DN	Inch	Size	A	B	CH	
JF1-1712I	1.1/16" - 12	17	12	20	3/4"	12	19.5	13.8	32	
JF1-2116I	1.5/16" - 12	21	16	25	1"	16	21	16	38	
JF1-2620I	1.5/8" - 12	26	20	32	1.1/4"	20	25.3	16	50	

JF4


JIC FEMALE 45° ELBOW

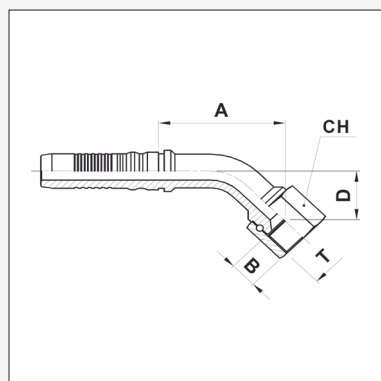

Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread T	Size	Tube	DN	Inch	Size	A	B	CH	D
JF4-1712I	1.1/16" - 12	17	12	20	3/4"	12	73.5	13.8	32	31
JF4-2116I	1.5/16" - 12	21	16	25	1"	16	82	16	38	42
JF4-2620I	1.5/8" - 12	26	20	32	1.1/4"	20	94.7	16	50	36.3

JF9

JIC FEMALE 90° ELBOW

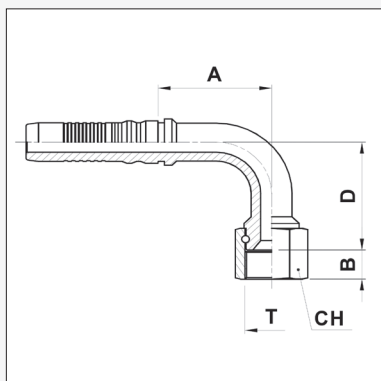

Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread T	Size	Tube	DN	Inch	Size	A	B	CH	D
JF9-1712I	1.1/16" - 12	17	12	20	3/4"	12	59.2	13.8	32	59
JF9-2116I	1.5/16" - 12	21	16	25	1"	16	68	16	38	77
JF9-2620I	1.5/8" - 12	26	20	32	1.1/4"	20	79.7	16	50	77

SAE FLANGES


ORIGIN: NORTH AMERICA



LOCK

C616


3000 PSI CODE 61
60° ELBOW FLANGE

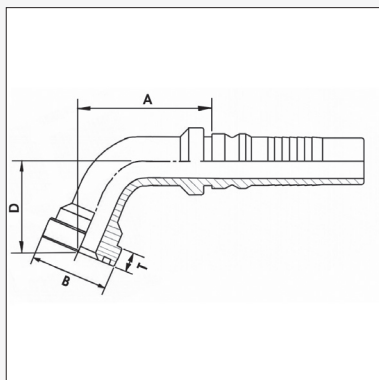

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	D
C616-3232I	2"	32	2.13/16"	50	2"	32	195.5	71.4		75

C619

3000 PSI CODE 61
90° ELBOW FLANGE

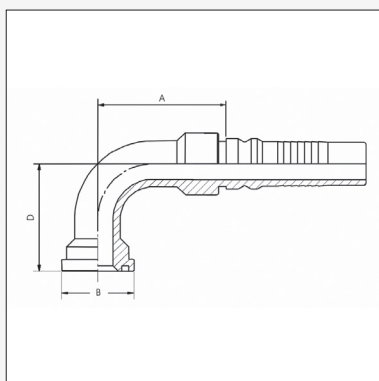


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	D
C619-2020I	1.1/4"	20	2"	32	1.1/4"	20	83.7	50.8		69.2
C619-3232I	2"	32	2.13/16"	50	2"	32	145	71.4		123



C621 / C621L

6000 PSI CODE 62

STANDARD AND EXTENDED STRAIGHT FLANGES

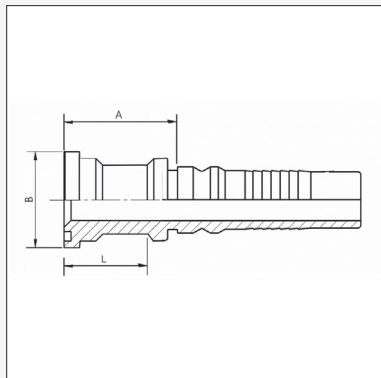

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	L	
C621-1616I	1"	16	1.7/8"	25	1"	16	57.5	47.6		
C621-2016I	1.1/4"	20	2.1/8"	25	1"	16	64.5	54		
C621-2020I	1.1/4"	20	2.1/8"	32	1.1/4"	20	67.2	54		
C621-2420I	1.1/2"	24	2.1/2"	32	1.1/4"	20	73.2	63.5		
C621-2424I	1.1/2"	24	2.1/2"	38	1.1/2"	24	73	63.5		
C621-3224I	2"	32	3.1/8"	38	1.1/2"	24	82	79.4		
C621-3232I	2"	32	3.1/8"	50	2"	32	83.5	79.4		
C621BS-3232I	2"	32	3.1/8"	50	2"	32	100	79.4		
C621EH-3232I †	2"	32	3.1/8"	50	2"	32	92.3	79.4		
EXTENDED NECK FLANGES										
C621L-2020I-090	1.1/4"	20	2.1/8"	32	1.1/4"	20	95.2	54	90	
C621L-2424I-100	1.1/2"	24	2.1/2"	38	1.1/2"	24	105.5	63.5	100	


† Use of Hose Guard and Boot **HG-032** and **EHB-032** is recommended in conjunction. See page G76

These Extra Heavy fittings require also Ferrule **IFEH-32I** and 2 O-Rings **YEH-32** (as a seal on the tail)

C621C

6000 PSI SUPERCAT

STRAIGHT SUPERCAT FLANGE

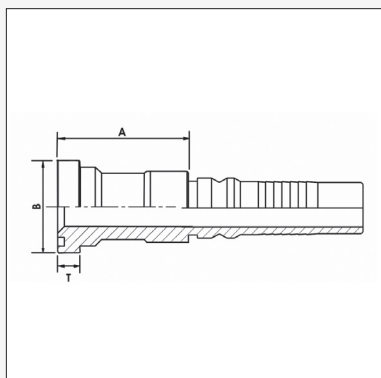


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	
C621C-2020I	1.1/4"	20	2.1/8"	32	1.1/4"	20	71.4	54	14.2	
C621C-2420I	1.1/2"	24	2.1/2"	32	1.1/4"	20	75.2	63.5	14.2	
C621C-2424I	1.1/2"	24	2.1/2"	38	1.1/2"	24	75	63.5	14.2	

C621EHTF

6000 PSI EXTRA HEAVY

STRAIGHT TAPERED FLANGE

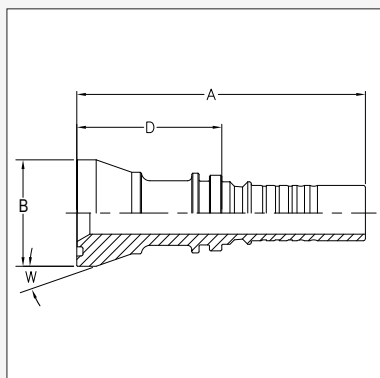

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	D	øB	A	H
C621EHTF-3232I †	2"	32	3.1/8"	50	2"	32	107	83.5	215	-

† Use of Hose Guard and Boot **HG-032** and **EHB-032** is recommended in conjunction. See page G76

These Extra Heavy fittings require also Ferrule **IFEH-32I** and 2 O-Rings **YEH-32** (as a seal on the tail)

The appropriate flange clamp is designated **AFTF6-32** (see page D83)


SAE FLANGES

ORIGIN: NORTH AMERICA



C622


6000 PSI CODE 62
20° ELBOW FLANGE

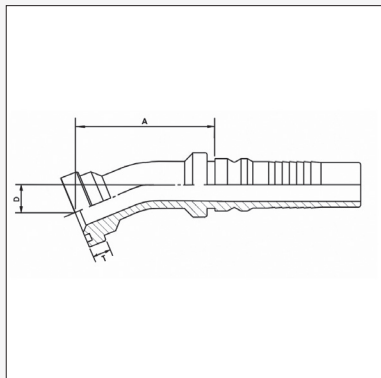

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	D
C622-2424I	1.1/2"	24	2.1/2"	38	1.1/2"	24		63.5	12.6	
C622-3232I	2"	32	3.1/8"	50	2"	32	83.5	79.4	12.6	21

C622C


6000 PSI SUPERCAT
22° ELBOW SUPERCAT FLANGE

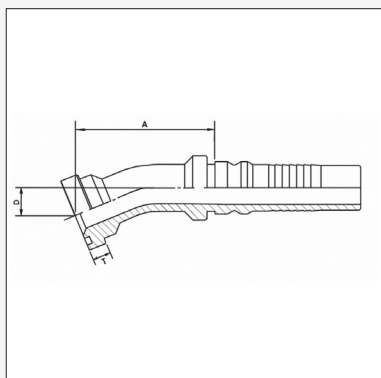

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	D
C622C-2020I	1.1/4"	20	2.1/8"	32	1.1/4"	20	129.7	54	14.2	21

C622EHTF

6000 PSI EXTRA HEAVY
22½° ELBOW TAPERED FLANGE

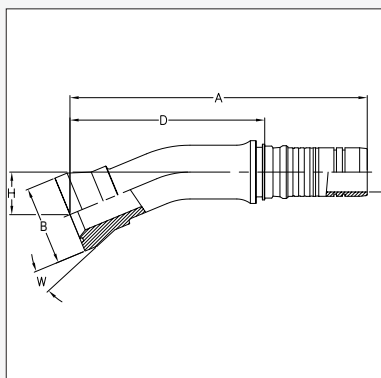

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	D	øB	A	H
C622EHTF-3232I †	2"	32	3.1/8"	50	2"	32	205	83.5	315	45


† Use of Hose Guard and Boot **HG-032** and **EHB-032** is recommended in conjunction. See page G76
These Extra Heavy fittings require also Ferrule **IFEH-32I** and 2 O-Rings **YEH-32** (as a seal on the tail)
The appropriate flange clamp is designated **AFTF6-32** (see page D83)



C623C

6000 PSI SUPERCAT

30° ELBOW SUPERCAT FLANGE

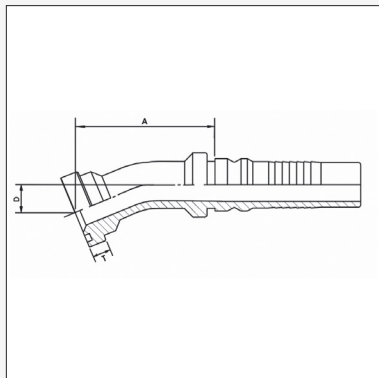


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	D
C623C-1212I	3/4"	12	1.5/8"	20	3/4"	12	79	41.3	14.2	22
C623C-1612I	1"	16	1.7/8"	20	3/4"	12	83	47.6	14.2	26
C623C-1616I	1"	16	1.7/8"	25	1"	16	85.5	47.6	14.2	21
C623C-2016I	1.1/4"	20	2.1/8"	25	1"	16	99.5	54	14.2	29
C623C-2020I	1.1/4"	20	2.1/8"	32	1.1/4"	20	119	54	14.2	30.5
C623C-2420I	1.1/2"	24	2.1/2"	32	1.1/4"	20	124.7	63.5	14.2	30
C623C-2424I	1.1/2"	24	2.1/2"	38	1.1/2"	24	133	63.5	14.2	29.5

C624

6000 PSI CODE 62

45° ELBOW FLANGE

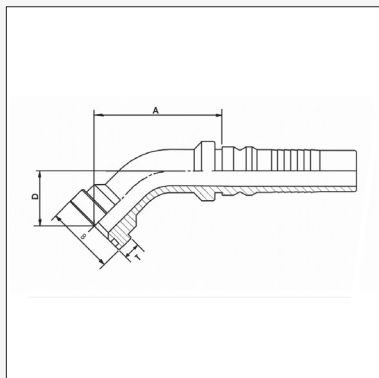

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	D
C624-1616I	1"	16	1.7/8"	25	1"	16	79	47.6	9.53	31
C624-2016I	1.1/4"	20	2.1/8"	25	1"	16	92	54	10.29	39
C624-2020I	1.1/4"	20	2.1/8"	32	1.1/4"	20	111	54	10.29	43.5
C624-2420I	1.1/2"	24	2.1/2"	32	1.1/4"	20	112	63.5	12.57	48
C624-2424I	1.1/2"	24	2.1/2"	38	1.1/2"	24	122	63.5	12.57	47
C624-3224I	2"	32	3.1/8"	38	1.1/2"	24	133.5	79.4	12.57	57
C624-3232I	2"	32	3.1/8"	50	2"	32	164.6	79.4	12.57	60
C624BS-3232I-065	2"	32	3.1/8"	50	2"	32	162	79.4	12.57	65
C624EHL-3232I-069 †	2"	32	3.1/8"	50	2"	32	189.2	79.4	12.57	69


† Use of Hose Guard and Boot **HG-032** and **EHB-032** is recommended in conjunction. See page G76

These Extra Heavy fittings require also Ferrule **IFEH-32I** and 2 O-Rings **YEH-32** (as a seal on the tail)

C624C

6000 PSI SUPERCAT

45° ELBOW SUPERCAT FLANGE

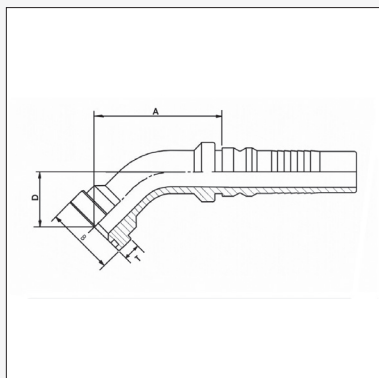

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	D
C624C-2420I	1.1/2"	24	2.1/2"	32	1.1/4"	20	114	63.5	14.2	45.2
C624C-2424I	1.1/2"	24	2.1/2"	38	1.1/2"	24	123	63.5	14.2	48


SAE FLANGES

ORIGIN: NORTH AMERICA



C624EHTF

6000 PSI EXTRA HEAVY
45° ELBOW TAPERED FLANGE

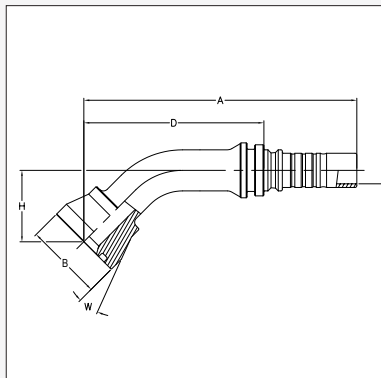

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	D	øB	A	H
C624EHTF-3232I †	2"	32	3.1/8"	50	2"	32	200	83.5	308	90


† Use of Hose Guard and Boot **HG-032** and **EHB-032** is recommended in conjunction. See page G76

These Extra Heavy fittings require also Ferrule **IFEH-32I** and 2 O-Rings **YEH-32** (as a seal on the tail)

The appropriate flange clamp is designated **AFTF6-32** (see page D83)

C626


6000 PSI CODE 62
60° ELBOW FLANGE

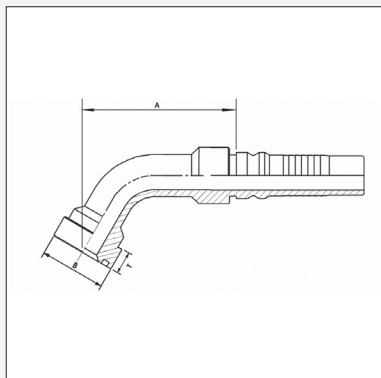

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	D
C626-2020I	1.1/4"	20	2.1/8"	32	1.1/4"	20	108	54		55
C626-2424I	1.1/2"	24	2.1/2"	38	1.1/2"	24	136	63.5		68

C626C

6000 PSI SUPERCAT
60° ELBOW SUPERCAT FLANGE

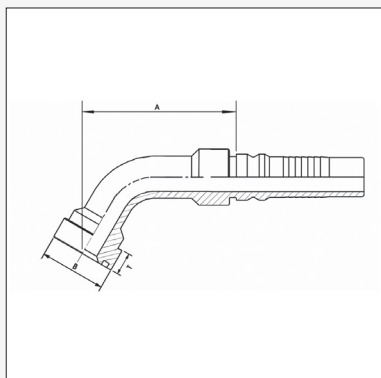


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	D
C626C-1212I	3/4"	12	1.5/8"	20	3/4"	12	81	41.3	14.2	50
C626C-1612I	1"	16	1.7/8"	20	3/4"	12	85	47.6	14.2	51
C626C-1616I	1"	16	1.7/8"	25	1"	16	109.5	47.6	14.2	59
C626C-2016I	1.1/4"	20	2.1/8"	25	1"	16	110.5	54	14.2	59.5
C626C-2020I	1.1/4"	20	2.1/8"	32	1.1/4"	20	124.7	54	14.2	61
C626C-2420I	1.1/2"	24	2.1/2"	32	1.1/4"	20	132.2	63.5	14.2	65.5
C626C-2424I	1.1/2"	24	2.1/2"	38	1.1/2"	24	154.5	63.5	14.2	65



C627C

6000 PSI SUPERCAT

67° ELBOW SUPERCAT FLANGE

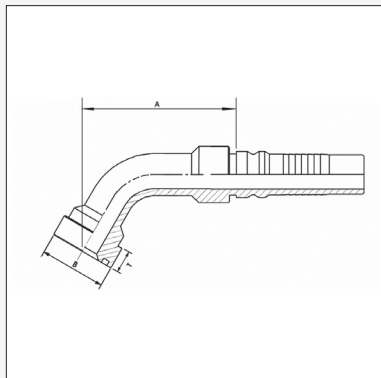


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	D
C627C-1616I	1"	16	1.7/8"	25	1"	16	108.5	47.6	14.2	60
C627C-2020I	1.1/4"	20	2.1/8"	32	1.1/4"	20	123.5	54	14.2	63

C629 / C629L

6000 PSI CODE 62

STANDARD AND LONG DROP 90° ELBOW FLANGES

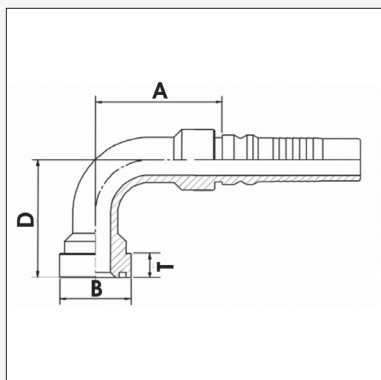

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	D
C629-1616I	1"	16	1.7/8"	25	1"	16	73	47.6	9.53	66
C629-2016I	1.1/4"	20	2.1/8"	25	1"	16	76	54	10.29	80
C629-2020I	1.1/4"	20	2.1/8"	32	1.1/4"	20	97	54	10.29	86
C629-2420I	1.1/2"	24	2.1/2"	32	1.1/4"	20	99.5	63.5	12.57	97
C629-2024I	1.1/4"	20	2.1/8"	38	1.1/2"	24		54	10.29	86
C629-2424I	1.1/2"	24	2.1/2"	38	1.1/2"	24	108.5	63.5	12.57	104
C629-3224I	2"	32	3.1/8"	38	1.1/2"	24	115.5	79.4	12.57	119.5
C629-3232I	2"	32	3.1/8"	50	2"	32	145	79.4	12.57	134
C629BS-3232I-155	2"	32	3.1/8"	50	2"	32	143	79.4	12.57	155
C629EHL-3232I-150 †	2"	32	3.1/8"	50	2"	32	173.2	79.4	12.57	150
LONG DROP ELBOWS										
C629L-2020I-100	1.1/4"	20	2.1/8"	32	1.1/4"	20	97.7	54	10.29	100
C629L-2020I-150	1.1/4"	20	2.1/8"	32	1.1/4"	20	97.7	54	10.29	150
C629L-2420I-135	1.1/2"	24	2.1/2"	32	1.1/4"	20	99.5	63.5	12.57	135

† Use of Hose Guard **HG-32** and Boot **EHB-032** is recommended in conjunction. See page G76

These Extra Heavy fittings require also Ferrule **IFEH-32I** and 2 O-Rings **YEH-32** (as a seal on the tail)

SAE FLANGES


ORIGIN: NORTH AMERICA



C629C

6000 PSI SUPERCAT

90° ELBOW SUPERCAT FLANGE

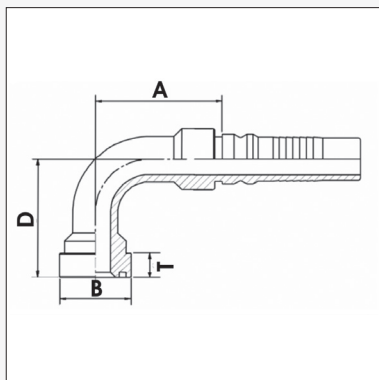


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	T	D
C629C-2020I	1.1/4"	20	2.1/8"	32	1.1/4"	20	97	54	14.2	90
C629C-2420I	1.1/2"	24	2.1/2"	32	1.1/4"	20	99.9	63.5	14.2	99
C629C-2424I	1.1/2"	24	2.1/2"	38	1.1/2"	24	108.5	63.5	14.2	106

C629EHTF

6000 PSI EXTRA HEAVY

90° ELBOW TAPERED FLANGE

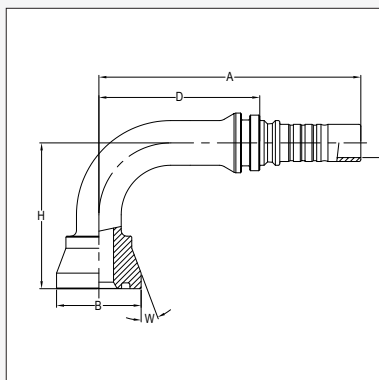

Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	D	øB	A	H
C629EHTF-3232I †	2"	32	3.1/8"	50	2"	32	165	83.5	273	180

† Use of Hose Guard and Boot **HG-032** and **EHB-032** is recommended in conjunction. See page G76

These Extra Heavy fittings require also Ferrule **IFEH-32I** and 2 O-Rings **YEH-32** (as a seal on the tail)


The appropriate flange clamp is designated **AFTF6-32** (see page D83)

WATERBLAST FITTINGS

DSF1†

METRIC DKS

STRAIGHT FEMALE (WATERBLAST APPLICATIONS)

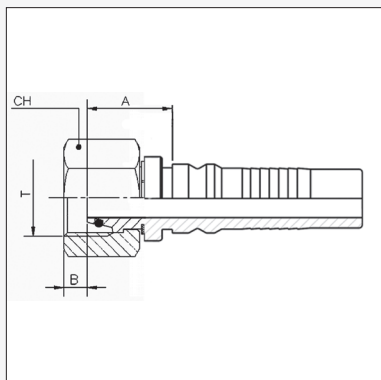


Product Code	Metric Thread			Hose Bore			Dimensions (mm)		
	Thread	Size	Tube	DN	Inch	Size	A	B	CH
DSF1-2408WBI	M24 x 1.5	24	16 S	12	1/2"	08	31	3	30
DSF1-3612WBI	M36 x 2	36	25 S	20	3/4"	12	42	3	46

† These fittings are for fitment to waterblast hose **WB2 & WB3** in combination with **IFSWB** Ferrules

NM1†

NPTF MALE STRAIGHT

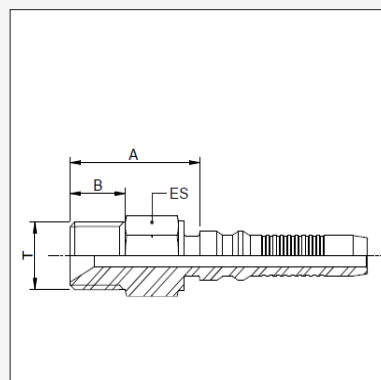

"Product Code"	NPT Thread			Nominal ID			Dimensions (mm)		
	T	Size	Pipe	DN	Inch	Size	A	B	ES
NM1-0808WBI	1/2" - 14	08	1/4"	12	1/2"	08	44.5	19.0	22

† These fittings are for fitment to waterblast hose **WB2 & WB3** in combination with **IFSWB** Ferrules


SAE FLANGES

ORIGIN: NORTH AMERICA



93200 / 93400 / 95400


3000 PSI CODE 61
STRAIGHT FLANGE

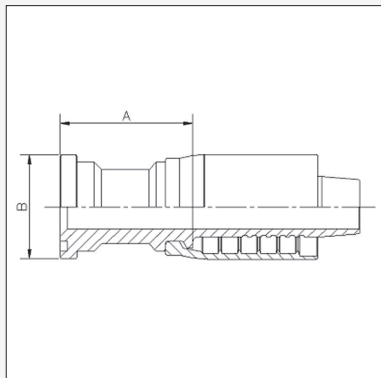

Product Code	Flange			Hose Bore			Dimensions (mm)		
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	
932003240	2½"	40	3.5/16"	50	2"	32	152	84.1	
954004040	2½"	40	3.5/16"	62	2½"	40	81	84.1	
954004048	3"	48	4"	62	2½"	40	84	101.6	
934004848	3"	48	4"	76	3"	48	65	101.6	

95402


3000 PSI CODE 61
22½° ELBOW FLANGE

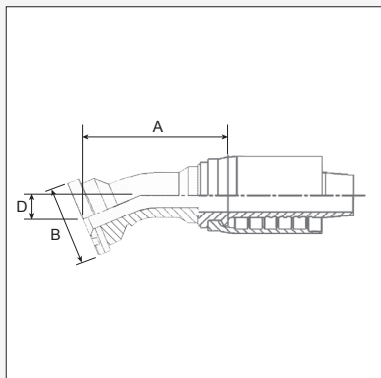

Product Code	Flange			Hose Bore			Dimensions (mm)		
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D
954024040	2½"	40	3.5/16"	62	2½"	40	113	84.1	18
954024048	3"	48	4"	62	2½"	40	115	101.6	16

93403 / 95403

3000 PSI CODE 61
30° ELBOW FLANGE

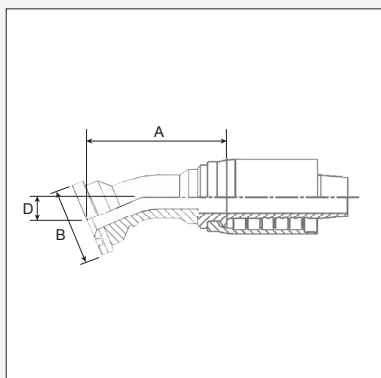

Product Code	Flange			Hose Bore			Dimensions (mm)		
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D
954034040	2½"	40	3.5/16"	62	2½"	40	122	84.1	27
954034048	3"	48	4"	62	2½"	40	123	101.6	27
934034848	3"	48	4"	76	3"	48	171	101.6	39

SAE FLANGES

ORIGIN: NORTH AMERICA




934 / 954 LARGE BORE

CODE 61 FLANGES

93204 / 93404 / 95404

3000 PSI CODE 61

45° ELBOW FLANGE

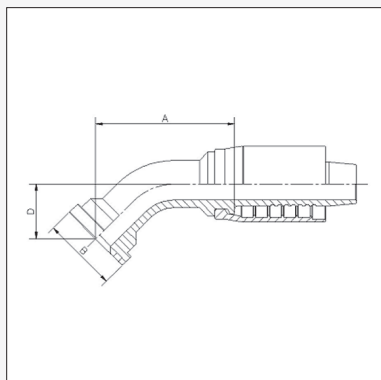


Product Code	Flange			Hose Bore			Dimensions (mm)		
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D
954044040	2½"	40	3.5/16"	62	2½"	40	136	84.1	47
954044048	3"	48	4"	62	2½"	40	137	101.6	47
934044848	3"	48	4"	76	3"	48	187	101.6	67

93406 / 95406

3000 PSI CODE 61

60° ELBOW FLANGE

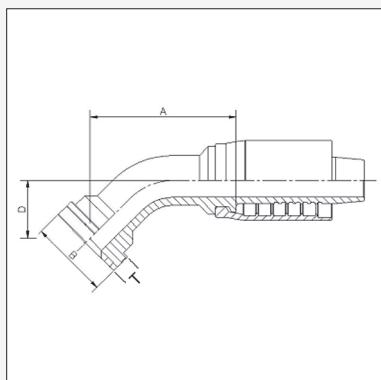


Product Code	Flange			Hose Bore			Dimensions (mm)		
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D
954064040	2½"	40	3.5/16"	62	2½"	40	169	84.1	71
954064048	3"	48	4"	62	2½"	40	168	101.6	71
934064848	3"	48	4"	76	3"	48	193	101.6	96

95407

3000 PSI CODE 61

67½° ELBOW FLANGE

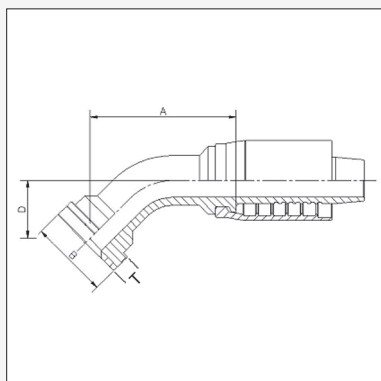

Product Code	Flange			Hose Bore			Dimensions (mm)		
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D
954074040	2½"	40	3.5/16"	62	2½"	40	158	84.1	83
954074048	3"	48	4"	62	2½"	40	158	101.6	83



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

SAE FLANGES


ORIGIN: NORTH AMERICA



93409 / 95409

3000 PSI CODE 61

90° ELBOW FLANGE

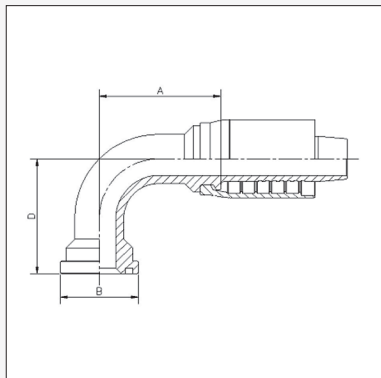


Product Code	Flange			Hose Bore			Dimensions (mm)		
	Bore	Size	ø ins.	DN	Inch	Size	A	øB	D
954094040	2½"	40	3.5/16"	62	2½"	40	141	84.1	119
954094048	3"	48	4"	62	2½"	40	141	101.6	119
934094848	3"	48	4"	76	3"	48	201	101.6	162



BF1


BSPP FEMALE STRAIGHT
(FERRULE SUPPLIED)

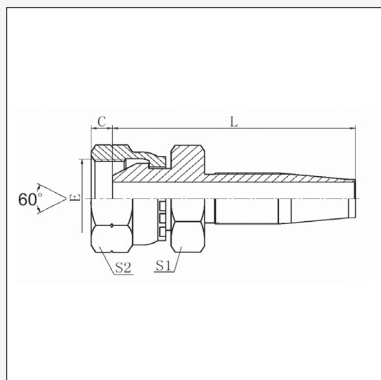

Product Code	BSPP Thread			100R5 Bore			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	L	C	S1	S2
BF1-0404A	1/4" - 19	04	1/4"	5	3/16"	04	44	5.5	14	19
BF1-0606A	3/8" - 19	06	3/8"	8	5/16"	06	52.5	6.3	17	22
BF1-0808A	1/2" - 14	08	1/2"	10	13/32"	08	61	7.5	19	27
BF1-1212A	3/4" - 14	12	3/4"	16	5/8"	12	78	10.9	27	32
BF1-1616A	1" - 11	16	1"	22	7/8"	16	68.5	11.7	32	41
BF1-2020A	1.1/4" - 11	20	1 1/4"	32	1.1/8"	20				
BF1-2424A	1.1/2" - 11	24	1 1/2"	38	1.3/8"	24				
BF1-3232A	2" - 11	32	2"	50	1.13/16"	32				

BTM1

BSPT MALE STRAIGHT
(FERRULE SUPPLIED)

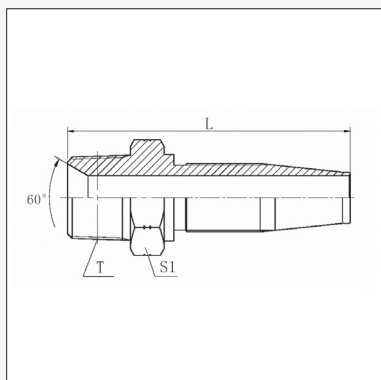


Product Code	BSPT Thread			100R5 Bore			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	L	S1		
BTM1-0404A	1/4" - 19	04	1/4"	5	3/16"	04				
BTM1-0606A	3/8" - 19	06	3/8"	8	5/16"	06				
BTM1-0808A	1/2" - 14	08	1/2"	10	13/32"	08				
BTM1-1212A	3/4" - 14	12	3/4"	16	5/8"	12				
BTM1-1616A	1" - 11	16	1"	22	7/8"	16				

NPT

ORIGIN: NORTH AMERICA



NM1

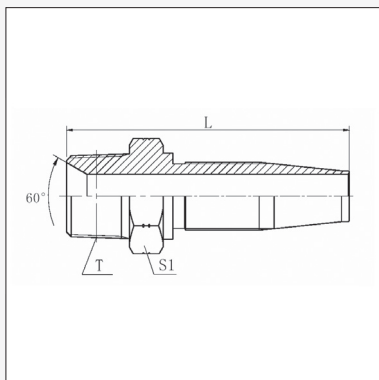
NPT MALE STRAIGHT
(FERRULE SUPPLIED)

Product Code	NPT Thread			100R5 Bore			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	L	S1		
NM1-0204A	1/8" - 27	02	1/8"	5	3/16"	04	45.5	12		
NM1-0404A	1/4" - 18	04	1/4"	5	3/16"	04	50	17		
NM1-0405A	1/4" - 18	04	1/4"	6	1/4"	05	49.8	17		
NM1-0406A	1/4" - 18	04	1/4"	8	5/16"	05		17		
NM1-0606A	3/8" - 18	06	3/8"	8	5/16"	06	58	19		
NM1-0808A	1/2" - 14	08	1/2"	10	13/32"	08	69.3			
NM1-1212A	3/4" - 14	12	3/4"	16	5/8"	12	72.5	30		
NM1-1616A	1" - 11.5	16	1"	22	7/8"	16	79.5	36		
NM1-2020A	1.1/4" - 11.5	20	1.1/4"	28	1.1/8"	20	87.5	46		
NM1-2424A	1.1/2" - 11.5	24	1.1/2"	35	1.3/8"	24	93.5	50		



JF1


JIC FEMALE STRAIGHT
(FERRULE SUPPLIED)

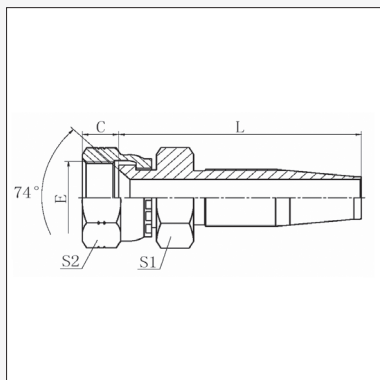

Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	L	C	S1	S2
JF1-0704A	7/16" - 20	07	04	5	3/16"	04	40	9	14	17
JF1-0805A	1/2" - 20	08	05	6	1/4"	05	45	9.5	14	17
JF1-0906A	9/16" - 18	09	06	8	5/16"	06	49	10.5	17	19
JF1-1208A	3/4" - 16	12	08	10	13/32"	08	60	11	22	24
JF1-1210A	3/4" - 16	12	08	12	1/2"	10	65	11	27	24
JF1-1410A	7/8" - 14	14	10	12	1/2"	10	66.5	13	27	27
JF1-1712A	1.1/16" - 12	17	12	16	5/8"	12	77	15	32	32
JF1-2116A	1.5/16" - 12	21	16	22	7/8"	16	64	16	38	41
JF1-2620A	1.5/8" - 12	26	20	28	1.1/8"	20	76.5	17	41	50
JF1-3024A	1.7/8" - 12	30	24	35	1.3/8"	24	79.5	20	46	55
JF1-4032A	2.1/2" - 12	40	32	46	1.13/16"	32	95	23.5	65	75

JF4


JIC FEMALE 45° ELBOW (FERRULE SUPPLIED)

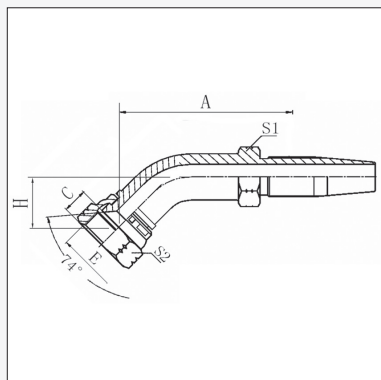

Product Code	JIC Thread			Hose Bore			Dimensions (mm)				
	Thread	Size	Tube	DN	Inch	Size	A	C	H	S1	S2
JF4-0704A	7/16" - 20	07	04	5	3/16"	04	27.9	9	8.4	14	15
JF4-0906A	9/16" - 18	09	06	8	5/16"	06	33.8		9.9		
JF4-1208A	3/4" - 16	12	08	10	13/32"	08	46.7	11	14.0	19	24
JF4-1410A	7/8" - 14	14	10	12	1/2"	10	49.5	13	16.3	24	27
JF4-1712A	1.1/16" - 12	17	12	16	5/8"	12	56.1		19.8		
JF4-2116A	1.5/16" - 12	21	16	22	7/8"	16	62.7	16	27.2	32	41

JF9 / JFL9

JIC FEMALE 90° ELBOW (FERRULE SUPPLIED)

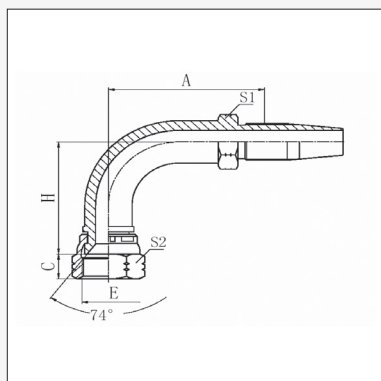

Product Code	JIC Thread			Hose Bore			Dimensions (mm)				
	Thread	Size	Tube	DN	Inch	Size	A	C	H	S1	S2
JF9-0704A	7/16" - 20	07	04	5	3/16"	04	25.1	9	17.3	14	15
JF9-0805A	1/2" - 20	08	05	6	1/4"	05	30.0	9.5	19.6	14	17
JF9-0906A	9/16" - 18	09	06	8	5/16"	06	31.2		21.6		
JFL9-0906A	9/16" - 18	09	06	8	5/16"	06	31.2		55.4		
JF9-1208A	3/4" - 16	12	08	10	13/32"	08	40.9	11	27.7	19	24
JFL9-1208A	3/4" - 16	12	08	10	13/32"	08	43.9	11	61.7	19	24
JF9-1210A	3/4" - 16	12	08	12	1/2"	10		11		24	24
JF9-1410A	7/8" - 14	14	10	12	1/2"	10	41.9	13	31.2	24	27
JFL9-1410A	7/8" - 14	14	10	12	1/2"	10	48.3	13	65.3	24	27
JF9-1712A	1.1/16" - 12	17	12	16	5/8"	12	55.1		46.2		
JF9-2116A	1.5/16" - 12	21	16	22	7/8"	16	57.9	16	60.7	32	41
JFL9-2116A	1.5/16" - 12	21	16	22	7/8"	16	57.9	16	116.3	28.4	38
JF9-2620A	1.5/8" - 12	26	20	28	1.1/8"	20	67.3	17	69.8	38	50
JF9-3024A	1.7/8" - 12	30	24	35	1.3/8"	24	121	20	97.5	46	55
JF9-4032A	2.1/2" - 12	40	32	46	1.13/16"	32	143.25	23.5	118.8	60	75


SAE FITTINGS

ORIGIN: NORTH AMERICA



SF1

SAE FEMALE STRAIGHT
(FERRULE SUPPLIED)

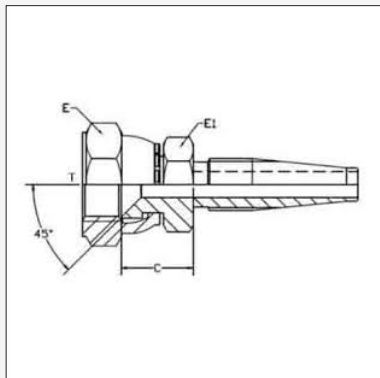


Product Code	SAE Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	T	C	E1	E
SF1-1006A	5/8" - 18	10	06	8	5/16"	06	5/8"	15.6	19	19
SF1-1712A	1.1/16" - 14	17	12	16	5/8"	12	1.1/16"		32	32

* Swivel nut thread is SAE, Seat angle is SAE at 45° (90° Inclusive)

SF4

SAE FEMALE 45° ELBOW
(FERRULE SUPPLIED)

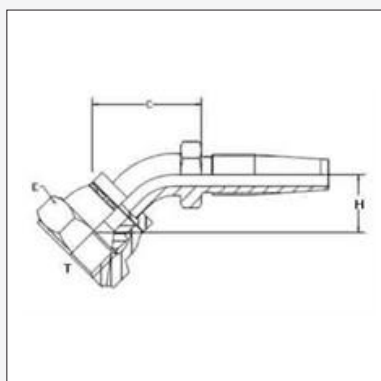


Product Code	SAE Thread			Hose Bore			Dimensions (mm)				
	Thread	Size	Tube	DN	Inch	Size	T	C	H	S1	E
SF4-1006A	5/8" - 18	10	06	8	5/16"	06	5/8"	24.5	10.0	12.7	19

* Swivel nut thread is SAE, Seat angle is SAE at 45° (90° Inclusive)

SF9

SAE FEMALE 90° ELBOW
(FERRULE SUPPLIED)

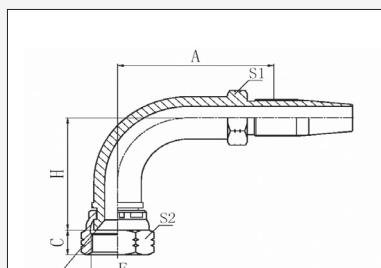


Product Code	SAE Thread			Hose Bore			Dimensions (mm)					
	Thread (E)	Size	Tube	DN	Inch	Size	E	A	C	H	S1	S2
SF9-1006A	5/8" - 18	10	06	8	5/16"	06	5/8"	33	11.3	21.3	12.7	19
SF9-1712A	1.1/16" - 14	17	12	16	5/8"	12	1.1/16"	55.1	18.5	46.2	22.1	31.7

* Swivel nut thread is SAE, Seat angle is SAE at 45° (90° Inclusive)



SFB


FERRULE TO SUIT C45 HOSE

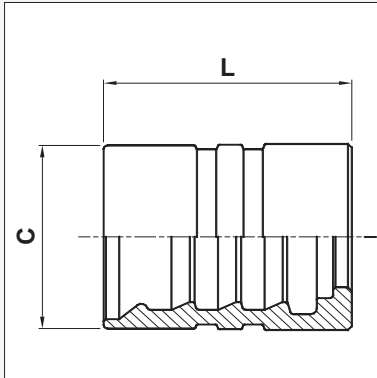

Product Code	To Suit Hose	Hose Bore			Dimensions (mm)			
		DN	Inch	Size	L	C		
SFB-10	C45-10	16	5/8"	10	38	33		

JFI

JIC FEMALE STRAIGHT

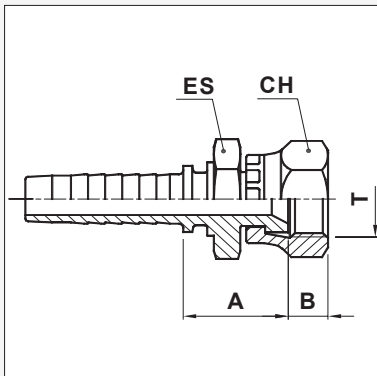


Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	ES
JF1-1210B	3/4" - 16	12	8	16	5/8"	10	27.4	10.7	24	22
JF1-1410B	7/8" - 14	14	10	16	5/8"	10	29.8	12.7	27	22

Use in conjunction with Ferrule SFB-10 on C45-10 Hose

OF1

O-RING FACE SEAL FEMALE STRAIGHT

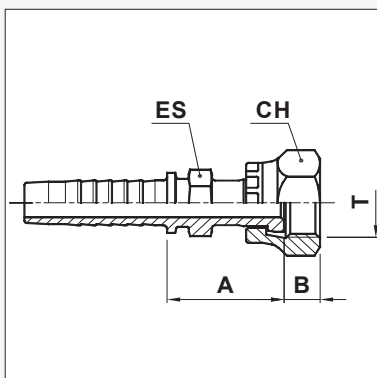

Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	ES
OF1-1010B	1" - 14	10	10	16	5/8"	10	39	13.5	30	24
OF1-1210B	1.3/16" - 12	12	12	16	5/8"	10	44.0	14.5	36	30

Use in conjunction with Ferrule SFB-10 on C45-10 Hose


ORFS / SAE FLANGE

ORIGIN: NORTH AMERICA



OF9

O-RING FACE SEAL FEMALE 90° ELBOW

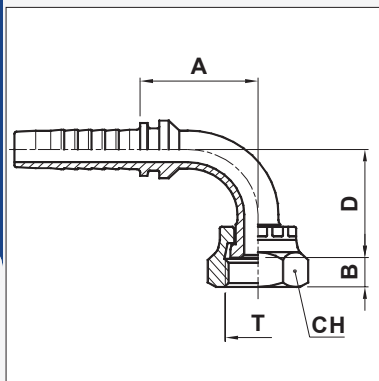


Product Code	UN Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	D
OF9-1010B	1" - 14	10	10	16	5/8"	10	56	13.5	30	51

Use in conjunction with Ferrule SFB-10 on C45-10 Hose

C629

6000 PSI CODE 62

90° ELBOW FLANGE

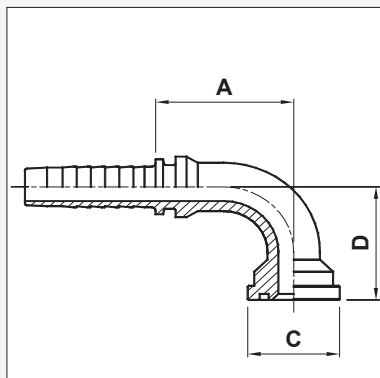


Product Code	Flange			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	A	C	D	
C629-0810B	1/2"	8	1.3/16"	16	5/8"	10	55	31.7	52	
C629-1210B	3/4"	12	1.1/2"	16	5/8"	10	53.5	41.3	58	

Use in conjunction with Ferrule SFB-10 on C45-10 Hose



BF1


BSPP FEMALE STRAIGHT

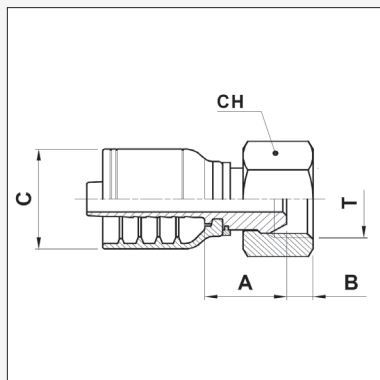

Product Code	BSPP Thread		Nominal ID			Dimensions mm				
	T	Size	Dash	Inch	DN	A	B	CH	C	
BF1-0404R	1/4" - 19	04	04	3/16"	4	16.8	4.2	19	21	
BF1-0405R	1/4" - 19	04	05	1/4"	6	16.8	4.2	19	22	
BF1-0606R	3/8" - 19	06	06	5/16"	08	18.5	6	22	24	
BF1-0808R	1/2" - 14	08	08	13/32"	11	20.5	6.5	27	27	
BF1-0810R	1/2" - 14	08	10	1/2"	12	21	6.5	27	31	
BF1-1212R	3/4" - 14	12	12	5/8"	16	21.5	8.7	32	37	
BF1-1616R	1" - 11	16	16	7/8"	22	28	10.5	38	43	
BF1-2020R	1.1/4" - 11	20	20	1.1/8"	28	36.4	10	50	49	
BF1-2424R	1.1/2" - 11	24	24	1.3/8"	35	36.3	12	55	54	
BF1-3232R	2" - 11	32	32	1.13/16"	46	39	16	70	65	

BF4


BSPP FEMALE 45° ELBOW

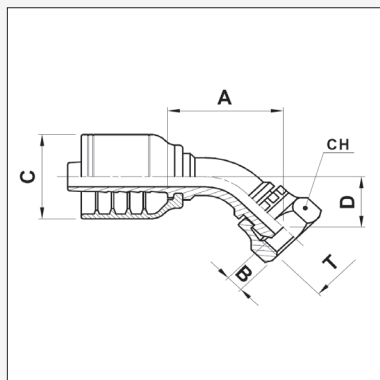

Product Code	BSPP Thread		Nominal ID			Dimensions mm				
	T	Size	Dash	Inch	DN	A	B	CH	C	D
BF4-0606R	3/8" - 19	06	06	5/16"	08	42.5	6	22	24	19

BF9

BSPP FEMALE 90° ELBOW

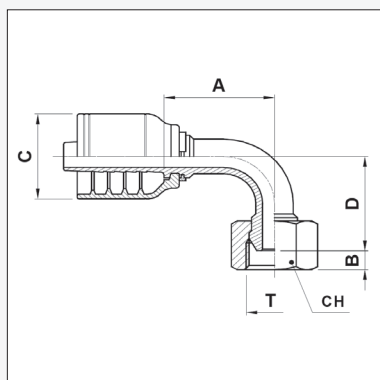

Product Code	BSPP Thread		Nominal ID			Dimensions mm				
	T	Size	Dash	Inch	DN	A	B	CH	C	D
BF9-0404R	1/4" - 19	04	04	3/16"	4	27.5	4.2	19	21	27
BF9-0604R	3/8" - 19	06	04	3/16"	4	27.5	6	22	21	29.5
BF9-0606R	3/8" - 19	06	06	5/16"	08	32.5	6	22	24	30
BF9-0806R	1/2" - 14	08	06	5/16"	08	32.5	6.5	27	24	32
BF9-0808R	1/2" - 14	08	08	13/32"	11	39	6.5	27	27	36.5
BF9-1010R	5/8" - 14	10	10	1/2"	12	46.5	9.5	27	31	49
BF9-1212R	3/4" - 14	12	12	5/8"	16	62.5	8.7	32	37	58.8
BF9-1616R	1" - 11	16	16	7/8"	22	73	10.5	38	43	71
BF9-2020R	1.1/4" - 11	20	20	1.1/8"	28	91.5	10	50	49	83
BF9-2424R	1.1/2" - 11	24	24	1.3/8"	35	114	12	55	54	108
BF9-3232R	2" - 11	32	32	1.13/16"	46	130	16	70	65	128


BSP

ORIGIN: GREAT BRITAIN



BTM1

BSPT MALE STRAIGHT

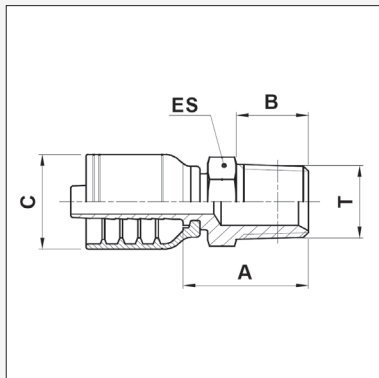


Product Code	BSPT Thread		Nominal ID			Dimensions mm			
	T	Size	Dash	Inch	DN	A	B	C	ES
BTM1-0405R	1/4" - 19	04	05	1/4"	6	26.5	14	22	14
BTM1-0606R	3/8" - 19	06	06	5/16"	08	29	15	24	19
BTM1-0808R	1/2" - 14	08	08	13/32"	11	32	18	27	22
BTM1-0810R	1/2" - 14	08	10	1/2"	12	32.5	18	31	22
BTM1-1212R	3/4" - 14	12	12	5/8"	16	42	20	37	27
BTM1-1616R	1" - 11	16	16	7/8"	22	48.1	23	43	36



JF1

JIC FEMALE STRAIGHT

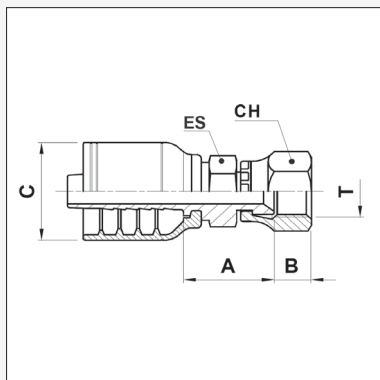


Product Code	JIC Thread			Hose Bore			Dimensions (mm)				
	Thread	Size	Tube	Dash	Inch	DN	A	B	CH	ES	C
JF1-0704R	7/16" - 20	07	04	04	3/16"	4	19.5	8.5	15	11.1	21
JF1-0805R	1/2" - 20	08	05	05	1/4"	5	18.5	10.7	19	24	23
JF1-1205R	3/4" - 16	12	08	05	1/4"	5	24.4	10.2	24	na	23
JF1-0906R	9/16" - 18	09	06	06	5/16"	08	21	9.5	19	14	24
JF1-1206R	3/4" - 16	12	08	06	5/16"	08	25.9	10.7	24	19	24
JF1-1208R	3/4" - 16	12	08	08	13/32"	11	18.5	10.7	24	19	27
JF1-1210R	3/4" - 16	12	08	10	1/2"	12	25.4	10.7	24	19	31
JF1-1410R	7/8" - 14	14	10	10	1/2"	12	20.5	12.5	27	27	31
JF1-1710R	1.1/16" - 12	17	12	10	1/2"	12	35.5	13.8	32	27	31
JF1-1712R †	1.1/16" - 12	17	12	12	5/8"	16	35.5	13.8	32	27	37
JF1-2116R †	1.5/16" - 12	21	16	16	7/8"	22	37	16	38	32	43
JF1-2620R †	1.5/8" - 12	26	20	20	1.1/8"	28	50.1	16	50	41	49
JF1-3024R †	1.7/8" - 12	30	24	24	1.3/8"	35	53.4	18.5	55	50	54
JF1-4032R †	2.1/2" - 12	40	32	32	1.13/16"	48	70	24	75	65	65

† Thrust wired nut

JF4

JIC FEMALE 45° ELBOW

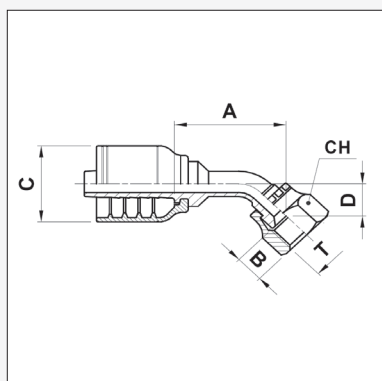

Product Code	JIC Thread			Hose Bore			Dimensions (mm)				
	Thread	Size	Tube	Dash	Inch	DN	A	B	CH	D	C
JF4-0704R	7/16" - 20	07	04	04	3/16"	4		8.5	15		21
JF4-0804R	1/2" - 20	08	05	04	3/16"	4		10.5	17		21
JF4-0904R	9/16" - 18	08	05	04	3/16"	4		9.5	19		21
JF4-0906R	9/16" - 18	09	06	06	5/16"	08	42.5	9.5	19	11.5	24
JF4-1206R	3/4" - 16	12	08	06	5/16"	08		10.7	24		24
JF4-1208R	3/4" - 16	12	08	08	13/32"	11	44	10.7	24	14.5	27
JF4-1408R	7/8" - 14	14	10	08	13/32"	11		12.5	27		27
JF4-1410R	7/8" - 14	14	10	10	1/2"	12	55.5	12.5	27		31
JF4-1710R	1.1/16" - 12	17	12	10	1/2"	12		13.8	32		31
JF4-1712R †	1.1/16" - 12	17	12	12	5/8"	16	60.5	13.8	32	29	37
JF4-2112R †	1.5/16" - 12	21	16	12	5/8"	16		16	38		37
JF4-2116R †	1.5/16" - 12	21	16	16	7/8"	22	77.5	16	38	42	43
JF4-2620R †	1.5/8" - 12	26	20	20	1.1/8"	28		16	50		49
JF4-3024R †	1.7/8" - 12	30	24	24	1.3/8"	35		18.5	55		54
JF4-4032R †	2.1/2" - 12	40	32	32	1.13/16"	46		24	75		65

† Thrust wired nut


JIC FITTINGS

ORIGIN: NORTH AMERICA



JF9


JIC FEMALE 90° ELBOW

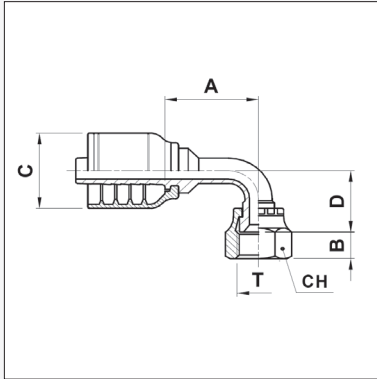


Product Code	JIC Thread			Hose Bore			Dimensions (mm)				
	Thread	Size	Tube	Dash	Inch	DN	A	B	CH	D	C
JF9-0704R	7/16" - 20	07	04	04	3/16"	5	24	8.5	15	29	21
JF9-0804R	1/2" - 20	08	05	04	3/16"	5	32	10.5	17	29	21
JF9-0805R	1/2" - 20	08	05	05	1/4"	6	26.5	10.5	17	29	21
JF9-0906R	9/16" - 18	09	06	06	5/16"	08	30	9.5	19	22	24
JF9-1208R	3/4" - 16	12	08	08	13/32"	11	31.5	10.7	24	30	27
JF9-1210R	3/4" - 16	12	08	10	1/2"	12	41	10.7	24	30	31
JF9-1410R	7/8" - 14	14	10	10	1/2"	12	42.5	12.5	27	40	31
JF9-1712R	1.1/16" - 12	17	12	12	5/8"	16	48.5	13.8	32	47.5	37
JF9-2116R	1.5/16" - 12	21	16	16	7/8"	22	76	16	38	77	43
JF9-2116R-060	1.5/16" - 12	21	16	16	7/8"	22	63	16.5	38	60	43
JF9-2620R	1.5/8" - 12	26	20	20	1.1/8"	28	79	16	50	79.5	49
JF9-3024R	1.7/8" - 12	30	24	24	1.1/2"	38	107	18.5	55	103.7	54
JF9-4032R	2.1/2" - 12	40	32	32	1.13/16"	46	136	24	75	140	65

JFL9

JIC FEMALE LONG DROP 90° ELBOW

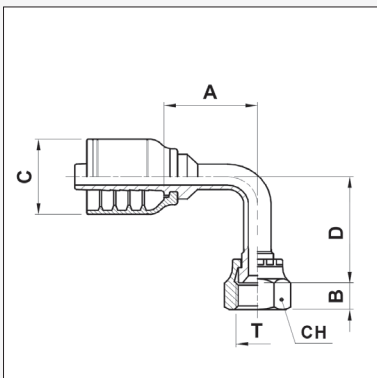


Product Code	JIC Thread			Hose Bore			Dimensions (mm)				
	Thread	Size	Tube	Dash	Inch	DN	A	B	CH	D	C
JFL9-0906R	9/16" - 18	09	06	06	5/16"	08	35.5	9.5	19	56	24
JFL9-1712R	1.1/16" - 12	17	12	12	5/8"	16	55.5	13.8	32	95	37

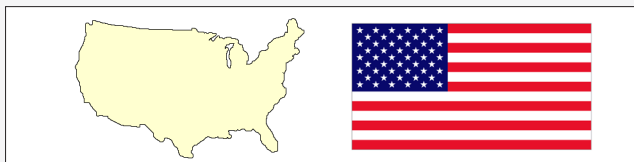

SF1


SAE FEMALE STRAIGHT

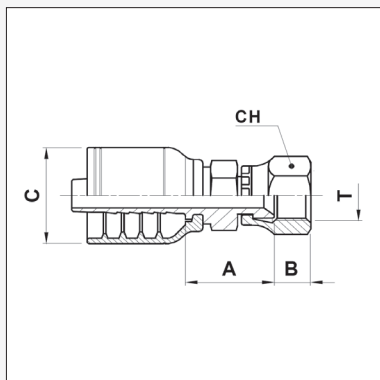

Product Code	SAE Thread			Hose Bore			Dimensions (mm)				
	Thread	Size	Tube	Dash	Inch	DN	A	B	CH	ES	C
SF1-1006R	5/8" - 18	10	06	06	5/16"	08	23.9	10.8	22	19	24
SF1-1712R	1.1/16" - 14	17	12	12	5/8"	16	30.7	14.4	32	27	37

NM1

NPT MALE STRAIGHT

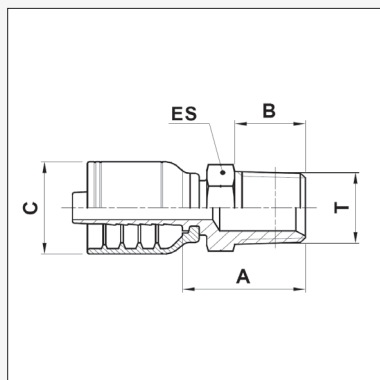

Product Code	NPT Thread		Nominal ID			Dimensions mm				
	T	Size	Dash	Inch	DN	A	B	ES	C	
NM1-0404R	1/4" - 18	04	04	3/16"	5	25.8	14	14	21	
NM1-0606R	3/8" - 18	06	06	5/16"	08	28	14	19	24	
NM1-0808R	1/2" - 14	08	08	13/32"	11	33	19	22	27	
NM1-1212R	3/4" - 14	12	12	5/8"	16	41	19	27	37	
NM1-1616R	1" - 11½	16	16	7/8"	22	47.5	24	36	43	


ORFS FITTINGS

ORIGIN: NORTH AMERICA



OF1


O-RING FACE SEAL FEMALE STRAIGHT

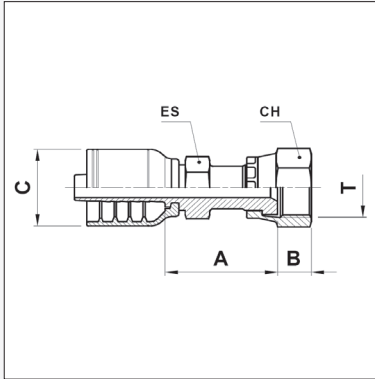

Product Code	UN Thread			Hose Bore			Dimensions (mm)				
	Thread	Size	Tube	Dash	Inch	DN	A	B	CH	ES	C
OF1-0404R	9/16" - 18	04	04	04	3/16"	4	27.3	8	17	14	21
OF1-0606R	11/16" - 16	06	06	06	5/16"	08	32	9.5	22	17	24
OF1-0806R	13/16" - 16	08	08	06	5/16"	08	36.5	11	24	19	24
OF1-0808R	13/16" - 16	08	08	08	13/32"	11	36.5	11	24	19	27
OF1-0810R	13/16"-16	08	08	10	1/2"	12	37	11	24	19	31
OF1-1010R	1" - 14	10	10	10	1/2"	12	39	13.5	30	24	31
OF1-1212R	1.3/16" - 12	12	12	12	5/8"	16	44	14.5	36	30	37
OF1-1616R	1.7/16" - 12	16	16	16	7/8"	22	52.5	14.8	41	36	43

OF4


O-RING FACE SEAL FEMALE 45° ELBOW

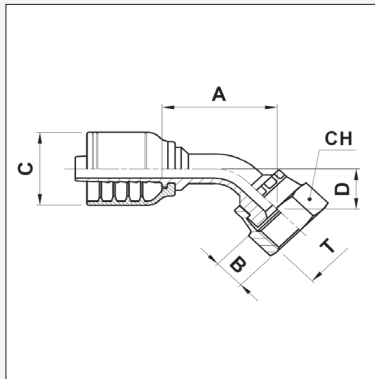

Product Code	UN Thread			Hose Bore			Dimensions (mm)				
	Thread	Size	Tube	Dash	Inch	DN	A	B	CH	D	C
OF4-0404R	9/16" - 18	04	04	04	3/16"	4	43.5	8	17	11	21
OF4-0606R	11/16" - 16	06	06	06	5/16"	08	38	9.5	22	15	24
OF4-0808R	13/16" - 16	08	08	08	13/32"	11	43.5	11	24	15	27
OF4-0810R	13/16"-16	08	08	10	1/2"	12	43	11	24	14.3	31
OF4-1212R	1.3/16" - 12	12	12	12	5/8"	16	63	14.5	36	24	37
OF4-1616R	1.7/16" - 12	16	16	16	7/8"	22	82.5	14.8	41	31	43

OF9

O-RING FACE SEAL FEMALE 90° ELBOW

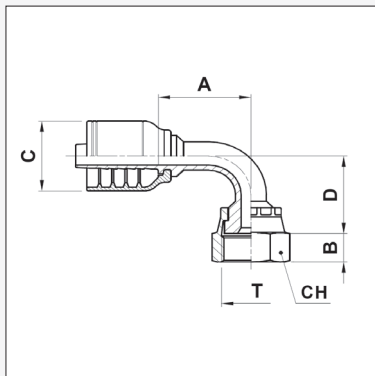


Product Code	UN Thread			Hose Bore			Dimensions (mm)				
	Thread	Size	Tube	Dash	Inch	DN	A	B	CH	D	C
OF9-0404R	9/16" - 18	04	04	04	3/16"	4	29.5	8	17	25	21
OF9-0606R	11/16" - 16	06	06	06	5/16"	08	34	9.5	22	27	24
OF9-0808R	13/16" - 16	08	08	08	13/32"	11	33	11	24	30	27
OF9-0810R	13/16"-16	08	08	10	1/2"	12	29.5	11	24	44.5	31
OF9-1010R	1" - 14	10	10	10	1/2"	12	44	13.5	30	40	31
OF9-1212R	1.3/16" - 12	12	12	12	5/8"	16	56.5	14.5	36	51.5	37
OF9-1616R	1.7/16" - 12	16	16	16	7/8"	22	71.5	14.8	41	71	43



BF1

BSP FEMALE STRAIGHT PUSH FIT

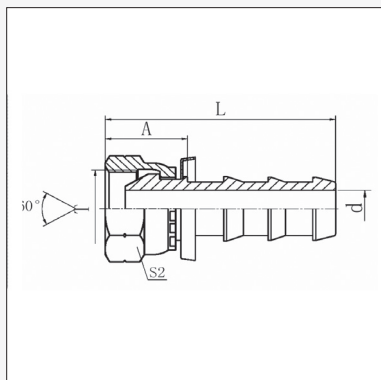


Product Code	BSPP Thread			Hose Bore			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	L	C	S1	S2
BF1-0204P	1/8" - 28	02	1/8"	6	1/4"	04		4.3		
BF1-0404P	1/4" - 19	04	1/4"	6	1/4"	04	19.5	4.3	37.5	19
BF1-0406P	1/4" - 19	04	1/4"	10	3/8"	06	19.5	7.6		19
BF1-0606P	3/8" - 19	06	3/8"	10	3/8"	06	21.5	7.6	43.0	22
BF1-0806P	1/2" - 14	08	1/2"	10	3/8"	06	24.5	7.6		27
BF1-0608P	3/8" - 19	06	3/8"	12	1/2"	08	21.5	9.9		22
BF1-0808P	1/2" - 14	08	1/2"	12	1/2"	08	24.5	9.9	50	27
BF1-0810P	1/2" - 14	08	1/2"	16	5/8"	10	24.5			27
BF1-1212P	3/4" - 14	12	3/4"	20	3/4"	12	29.0	15.5	67.5	32
BF1-1616P	1" - 11	16	1"	25	1"	16				

* Available in Stainless Steel, add SS to part number eg BF1SS-0404P

BFC9


BSP FEMALE PUSH FIT 90° COMPACT ELBOW

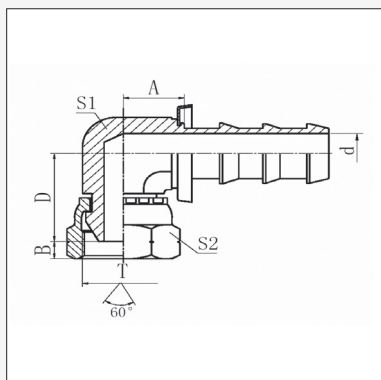

Product Code	BSPP Thread			Hose Bore			Dimensions mm					
	T	Size	Pipe	DN	Inch	Size	A	B	D	S1	S2	d
BFC9-0404P	1/4" - 19	04	1/4"	6	1/4"	04	12.0	5.5	18.5	11	19	4.3
BFC9-0606P	3/8" - 19	06	3/8"	10	3/8"	06	14.0	6.3	24.0	14	22	7.6
BFC9-0808P	1/2" - 14	08	1/2"	12	1/2"	08	17.0	7.5	26.5	19	27	9.9
BFC9-1212P	3/4" - 14	12	3/4"	20	3/4"	12	21.5	10.9	33.0	27	32	15.5

BPM1


BSP MALE STRAIGHT PUSH FIT

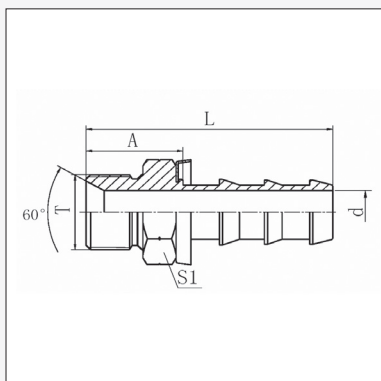

Product Code	BSPP Thread			Hose Bore			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	L	S1	d
BPM1-0808P	1/2" - 14	08	1/2"	12	1/2"	08	28.5	54	27	9.9

BSP

ORIGIN: GREAT BRITAIN

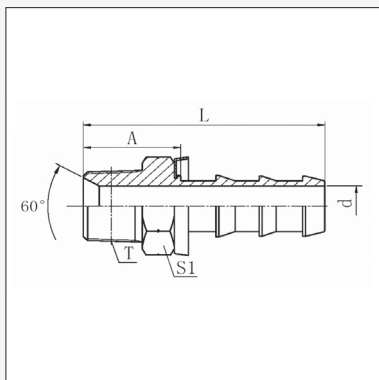**BTM1**BSPT MALE STRAIGHT
PUSH FIT

Product Code	BSPT Thread			Hose Bore			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	L	S1	d
BTM1-0204P	1/8" - 28	02	1/8"	6	1/4"	04	17.7	37.5	12	4.5
BTM1-0404P	1/4" - 19	04	1/4"	6	1/4"	04	20.5	40.5	14	4.3
BTM1-0406P	1/4" - 19	04	1/4"	10	3/8"	06	22	44	17	7.5
BTM1-0606P	3/8" - 19	06	3/8"	10	3/8"	06	23.5	49	19	7.5
BTM1-0806P	1/2" - 14	08	1/2"	10	3/8"	06				
BTM1-0608P	3/8" - 19	06	3/8"	12	1/2"	08				
BTM1-0808P	1/2" - 14	08	1/2"	12	1/2"	08	30.5	56	22	9.9
BTM1-0810P	1/2" - 14	08	1/2"	16	5/8"	10				
BTM1-1212P	3/4" - 14	12	3/4"	20	3/4"	12	29.4	68	30	15.5

NPT


ORIGIN: NORTH AMERICA



P SERIES

NM1

NPT MALE STRAIGHT
PUSH FIT

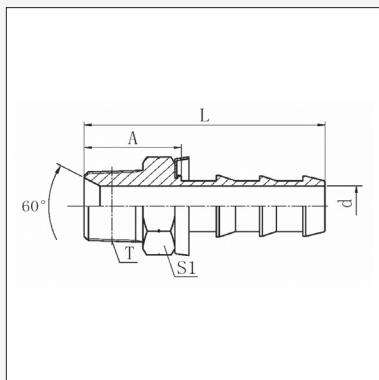

Product Code	NPT Thread			Hose Bore			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	L	S1	d
NM1-0204P	1/8" - 27	02	1/8"	6	1/4"	04	16.5	35.6	11	4.3
NM1-0404P	1/4" - 18	04	1/4"	6	1/4"	04	21.1	40.1	14	4.3
NM1-0406P	1/4" - 18	04	1/4"	10	3/8"	06	22.6	44.7	14	7.6
NM1-0606P	3/8" - 18	06	3/8"	10	3/8"	06	22.6	44.7	19	7.6
NM1-0608P	3/8" - 18	06	3/8"	12	1/2"	08	22.6	48.5	19	9.9
NM1-0808P	1/2" - 14	08	1/2"	12	1/2"	08	29	54.9	22	9.9
NM1-1212P	3/4" - 14	12	3/4"	20	3/4"	12	30.7	69	27	15.5


NPT FITTINGS

JIC

ORIGIN: NORTH AMERICA




JF1

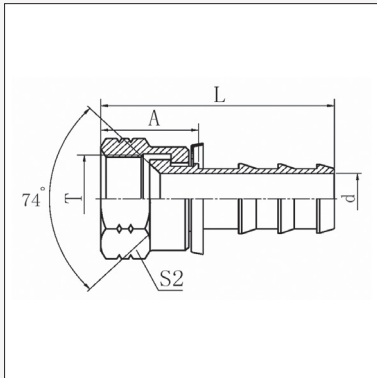JIC FEMALE STRAIGHT
PUSH FIT

Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	L	S2	d
JF1-0704P	7/16" - 20	07	04	6	1/4"	04	20	38	15	4.3
JF1-0804P	1/2" - 20	08	05	6	1/4"	04	21	39	17	4.3
JF1-0904P	9/16" - 18	09	06	6	1/4"	04				4.3
JF1-0906P	9/16" - 18	09	06	10	3/8"	06	22	43.5	19	7.6
JF1-1206P	3/4" - 16	12	08	10	3/8"	06	25	46.5	24	7.6
JF1-1208P	3/4" - 16	12	08	12	1/2"	08	25	50.5	24	9.9
JF1-1408P	7/8" - 14	14	10	12	1/2"	08	27	52.5	27	9.9
JF1-1410P	7/8" - 14	14	10	16	5/8"	10				
JF1-1710P	1.1/16" - 12	17	12	16	5/8"	10				
JF1-1712P	1.1/16" - 12	17	12	20	3/4"	12	31	69.5	32	15.5
JF1-2116P	1.5/16" - 12	21	16	25	1"	16				


Add BR for Brass version or SS for stainless steel Example: JF1BR-0704P

JFC9

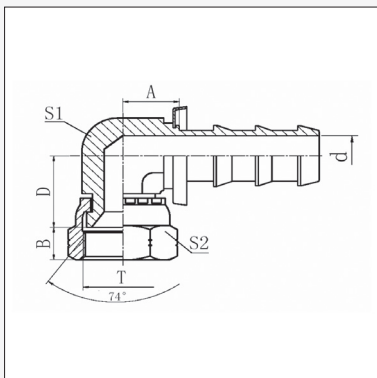JIC FEMALE 90° COMPACT ELBOW
PUSH FIT

Product Code	JIC Thread			Hose Bore			Dimensions (mm)				
	Thread	Size	Tube	DN	Inch	Size	A	B	D	S1	S2
JFC9-0704P	7/16" - 20	07	04	6	1/4"	04	12	9	18	11	17
JFC9-0804P	1/2" - 20	08	05	6	1/4"	04					
JFC9-0904P	9/16" - 18	09	06	6	1/4"	04	14	10.5	21	14	19
JFC9-0906P	9/16" - 18	09	06	10	3/8"	06	15.5	10.5	21	16	19
JFC9-1206P	3/4" - 16	12	08	10	3/8"	06	15.5	11	25	16	24
JFC9-1208P	3/4" - 16	12	08	12	1/2"	08	17	11	25	19	24
JFC9-1408P	7/8" - 14	14	10	12	1/2"	08					
JFC9-1410P	7/8" - 14	14	10	16	5/8"	10	18.5	12	27.5	22	27
JFC9-1712P	1.1/16" - 12	17	12	20	3/4"	12	21.5	15	30	27	32

JF9

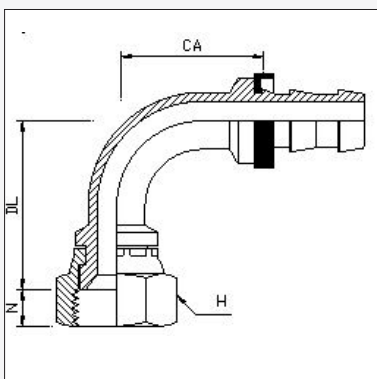
JIC FEMALE 90° ELBOW
PUSH FIT

Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	H	DL	CA	N
JF9-0704P	7/16" - 20	07	04	6	1/4"	04	14.3	29	29	9
JF9-0906P	9/16" - 18	09	06	10	3/8"	06	17.5	35	28	10
JF9-1206P	3/4" - 16	12	08	10	3/8"	06	22.2	38	32	11
JF9-1208P	3/4" - 16	12	08	12	1/2"	08	22.2	44	39	11
JF9-1410P	7/8" - 14	14	10	16	5/8"	10	25.4	53	50	13
JF9-1712P	1.1/16" - 12	17	12	20	3/4"	12	32	58	54	14

* Available in Stainless Steel, add SS to part number eg. JF9SS-0704P



JM1
JIC MALE STRAIGHT
PUSH FIT

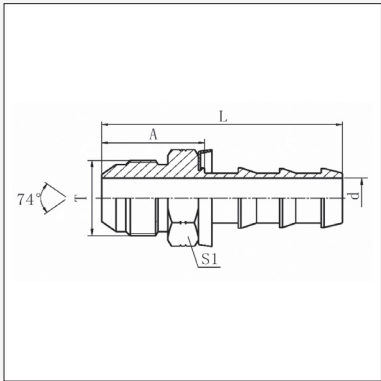


Product Code	JIC Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	L	S1	d
JM1-0704P	7/16" - 20	07	04	6	1/4"	04	22	40	12	4.3
JM1-0804P	1/2" - 20	08	05	6	1/4"	04				
JM1-0904P	9/16" - 18	09	06	6	1/4"	04	22	40	17	4.3
JM1-0906P	9/16" - 18	09	06	10	3/8"	06	22	40	17	7.5
JM1-1206P	3/4" - 16	12	08	10	3/8"	06	27.2	48.4	22	7.5
JM1-1208P	3/4" - 16	12	08	12	1/2"	08	27.2	52.7	22	9.9
JM1-1408P	7/8" - 14	14	10	12	1/2"	08				
JM1-1410P	7/8" - 14	14	10	16	5/8"	10	30	69	24	12.2
JM1-1712P	1.1/16" - 12	17	12	20	3/4"	12	33.4	72	30	15.5

SAE

ORIGIN: NORTH AMERICA




SF1

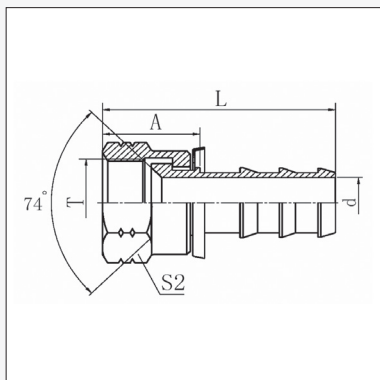SAE FEMALE STRAIGHT
PUSH FIT


Product Code	SAE Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	L	S2	d
SF1-1004P	5/8" - 18	10	06	6	1/4"	04	25	44.8	22	4.3
SF1-1006P	5/8" - 18	10	06	10	3/8"	06	20.6	42.4	22	7.6
SF1-1408P	7/8" - 14	14	08	12	1/2"	08	27	52.9	27	9.9
SF1-1712P	1.1/16" - 14	17	12	20	3/4"	12	30.2	68.8	32	15.5

SFC9

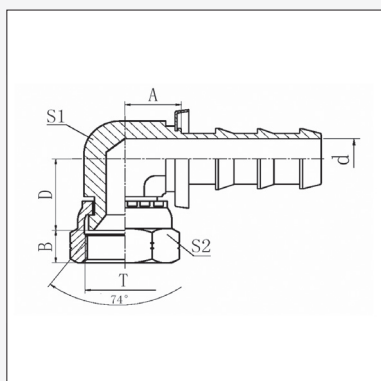SAE FEMALE 90° COMPACT ELBOW
PUSH FIT

Product Code	SAE Thread			Hose Bore			Dimensions (mm)				
	Thread	Size	Tube	DN	Inch	Size	A	B	D	S1	S2
SFC9-1006P	5/8" - 18	10	06	10	3/8"	06				22	7.6

SM1

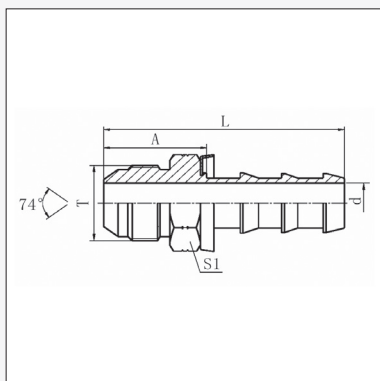SAE MALE STRAIGHT
PUSH FIT

Product Code	SAE Thread			Hose Bore			Dimensions (mm)			
	Thread	Size	Tube	DN	Inch	Size	A	L	S1	d
SM1-1006P	9/16" - 18	10	06	10	3/8"	06	24.5	43.5	17	7.5
SM1-1712P	1.1/16" - 14	17	12	20	3/4"	12	36.8	75.4	30	15.5

MISCELLANEOUS FITTINGS


WELD ON AND HOSE JOINERS



P SERIES

WO1


WELD ON STRAIGHT TAIL PUSH FIT

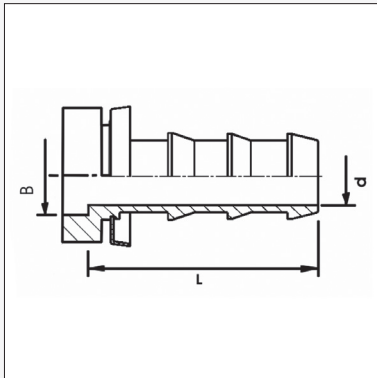

Product Code	Tube Weld			Hose Bore			Dimensions (mm)			
	Bore	Size	ø ins.	DN	Inch	Size	L	ø B	d	
WO1-0404P	04	04	1/4"	06	1/4"	04	24	6.4	4.3	
WO1-0606P	06	06	3/8"	10	3/8"	06	26.2	9.8	7.6	
WO1-0808P	08	08	1/2"	12	1/2"	08	30.5	12.9	9.9	
WO1-1010P	10	10	5/8"	16	5/8"	10	44	16	12.2	
WO1-1212P	12	12	3/4"	20	3/4"	12	43.6	19.2	15.5	

HJ1

HOSE JOINER PUSH FIT

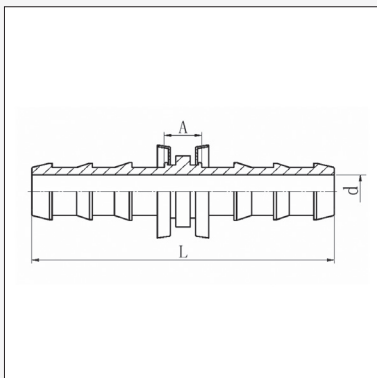

Product Code	Hose tail			Hose Tail			Dimensions (mm)			
	DN	Inch	Size	DN	Inch	Size	A	L	d	
HJ1-0404P	06	1/4"	04	06	1/4"	04	8.4	48	4.3	
HJ1-0606P	10	3/8"	06	10	3/8"	06	8.4	52.4	7.6	
HJ1-0808P	12	1/2"	08	12	1/2"	08	8.4	61	9.9	
HJ1-1010P	16	5/8"	10	16	5/8"	10	9.4	88	12.2	
HJ1-1212P	20	3/4"	12	20	3/4"	12	10	87.2	15.5	

MISCELLANEOUS

FERRULES


ORIGIN: N/A



RN1 / RN2 FERRULES

FOR FIELD ATTACHABLE FITTINGS (F Series Hose Tails)

TO SUIT R1AT AND R2AT NON-SKIVE HOSES - ORDERED SEPARATELY

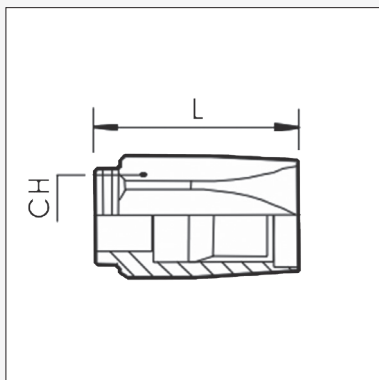


Product Code	To Suit Hose	Hose Bore			Dimension (mm)	
		DN	Inch	Size	L	CH
RN1-04	R1AT-04	06	1/4"	04	40.5	20.5
RN1-06	R1AT-06	10	3/8"	06	46.2	23.9
RN1-08	R1AT-08	12	1/2"	08	47.7	26.9
RN1-12	R1AT-12	20	3/4"	12	60.5	34.8
RN1-16	R1AT-16	25	1"	16	71.4	42.5
RN2-04	R2AT-04	06	1/4"	04	40.5	22.0
RN2-06	R2AT-06	10	3/8"	06	46.2	25.3
RN2-08	R2AT-08	12	1/2"	08	47.7	28.4
RN2-12	R2AT-12	20	3/4"	12	60.5	35.0
RN2-16	R2AT-16	25	1"	16	71.4	45.7



BF1


BSPP FEMALE STRAIGHT
(FERRULE ORDERED SEPARATELY)

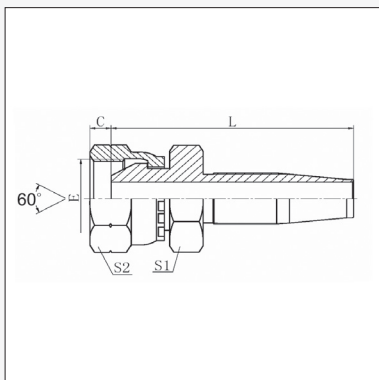

Product Code	BSPP Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	B	CH	
BF1-0404F	1/4" - 19	04	1/4"	6	1/4"	04		4	19	
BF1-0604F	3/8" - 19	06	3/8"	6	1/4"	04		6	22	
BF1-0606F	3/8" - 19	06	3/8"	10	3/8"	06		6	22	
BF1-0806F	1/2" - 14	08	1/2"	10	3/8"	06		7	27	
BF1-0808F	1/2" - 14	08	1/2"	12	1/2"	08		7	27	
BF1-1212F	3/4" - 14	12	3/4"	20	3/4"	12		9	32	
BF1-1616F	1" - 11	16	1"	25	1"	16		10.5	38	

BTM1

BSPT MALE STRAIGHT
(FERRULE ORDERED SEPARATELY)

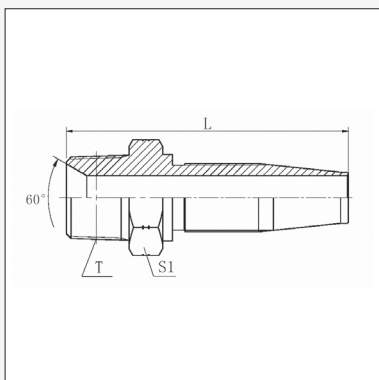

Product Code	BSPT Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	L	S1		
BTM1-0404F	1/4" - 19	04	1/4"	6	1/4"	04	26.5	14	17	
BTM1-0604F	3/8" - 19	06	3/8"	6	1/4"	04	27	14	19	
BTM1-0606F	3/8" - 19	06	3/8"	10	3/8"	06	29	15	19	
BTM1-0806F	1/2" - 14	08	1/2"	10	3/8"	06	32	18	22	
BTM1-0808F	1/2" - 14	08	1/2"	12	1/2"	08	32.5	18	22	
BTM1-1212F	3/4" - 14	12	3/4"	20	3/4"	12	39	20	27	
BTM1-1616F	1" - 11	16	1"	25	1"	16	48.1	23	36	


BSP

ORIGIN: GREAT BRITAIN



BF4


BSPP FEMALE 45° ELBOW
(FERRULE ORDERED SEPARATELY)

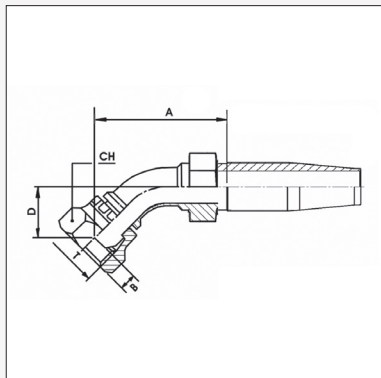

Product Code	BSPP Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	B	CH	D
BF4-0404F	1/4" - 19	04	1/4"	6	1/4"	04		4	19	
BF4-0606F	3/8" - 19	06	3/8"	10	3/8"	06		6	22	
BF4-0808F	1/2" - 14	08	1/2"	12	1/2"	08		7	27	
BF4-1010F	5/8" - 14	10	5/8"	16	5/8"	10		10		
BF4-1212F	3/4" - 14	12	3/4"	20	3/4"	12		9	32	
BF4-1616F	1" - 11	16	1"	25	1"	16		10.5	38	

BF9


BSPP FEMALE 90° ELBOW
(FERRULE ORDERED SEPARATELY)

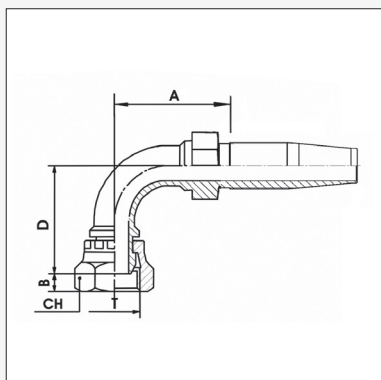

Product Code	BSPP Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	B	CH	D
BF9-0404F	1/4" - 19	04	1/4"	6	1/4"	04		4	19	
BF9-0606F	3/8" - 19	06	3/8"	10	3/8"	06		6	22	
BF9-0808F	1/2" - 14	08	1/2"	12	1/2"	08		7	27	
BF9-1212F	3/4" - 14	12	3/4"	20	3/4"	12		9	32	
BF9-1616F	1" - 11	16	1"	25	1"	16		10.5	38	

BFC9

BSPP FEMALE 90° COMPACT ELBOW
(FERRULE ORDERED SEPARATELY)

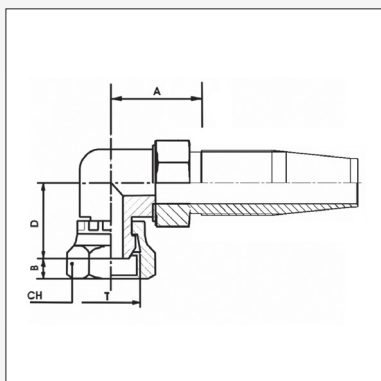


Product Code	BSPP Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	B	CH	D
BFC9-0404F	1/4" - 19	04	1/4"	6	1/4"	04		4	19	
BFC9-0606F	3/8" - 19	06	3/8"	10	3/8"	06		6	22	
BFC9-0806F	1/2" - 14	08	1/2"	10	3/8"	06		7	27	
BFC9-0808F	1/2" - 14	08	1/2"	12	1/2"	08		7	27	
BFC9-1212F	3/4" - 14	12	3/4"	20	3/4"	12		9	32	



JF1


JIC FEMALE STRAIGHT
(FERRULE ORDERED SEPARATELY)

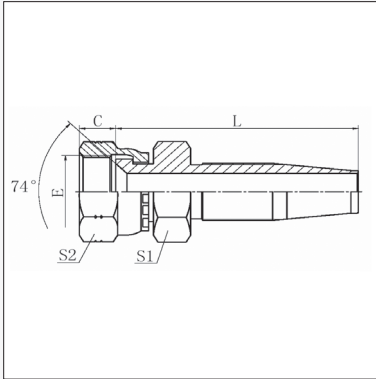

Product Code	JIC Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	B	CH	
JF1-0704F	7/16" - 20	07	04	6	1/4"	04		8.5	15	
JF1-0804F	1/2" - 20	08	05	6	1/4"	04		9.5	17	
JF1-0904F	9/16" - 18	09	06	6	1/4"	04		9.5	19	
JF1-0906F	9/16" - 18	09	06	10	3/8"	06		9.5	19	
JF1-1206F	3/4" - 16	12	08	10	3/8"	06		10.7	24	
JF1-1208F	3/4" - 16	12	08	12	1/2"	08		10.7	24	
JF1-1408F	7/8" - 14	14	10	12	1/2"	08		12.7	27	
JF1-1410F	7/8" - 14	14	10	16	5/8"	10		12.7	27	
JF1-1710F	1.1/16" - 12	17	12	16	5/8"	10		13.5	32	
JF1-1712F	1.1/16" - 12	17	12	20	3/4"	12		13.5	27	
JF1-2112F	1.5/16" - 12	21	16	20	3/4"	12		16	32	
JF1-2116F	1.5/16" - 12	21	16	25	1"	16		16	32	

JM1


JIC MALE STRAIGHT
(FERRULE ORDERED SEPARATELY)

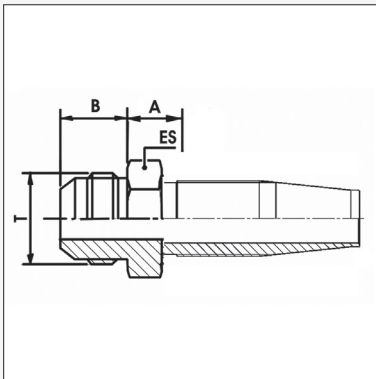

Product Code	JIC Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	B	ES	
JM1-0704F	7/16" - 20	07	04	6	1/4"	04	26.5	14	14	
JM1-0904F	9/16" - 18	09	06	6	1/4"	04	27.5	14	17	
JM1-0906F	9/16" - 18	09	06	10	3/8"	06	29.5	14	17	
JM1-1206F	3/4" - 16	12	08	10	3/8"	06	33.2	16.7	19	
JM1-1208F	3/4" - 16	12	08	12	1/2"	08	34	16.7	19	
JM1-1408F	7/8" - 14	14	10	12	1/2"	08	34	19.3	24	
JM1-1708F	1.1/16" - 12	17	12	12	1/2"	08	38.9	28.9	27	
JM1-1710F	1.1/16" - 12	17	12	16	5/8"	10	38.9	21.9	27	
JM1-1712F	1.1/16" - 12	17	12	20	3/4"	12	38.5	21.5	27	
JM1-1912F	1.3/16" - 12	19	14	20	3/4"	12	46.6	22.6	32	
JM1-2112F	1.5/16" - 12	21	16	20	3/4"	12	47.1	23.1	36	
JM1-2116F	1.5/16" - 12	21	16	25	1"	16	48.2	23.1	36	

JMF1

JIS METRIC FEMALE STRAIGHT - 60° SEAT
(FERRULE ORDERED SEPARATELY)

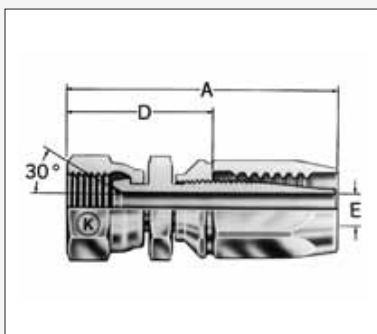

Product Code	JIS Thread			Nominal ID			Dimensions mm			
	T (mm)	Size	Pipe	DN	Inch	Size	A	D	CH	ES
JMF1-1404F	14 x 1.5	14	6 mm	6	1/4"	04	69.4	39.0	18.9	18.9

JIC


ORIGIN: NORTH AMERICA



JF4

JIC FEMALE 45° ELBOW


(FERRULE ORDERED SEPARATELY)

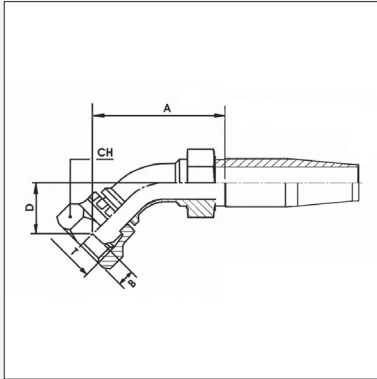

Product Code	JIC Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	B	CH	D
JF4-0704F	7/16" - 20	07	04	6	1/4"	04		8.5		15
JF4-0804F	1/2" - 20	08	05	6	1/4"	04		9.5		17
JF4-0904F	9/16" - 18	09	06	6	1/4"	04		9.5		19
JF4-0906F	9/16" - 18	09	06	10	3/8"	06		9.5		19
JF4-1206F	3/4" - 16	12	08	10	3/8"	06		10.7		24
JF4-1208F	3/4" - 16	12	08	12	1/2"	08		10.7		24
JF4-1408F	7/8" - 14	14	10	12	1/2"	08		12.7		27
JF4-1712F	1.1/16" - 12	17	12	20	3/4"	12		13.5		32
JF4-2112F	1.5/16" - 12	21	16	20	3/4"	12		16		38
JF4-2116F	1.5/16" - 12	21	16	25	1"	16		16		38

JF9 and JFL9 (Long Drop)

JIC FEMALE 90° ELBOW (FERRULE ORDERED SEPARATELY)

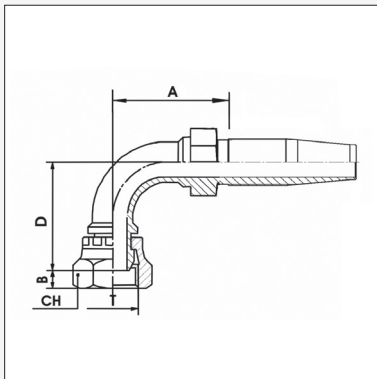


Product Code	JIC Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	B	CH	D
JF9-0704F	7/16" - 20	07	04	6	1/4"	04		8.5		15
JF9-0804F	1/2" - 20	08	05	6	1/4"	04		9.5		17
JF9-0904F	9/16" - 18	09	06	6	1/4"	04		9.5		19
JF9-0906F	9/16" - 18	09	06	10	3/8"	06		9.5		19
JF9-1206F	3/4" - 16	12	08	10	3/8"	06		10.7		24
JF9-1208F	3/4" - 16	12	08	12	1/2"	08		10.7		24
JF9-1408F	7/8" - 14	14	10	12	1/2"	08		12.7		27
JF9-1410F	7/8" - 14	14		16	5/8"	10		12.7		27
JF9-1712F	1.1/16" - 12	17	12	20	3/4"	12		13.5		32
JF9-2116F	1.5/16" - 12	21	16	25	1"	16		16		38
Long Drops										
JFL9-0904F	9/16" - 18	09	06	6	1/4"	04		9.5		
JFL9-0906F	9/16" - 18	09	06	10	3/8"	06		9.5		

JFC9

JIC FEMALE 90° COMPACT ELBOW

(FERRULE ORDERED SEPARATELY)

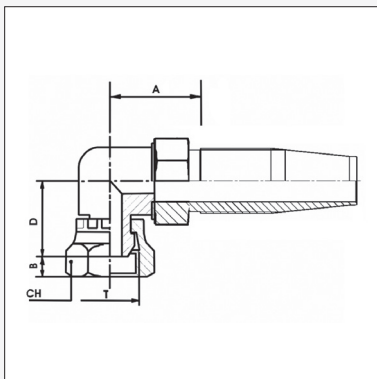


Product Code	JIC Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	B	CH	D
JFC9-0704F	7/16" - 20	07	04	6	1/4"	04		8.5		15
JFC9-0804F	1/2" - 20	08	05	6	1/4"	04		9.5		17
JFC9-0904F	9/16" - 18	09	06	6	1/4"	04		9.5		19
JFC9-1206F	3/4" - 16	12	08	10	3/8"	06		10.7		24
JFC9-1208F	3/4" - 16	12	08	12	1/2"	08		10.7		24
JFC9-1408F	7/8" - 14	14	10	12	1/2"	08		12.7		27



OF1


ORFS FEMALE STRAIGHT (FERRULE ORDERED SEPARATELY)

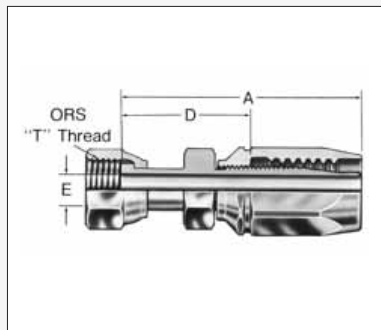

Product Code	JIC Thread			Hose Nominal ID			A	E	CH	D
	T	Size	Pipe	DN	Inch	Size				
OF1-0404F	9/16" - 18	1/4"	04	6	1/4"	04	66.5	4.5	19	33
OF1-0606F	11/16" - 16	3/8"	06	10	3/8"	06	73.0	7.3	22	38
OF1-0808F	13/16" - 16	1/2"	08	12	1/2"	08	79.0	9.8	27	43

OF9


ORFS FEMALE 90° ELBOW (FERRULE ORDERED SEPARATELY)

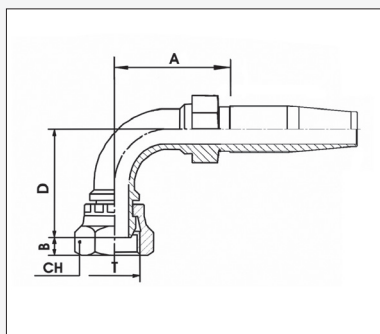

Product Code	JIC Thread			Nominal ID			Dimensions mm			
	T	Size	Pipe	DN	Inch	Size	A	B	CH	D
OF9-0404F	9/16" - 18	1/4"	04	6	1/4"	04	43	8.5	17.5	25
OF9-0606F	11/16" - 16	3/8"	06	10	3/8"	06	49	9.5	20.6	38
OF9-0808F	13/16" - 16	1/2"	08	12	1/2"	08	56	11.0	23.8	41

BPM1

BSPP MALE STRAIGHT SEPARATE CLAMP REQUIRED

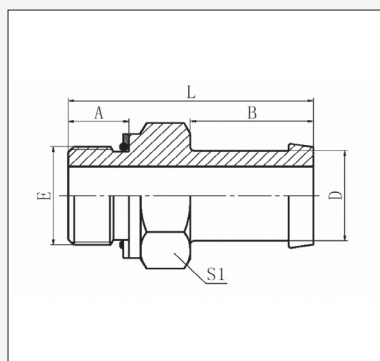

Product Code	BSPP Thread			Nominal ID			Dimensions mm			
	E	Size	Pipe	Dash	Inch	DN	A	B	L	S1
BPM1-1212L	3/4" - 14	12	3/4"	20	3/4"	12	15.5	28	57.5	32
BPM1-1216L	3/4" - 14	12	3/4"	25	1"	16	15.5	35	64.5	32
BPM1-1616L	1" - 11	16	1"	25	1"	16	18	35	69	41
BPM1-1620L	1" - 11	16	1"	32	1.1/4"	20	18	35	70.6	41
BPM1-2012L	1.1/4" - 11	20	1.1/4"	20	3/4"	12	20	28	66	50
BPM1-2016L	1.1/4" - 11	20	1.1/4"	25	1"	16	20	35	73	50
BPM1-2020L	1.1/4" - 11	20	1.1/4"	32	1.1/4"	20	20	35	73	50
BPM1-2024L	1.1/4" - 11	20	1.1/4"	38	1.1/2"	24	20	40	78	50
BPM1-2416L	1.1/2" - 11	24	1.1/2"	25	1"	16	21.5	35	74.5	55
BPM1-2420L	1.1/2" - 11	24	1.1/2"	32	1.1/4"	20	21.5	35	74.5	55
BPM1-2424L	1.1/2" - 11	24	1.1/2"	38	1.1/2"	24	22	35	75.6	55
BPM1-3232L	2" - 11	32	2"	50	2"	32	18.6	36	79	70

BSP


ORIGIN: GREAT BRITAIN



BTM1

BSPT MALE STRAIGHT

SEPARATE CLAMP REQUIRED

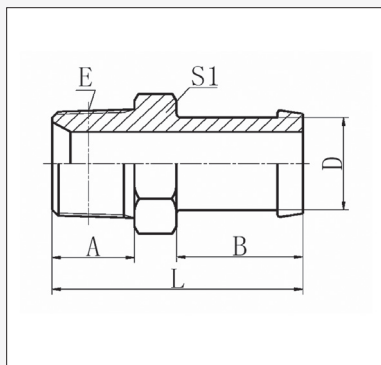


Product Code	BSPT Thread			Nominal ID			Dimensions mm			
	E	Size	Pipe	Dash	Inch	DN	A	B	L	S1
BTM1-0812L	1/2" - 14	08	1/2"	20	3/4"	12	20	28	56	22
BTM1-1212L	3/4" - 14	12	3/4"	20	3/4"	12	20	28	58	30
BTM1-1216L	3/4" - 14	12	3/4"	25	1"	16	20	35	65	30
BTM1-1220L	3/4" - 14	12	3/4"	32	1.1/4"	20	19.5	35	65.5	36
BTM1-1616L	1" - 11	16	1"	25	1"	16	25.5	35	71.5	36
BTM1-1620L	1" - 11	16	1"	32	1.1/4"	20	25.5	35	71.5	36
BTM1-1624L	1" - 11	16	1"	38	1.1/2"	24	25.5	40	76.5	50
BTM1-2016L	1.1/4" - 11	20	1.1/4"	25	1"	16	26.5	35	74.5	36
BTM1-2020L	1.1/4" - 11	20	1.1/4"	32	1.1/4"	20	26.5	35	74.5	46
BTM1-2024L	1.1/4" - 11	20	1.1/4"	38	1.1/2"	24	26.5	40	79.5	46
BTM1-2420L	1.1/2" - 11	24	1.1/2"	32	1.1/4"	20	26.5	35	76.5	50
BTM1-2424L	1.1/2" - 11	24	1.1/2"	38	1.1/2"	24	26.5	40	81.5	50
BTM1-2432L	1.1/2" - 11	24	1.1/2"	50	2"	32	26.5	35.6	76.2	55
BTM1-3232L	2" - 11	32	2"	50	2"	32	30	44.5	91.5	65
BTM1-3240L	2" - 11	32	2"	63	2.1/2"	40	30	55.6	102.6	70

BTM9

BSPT MALE 90° ELBOW

SEPARATE CLAMP REQUIRED

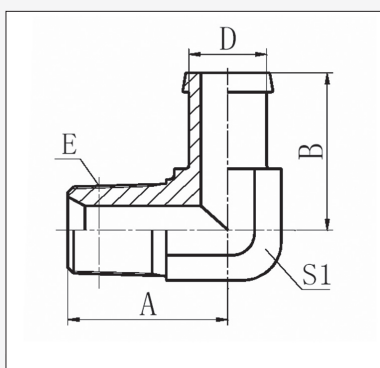


Product Code	BSPT Thread			Nominal ID			Dimensions mm			
	Thread E	Size	Pipe	Dash	Inch	DN	A	B	S1	D
BTM9-0812L	1/2" - 14	08	1/2"	20	3/4"	12	36	43	22	19
BTM9-1212L	3/4" - 14	12	3/4"	20	3/4"	12	43.5	46	27	19
BTM9-1216L	3/4" - 14	12	3/4"	25	1"	16	43.5	53	27	25.4
BTM9-1220L	3/4" - 14	12	3/4"	32	1.1/4"	20	50.3	60.6	32.9	33
BTM9-1616L	1" - 11	16	1"	25	1"	16	50	56.5	33	25.4
BTM9-1620L	1" - 11	16	1"	32	1.1/4"	20	50	56.5	33	31.8
BTM9-1624L	1" - 11	16	1"	38	1.1/2"	24	55	65	41	38.1
BTM9-2016L	1.1/4" - 11	20	1.1/4"	25	1"	16	56.5	61	41	25.4
BTM9-2020L	1.1/4" - 11	20	1.1/4"	32	1.1/4"	20	56.5	61	41	31.8
BTM9-2024L	1.1/4" - 11	20	1.1/4"	38	1.1/2"	24	56	65	41	38.1
BTM9-2424L	1.1/2" - 11	24	1.1/2"	38	1.1/2"	24	62.5	71	48	38.1
BTM9-3232L	2" - 11	32	2"	50	2"	32	68	78.5	63	50.8

BPM9

BSPP MALE 90° ELBOW

SEPARATE CLAMP REQUIRED

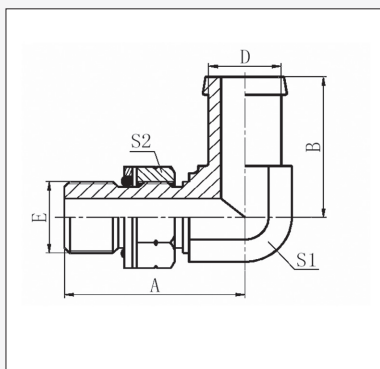

Product Code	BSPP Thread			Nominal ID			Dimensions mm				
	Thread E	Size	Pipe	Dash	Inch	DN	A	B	S1	S2	D
BPM9-1212L	3/4" - 14	12	3/4"	20	3/4"	12	50.5	56	27	32	19
BPM9-1216L	3/4" - 14	12	3/4"	25	1"	16	50.5	53	27	32	25.4
BPM9-1220L	3/4" - 14	12	3/4"	32	1.1/4"	20	50.3	60.6	32.9	33	31.8
BPM9-1616L	1" - 11	16	1"	25	1"	16	54.5	60	33	41	25.4
BPM9-1620L	1" - 11	16	1"	32	1.1/4"	20	58	64	41	41	31.8
BPM9-1624L	1" - 11	16	1"	38	1.1/2"	24	60	63.7	41.1	41	38.1
BPM9-2016L	1.1/4" - 11	20	1.1/4"	25	1"	16	59	59	41	50	25.4
BPM9-2020L	1.1/4" - 11	20	1.1/4"	32	1.1/4"	20	58	64	41	50	31.8
BPM9-2024L	1.1/4" - 11	20	1.1/4"	38	1.1/2"	24	60	63	41	50	38.1
BPM9-2420L	1.1/2" - 11	24	1.1/2"	32	1.1/4"	20	63	66	47	55	31.8
BPM9-2424L	1.1/2" - 11	24	1.1/2"	38	1.1/2"	24	61	68	47	55	38.1

UN'O' / SAE FLANGE


ORIGIN: NORTH AMERICA



L SERIES

UNM1


UN'O' MALE STRAIGHT
SEPARATE CLAMP REQUIRED

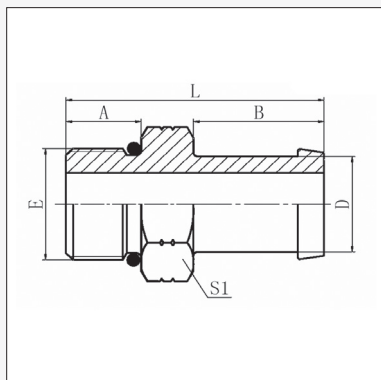

Product Code	UN'O' Thread			Nominal ID			Dimensions mm			
	Thread E	Size	Pipe	Dash	Inch	DN	A	B	L	S1
UNM1-1212L	3/4" - 16	12	08	20	3/4"	12	11.1	28	47	22
UNM1-1412L	7/8" - 14	14	10	20	3/4"	12	12.7	28	50.5	27
UNM1-1712L	1.1/16" - 12	17	12	20	3/4"	12	15.1	28	54	32
UNM1-1716L	1.1/16" - 12	17	12	25	1"	16	15.1	35	61	32
UNM1-2116L	1.5/16" - 12	21	16	25	1"	16	15.1	35	61	38
UNM1-2120L	1.5/16" - 12	21	16	32	1.1/4"	20	15.1	35	61	38
UNM1-2620L	1.5/8" - 12	26	20	32	1.1/4"	20	15.1	35	65	55
UNM1-2624L	1.5/8" - 12	26	20	38	1.1/2"	24	15.1	40	70	50
UNM1-3024L	1.7/8" - 12	30	24	38	1.1/2"	24	15.1	40	70	55

UNM9


UN'O' MALE 90° ELBOW
SEPARATE CLAMP REQUIRED

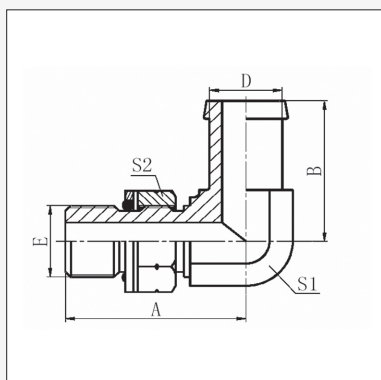

Product Code	UN'O' Thread			Nominal ID			Dimensions mm			
	Thread E	Size	Pipe	Dash	Inch	DN	A	B	S1	D
UNM9-1212L	3/4" - 16	12	08	20	3/4"	12	39.5	43	22	19
UNM9-1412L	7/8" - 14	14	10	20	3/4"	12	45	43	22	19
UNM9-1712L	1.1/16" - 12	17	12	20	3/4"	12	51	46	27	19
UNM9-1716L	1.1/16" - 12	17	12	25	1"	16	51	53	27	25.4
UNM9-2116L	1.5/16" - 12	21	16	25	1"	16	54.5	56.5	33	25.4
UNM9-2120L	1.5/16" - 12	21	16	32	1.1/4"	20	54.5	56.5	33	31.8
UNM9-2620L	1.5/8" - 12	26	20	32	1.1/4"	20	59.5	61	41	31.8
UNM9-2624L	1.5/8" - 12	26	20	38	1.1/2"	24	59.5	66.5	41	38.1

C619

CODE 61 90° ELBOW
SEPARATE CLAMP REQUIRED

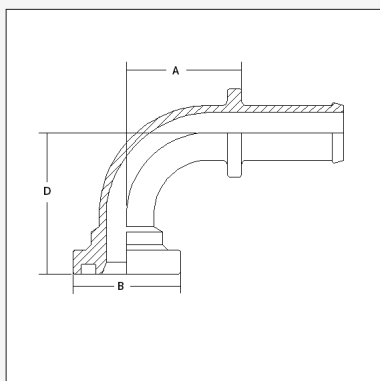

Product Code	Flange			Hose Bore			Dimensions(mm)		
	Bore	Size	Ø ins.	DN	Inch	Size	A	Ø B	D
C619-3224L	2"	32	2.13/16"	38	1.1/2"	24	98.4	71.4	91



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

UN'O' / CODE 61 FITTINGS


JIC

ORIGIN: NORTH AMERICA



JF1


JIC FEMALE STRAIGHT

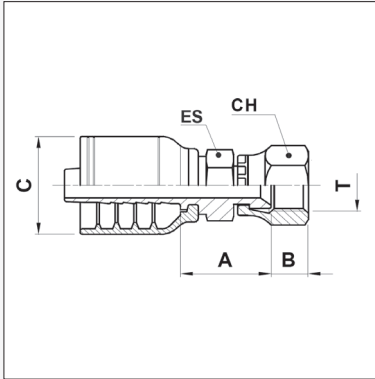


Product Code	JIC Thread			Nominal ID			Dimensions (mm / ")				
	T	Size	Pipe	DN	Inch	Size	A	B	CH	ES	C
JF1-0806G	1/2" - 20	08	05	10	5/16"	06	18.5	10.1	5/8"	1/2"	17.5
JF1-0906G	9/16" - 18	09	06	10	5/16"	06	21.3	10.1	11/16"	9/16"	17.5

NM1

NPT MALE STRAIGHT

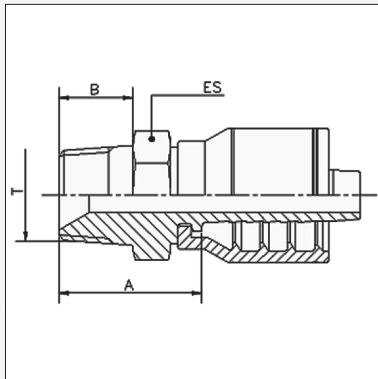


Product Code	NPT Thread		Nominal ID			Dimensions mm			
	T	Size	DN	Inch	Dash	A	B	ES	
NM1-0406G	1/4" - 18	04	10	5/16"	06	23.5	14	14	

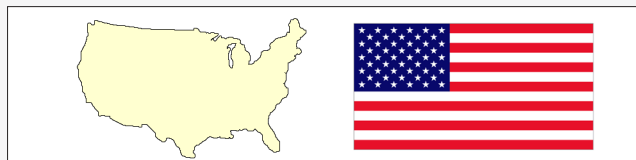

SF1


SAE FEMALE STRAIGHT

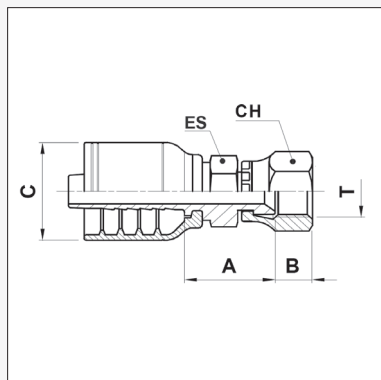

Product Code	SAE Thread			Hose Bore			Dimensions (mm / ")				
	Thread	Size	Tube	DN	Inch	Size	A	B	CH	ES	C
SF1-1006G	5/8" - 18	10	06	10	5/16"	06	17.2	10.7	3/4"	9/16"	17.5

SF4


SAE FEMALE 45° ELBOW

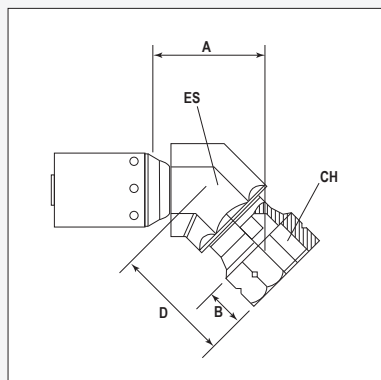

Product Code	SAE Thread			Hose Bore			Dimensions (mm / ")				
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH	ES
SF4-1006G	5/8" - 18	10	06	10	5/16"	06	25.2	10.9	29.2	3/4"	19

SF9

SAE FEMALE 90° ELBOW

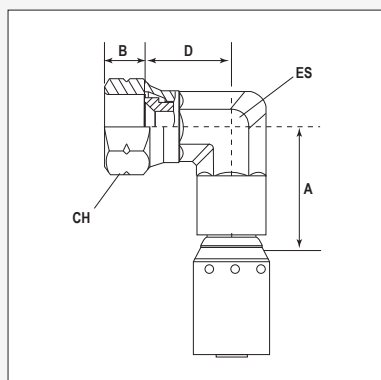


Product Code	SAE Thread			Hose Bore			Dimensions (mm / ")				
	Thread	Size	Tube	DN	Inch	Size	A	B	D	CH	ES
SF9-1006G	5/8" - 18	10	06	10	5/16"	06	29.3	10.9	19.8	3/4"	14

BSP

ORIGIN: GREAT BRITAIN



BF1

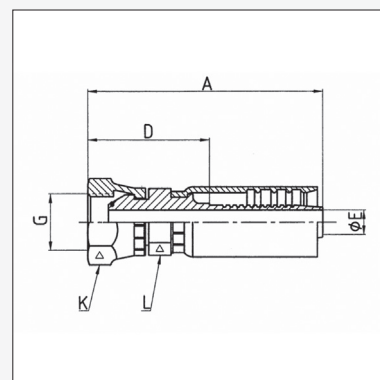
BSPP FEMALE STRAIGHT
INCORPORATES O-RING SEAL

Product Code	BSPP Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	G	Size	Pipe	DN	Inch	Size	A	D	L	K	Ø E	Synflex Code	Pusher 4599-
BF1-0202S7 †	1/8" - 28	02	1/8"	3	1/8"	02	40	26.6	14	14	2.08	90302-02P000	FP501
BF1-0403S7	1/4" - 19	04	1/4"	5	3/16"	03	54.8	35.8	14	19	2.77	90303-04B000	FP002
BF1-0404S7	1/4" - 19	04	1/4"	6	1/4"	04	58.8	32.8	14	19	3.96	90304-04B000	FP002
BF1-0606S7	3/8" - 19	06	3/8"	10	3/8"	06	67.8	35.8	17	22	7.14	90306-06B000	FP503
BF1-0808S7	1/2" - 14	08	1/2"	12	1/2"	08	77.4	39.4	22	27	9.93	90308-08B000	FP505
BF1-1212S7	3/4" - 14	12	3/4"	20	3/4"	12	86.9	43.9	28	32	15.88	90312-12B000	FP506
BF1-1616S7	1" - 11	16	1"	25	1"	16	101.7	44.7	36	41	20.65	90316-16B000	FP508

† Denotes O-Ring Seal not applicable on this fitting

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

BFC9

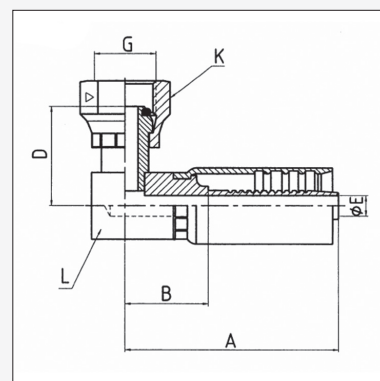BSPP FEMALE COMPACT 90° ELBOW
INCORPORATES O-RING SEAL

Product Code	BSPP Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	G	Size	Pipe	DN	Inch	Size	A	B	D	K	Ø E	Synflex Code	Pusher 4599-
BFC9-0404S7	1/4" - 19	04	1/4"	6	1/4"	04	48.2	22.4	23	18	3.96	90304-04B0B0	PC601
BFC9-0606S7	3/8" - 19	06	3/8"	10	3/8"	06	57.5	25.5	27	21	7.14	90306-06B0B0	PC602

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

NPT / NPSM


ORIGIN: NORTH AMERICA



S7 SERIES

NF1

NPSM FEMALE STRAIGHT

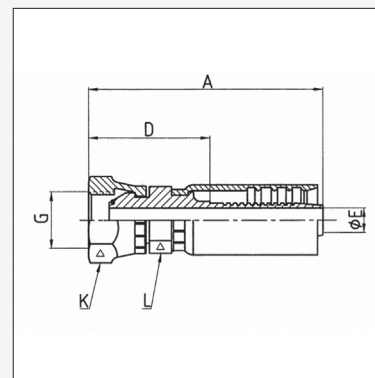


Product Code	NPSM Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	G	Size	Pipe	DN	Inch	Size	A	D	L	K	Ø E	Synflex Code	Pusher 4599-
NF1-0402S7	1/4" - 18	04	1/4"	3	1/8"	02	42.9	27	12.7	17.5	1.9	90302-042400	FP024
NF1-0403S7	1/4" - 18	04	1/4"	5	3/16"	03	52.7	28.6	15.9	19.1	2.8	90303-042400	FP002
NF1-0404S7	1/4" - 18	04	1/4"	6	1/4"	04	60.3	33.3	15.9	19.1	4.0	90304-042400	FP002
NF1-0606S7	3/8" - 18	06	3/8"	10	3/8"	06	67.5	30.2	15.9	19.1	7.1	90306-062400	FP004
NF1-0808S7	1/2" - 14	08	1/2"	12	1/2"	08	77.8	34.9	25.4	25.4	9.9	90308-082400	FP018

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

NM1

NPT MALE STRAIGHT

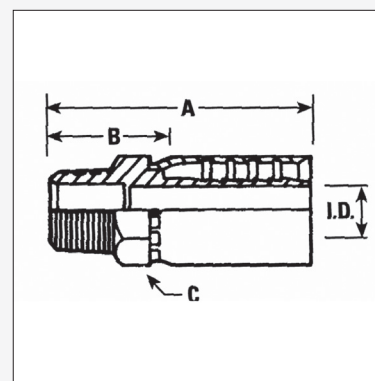

Product Code	NPT Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	C	ID		Synflex Code	Pusher 4599-
NM1-0202S7	1/8" - 27	2	1/8"	3	1/8"	2	34.1	19.1	12.7	1.9		90302-021000	MP023
NM1-0203S7	1/8" - 27	2	1/8"	5	3/16"	3	47.8	27.0	14.3	2.8		90303-021000	MP001
NM1-0603S7	3/8" - 18	6	3/8"	5	3/16"	3	54.7	34.9	19.1	2.8		90303-061000	MP005
NM1-0204S7	1/8" - 27	2	1/8"	6	1/4"	4	54.1	27.0	15.9	4.0		90304-021000	MP002
NM1-0403S7	1/4" - 18	4	1/4"	5	3/16"	3	52.3	31.8	17.5	2.8		90303-041000	MP004
NM1-0404S7	1/4" - 18	4	1/4"	6	1/4"	4	58.7	31.8	17.5	4.0		90304-041000	MP004
NM1-0604S7	3/8" - 18	6	3/8"	6	1/4"	4	61.1	33.3	19.1	4.0		90304-061000	MP005
NM1-0405S7	1/4" - 18	4	1/4"	8	5/16"	5	58.8	28.6	17.5	5.6		90305-041000	MP004
NM1-0406S7	1/4" - 18	4	1/4"	10	3/8"	6	65.8	33.3	19.1	7.1		90306-041000	MP005
NM1-0606S7	3/8" - 18	6	3/8"	10	3/8"	6	65.8	33.3	19.1	7.1		90306-061000	MP005
NM1-0806S7	1/2" - 14	8	1/2"	10	3/8"	6	72.2	39.7	23.8	7.1		90306-081000	MP009
NM1-0808S7	1/2" - 14	8	1/2"	12	1/2"	8	77.0	38.1	23.8	9.9		90308-081000	MP009
NM1-1212S7	3/4" - 14	12	3/4"	20	3/4"	12	81.8	34.9	28.6	15.9		90312-121000	MP011
NM1-1616S7	1" - 11 1/2	16	1"	25	1"	16	100.8	41.3	34.9	20.6		90316-161000	MP013

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

NPT / NPSM FITTINGS

131
C


NPT / NPSM

ORIGIN: NORTH AMERICA



NMS1

NPT SWIVEL MALE STRAIGHT




Product Code	NPT Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	C	D	ID	Synflex Code	Pusher 4599-
NMS1-0404S7	1/4" - 18	4	1/4"	6	1/4"	4	72.9	46.0	15.9	17.5	4.0	90304-041400	MP003
NMS1-0606S7	3/8" - 18	6	3/8"	10	3/8"	6	80.0	42.9	19.0	19.0	7.1	90306-061400	MP006

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.



JF1

JIC FEMALE STRAIGHT

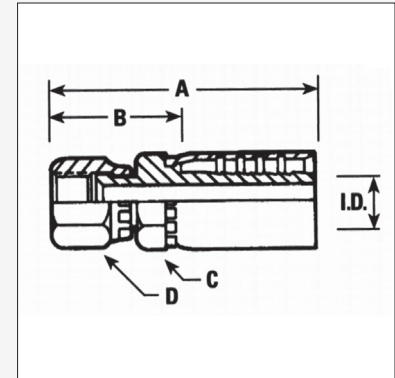

Product Code	JIC / SAE Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	C	D	ID	Synflex Code	Pusher 4599-
JF1-0602S7	3/8" - 24	06	03	3	1/8"	02	41.9	36.5	12.7	14.3	2.0	90302-035400	FP017
JF1-0702S7	7/16" - 20	07	04	3	1/8"	02	43.5	27.0	12.7	15.9	2.0	90302-045400	FP010
JF1-0703S7 †	7/16" - 20	07	04	5	3/16"	03	54.8	34.9	14.3	15.9	2.8	90303-045400	FP011
JF1-0803S7 †	1/2" - 20	08	05	5	3/16"	03	54.8	34.9	14.3	19.1	2.8	90303-055400	FP001
JF1-0704S7 †	7/16" - 20	07	04	6	1/4"	04	64.3	36.5	15.9	15.9	4.0	90304-045400	FP012
JF1-0804S7 †	1/2" - 20	08	05	6	1/4"	04	64.3	36.5	15.9	19.1	4.0	90304-055400	FP013
JF1-0904S7	9/16" - 18	09	06	6	1/4"	04	64.3	36.5	15.9	19.1	4.0	90304-065500	FP013
JF1-0805S7 †	1/2" - 20	08	05	8	5/16"	05	64.3	31.8	15.9	19.1	5.6	90305-055400	FP013
JF1-0905S7	9/16" - 18	09	06	8	5/16"	05	64.3	34.9	15.9	19.1	5.6	90305-065500	FP013
JF1-0906S7	9/16" - 18	09	06	10	3/8"	06	71.5	38.1	19.1	19.1	7.1	90306-065500	FP015
JF1-1206S7 †	3/4" - 16	12	08	10	3/8"	06	71.5	34.9	19.1	23.8	7.1	90306-085400	FP005
JF1-1208S7 †	3/4" - 16	12	08	12	1/2"	08	80.2	41.3	22.2	23.8	9.9	90308-085400	FP016
JF1-1408S7 †	7/8" - 14	14	10	12	1/2"	08	80.2	41.3	22.2	27.0	9.9	90308-105400	FP006
JF1-1712S7	1.1/16" - 12	17	12	20	3/4"	12	87.3	41.3	28.6	31.9	15.9	90312-125500	FP008
JF1-2116S7	1.5/16" - 12	21	16	25	1"	16	103.2	42.9	34.9	38.1	20.6	90316-165500	FP009
STAINLESS STEEL FITTINGS													
JF1SS-0704S7†	7/16" - 20	07	04	6	1/4"	04	64.3	36.5	15.9	15.9	4.0	90A04-045400	FP012
JF1SS-0906S7	9/16" - 18	09	06	10	3/8"	06	71.5	38.1	19.1	19.1	7.1	90A06-065500	FP015
JF1SS-1208S7†	3/4" - 16	12	08	12	1/2"	08	80.2	41.3	22.2	23.8	9.9	90A08-085400	FP016

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

† Please note that the fittings with the Product and Synflex Codes shown in Bold Italics have double seats that make them compatible with both JIC 37° and SAE 45° male connectors


JIC

ORIGIN: NORTH AMERICA



JM1

JIC MALE STRAIGHT

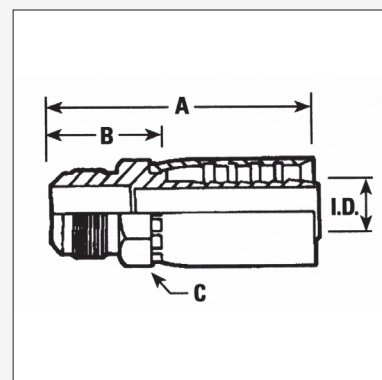


Product Code	JIC Thread			Nominal ID			Dimensions mm				Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	C	ID	Synflex Code	Pusher 4599-
JM1-0703S7	7/16" - 20	7	4	5	3/16"	3	52.1	31.8	14.3	2.8	90303-045000	MP001
JM1-0704S7	7/16" - 20	7	4	6	1/4"	4	58.4	31.8	15.9	4.0	90304-045000	MP002
JM1-0904S7	9/16" - 18	9	6	6	1/4"	4	61.0	33.5	19.1	4.0	90304-065000	MP005
JM1-0905S7	9/16" - 18	9	6	8	5/16"	5	58.4	33.3	17.5	5.6	90305-065000	MP004
JM1-0906S7	9/16" - 18	9	6	10	3/8"	6	65.7	34.9	19.1	7.1	90306-065000	MP005
JM1-1206S7	3/4" - 16	12	8	10	3/8"	6	68.3	34.9	20.6	7.1	90306-085000	MP007
JM1-1208S7	3/4" - 16	12	8	12	1/2"	8	73.1	36.5	22.2	9.9	90308-085000	MP008
JM1-1408S7	7/8" - 14	14	10	12	1/2"	8	78.8	36.5	23.8	9.9	90308-105000	MP009
JM1-1712S7	1.1/16"-12	17	12	20	3/4"	12	84.4	38.1	28.6	15.5	90312-125000	MP011

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

JF4

JIC FEMALE 45° ELBOW

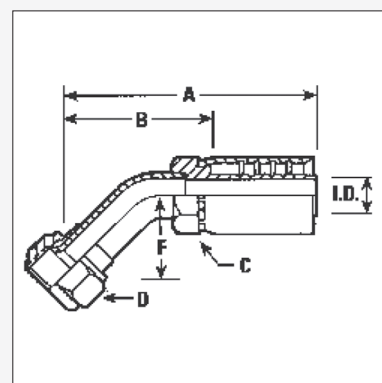

Product Code	JIC Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	F	D	ID	Synflex Code	Pusher 4599-
JF4-0704S7	7/16" - 20	7	4	6	1/4"	4	64.8	38.1	11.9	14.3	4.0	90304-045540	TP204
JF4-0804S7	1/2" - 20	08	05	6	1/4"	04	69.4	41.3	13.4	15.9	4.0	90304-055540	TP205
JF4-0905S7	9/16" - 18	9	6	8	5/16"	5	79.0	49.2	9.9	17.5	5.6	90305-065540	TP206
JF4-0906S7	9/16" - 18	9	6	10	3/8"	6	83.8	49.2	9.9	17.5	7.1	90306-065540	TP206
JF4-1206S7	3/4" - 16	12	8	10	3/8"	6	89.9	57.2	14.0	22.2	7.1	90306-085540	TP208
JF4-1208S7	3/4" - 16	12	8	12	1/2"	8	83.4	41.3	18.1	22.2	9.9	90308-085540	TP308

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

JIC



ORIGIN: NORTH AMERICA



S7 SERIES

JF9 / JF9L

JIC FEMALE 90° ELBOW
INCLUDING LONG DROPS

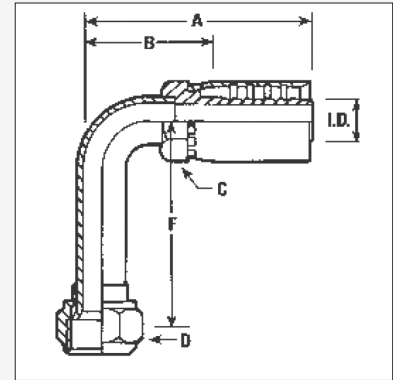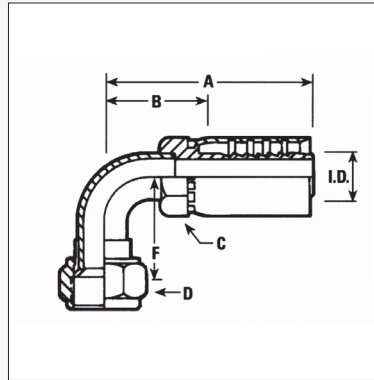


Product Code	JIC Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	F	D	ID	Synflex Code	Pusher 4599-
JF9-0703S7	7/16" - 20	7	4	5	3/16"	3	64.8	42.9	17.3	14.3	2.8	90303-0455S0	TP204
JF9-0704S7	7/16" - 20	7	4	6	1/4"	4	70.0	42.9	17.3	14.3	4.0	90304-0455S0	TP204
JF9-0804S7	1/2" - 20	8	5	6	1/4"	4	60.3	33.3	25.4	15.9	4.0	90304-0555S0	TP205
JF9-0905S7	9/16" - 18	9	6	8	5/16"	5	77.7	47.6	28.6	17.5	5.6	90305-0655S0	TP206
JF9-0906S7	9/16" - 18	9	6	10	3/8"	6	82.6	49.2	21.6	17.5	7.1	90306-0655S0	TP206
JF9-1206S7	3/4" - 16	12	8	10	3/8"	6	84.8	50.8	27.7	22.2	7.1	90306-0855S0	TP208
JF9-1208S7	3/4" - 16	12	8	12	1/2"	8	89.7	49.2	27.7	22.2	9.9	90308-0855S0	TP308
JF9-1408S7	7/8" - 14	14	10	12	1/2"	8	95.0	55.6	31.2	25.4	9.9	90308-1055S0	TP310
JF9-1712S7	1.1/16"-12	17	12	20	3/4"	12	98.4	52.4	58.7	31.8	15.9	90312-1255S0	TP312
LONG DROP ELBOWS													
JFL9-0704S7	7/16" - 20	7	4	6	1/4"	4	58.7	31.7	45.7	14.3	4.0	90304-0455L0	TP204
JFL9-0906S7	9/16" - 18	9	6	10	3/8"	6	82.3	49.2	55.4	17.5	7.1	90306-0655L0	TP206
JFL9-1206S7	3/4" - 16	12	8	10	3/8"	6	69.9	33.3	61.7	22.2	7.1	90306-0855L0	TP208

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

SF1

SAE FEMALE STRAIGHT

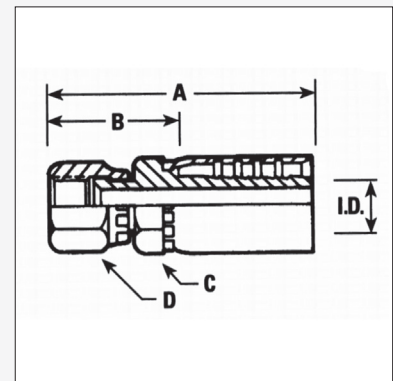

Product Code	SAE Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	C	D	ID	Synflex Code	Pusher 4599-
SF1-1005S7	5/8" - 18	10	06	8	5/16"	05	64.3	31.8	15.9	20.6	5.6	90305-06A000	FP003
SF1-1006S7	5/8" - 18	10	06	10	3/8"	06	71.5	34.9	19.1	20.6	7.1	90306-06A000	FP014
SF1-1712S7	1.1/16" - 14	17	12	20	3/4"	12	87.3	41.3	28.6	31.8	15.9	90312-12A000	FP008

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

JIC / SAE FITTINGS


ORFS

ORIGIN: NORTH AMERICA



OF1

ORFS FEMALE STRAIGHT




Product Code	ORFS Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	C	D	ID	Synflex Code	Pusher 4599-
OF1-0404S7	9/16" - 18	4	4	6	1/4"	4	66.0	38.1	15.9	17.5	4.0	90304-044000	MP045
OF1-0606S7	11/16" - 16	6	6	10	3/8"	6	69.9	36.5	19.1	22.2	7.1	90306-064000	SP031
OF1-0808S7	13/16" - 16	8	8	12	1/2"	8	79.4	39.7	23.8	27.0	9.9	90308-084000	FP040

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

OF9

ORFS FEMALE 90° ELBOW




Product Code	ORFS Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	D	F	ID	Synflex Code	Pusher 4599-
OF9-0404S7	9/16" - 18	4	4	6	1/4"	4	58.7	31.7	17.5	19.8	4.0	90304-0440S0	TP204
OF9-0606S7	11/16" - 16	6	6	10	3/8"	6	83.8	50.8	20.6	22.9	7.1	90306-0640S0	TP206
OF9-0808S7	13/16" - 16	8	8	12	1/2"	8	77.3	38.1	23.8	29.2	9.9	90308-0840S0	TP308

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.



DLF1 / DSF1

DKL LIGHT / DKS HEAVY
FEMALE STRAIGHT

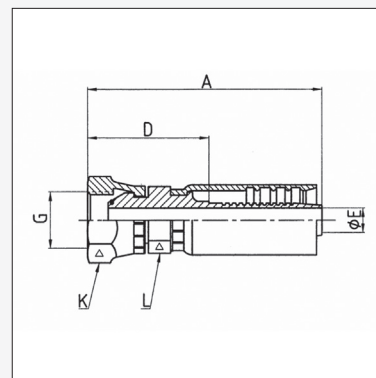


Product Code	Metric Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	G	Size	Pipe	DN	Inch	Size	A	D	L	K	Ø E	Synflex Code	Pusher 4599-
DLF1 LIGHT SERIES (DKL)													
DLF1-1604S7	M16 x 1.5	16	10L	6	1/4"	04	60	34.7	17	19	4	90304-16JL00	FP503
DLF1-1605S7	M16 x 1.5	16	10 L	08	5/16"	05	63	35	17	19	5.6	90305-16JL00	FP503
DLF1-1805S7	M18 x 1.5	18	12 L	08	5/16"	05	63	35	17	22	5.6	90305-18JL00	FP503
DLF1-1806S7	M18 x 1.5	18	12 L	10	3/8"	06	67.8	35.8	17	22	7.1	90306-18JL00	FP503
DSF1 HEAVY SERIES (DKS)													
DSF1-2005S7	M20 x 1.5	20	12 S	08	5/16"	05	64.7	36.7	18	24	5.6	90305-20JL00	FP504

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

DSM1

DKS HEAVY
MALE STRAIGHT

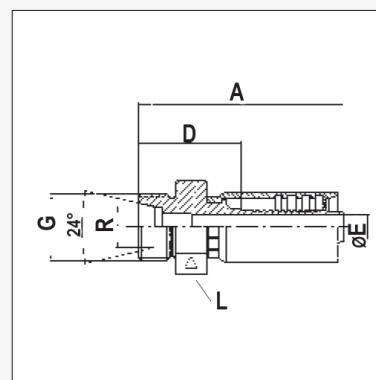

Product Code	DKS Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	G	Size	Pipe	DN	Inch	Size	A	D	L	R	Ø E	Synflex Code	Pusher 4599-
DSM1 HEAVY SERIES (DKS)													
DSM1-2005S7	M20 x 1.5	20	12 S	08	5/16"	05	61.6	33.6	24	12	5.6	90305-20SS00	MP505
DSM1-1806S7	M18 x 1.5	18	10S	10	3/8"	06	63.5	31.5	22	12	7.1	90306-18SL00	MP504

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

INFORMATION:


DKL = Dicht Kegel Leicht meaning Sealing Cone Light (Cone included angle is 24°)
DKS = Dicht Kegel Schwer meaning Sealing Cone Heavy (Cone included angle is 24°)

STANDPIPES

ORIGIN: GERMANY




SPM1

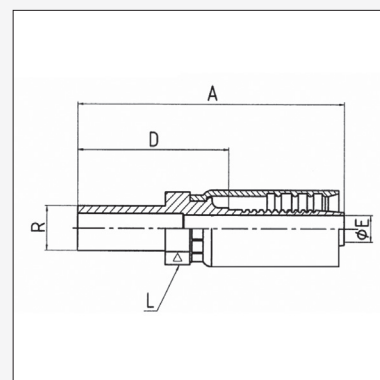METRIC STANDPIPE
STRAIGHT

Product Code	Standpipe			Nominal ID			Dimensions mm					Synflex Data ^a	
	R	Size	Pipe	DN	Inch	Size	A	D	L	R	Ø E	Synflex Code	Pusher 4599-
SPM1-0603S7	6	06	6 L/S	05	3/16"	03	58.3	39.3	14	6	2.8	90303-06N000	MP501
SPM1-0804S7	8	08	8 L/S	06	1/4"	04	64.4	38.4	14	8	4.0	90304-08N000	MP501
SPM1-1004S7	10	10	10 L/S	06	1/4"	04	66.4	40.4	14	10	4.0	90304-10N000	MP501
SPM1-1005S7	10	10	10 L/S	08	5/16"	05	70.6	42.6	17	10	5.6	90305-10N000	MP502
SPM1-1006S7	10	10	10 L/S	10	3/8"	06	75.5	43.5	17	10	7.1	90306-10N000	MP502
SPM1-1205S7	12	12	12 L/S	08	5/16"	05	71.6	43.6	17	12	5.6	90305-12N000	MP502
SPM1-1206S7	12	12	12 L/S	10	3/8"	06	76.5	44.5	17	12	7.1	90306-12N000	MP502
SPM1-1508S7	15	15	15 L	12	1/2"	08	85.3	47.3	22	15	9.9	90308-15N000	MP504
SPM1-1608S7	16	16	16 S	12	1/2"	08	87.3	49.3	22	16	9.9	90308-16N000	MP504
SPM1-1808S7	18	18	18 L	16	5/8"	10	88.3	50.3	22	18	9.9	90308-18N000	MP504

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

SPM4

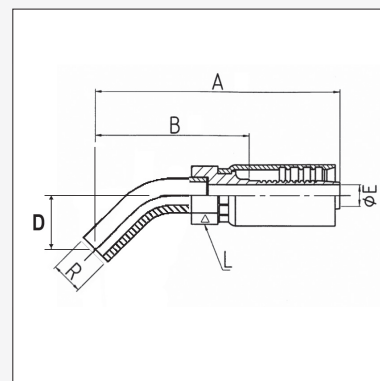METRIC STANDPIPE
45° ELBOW

Product Code	Standpipe			Nominal ID			Dimensions mm					Synflex Data ^a	
	R	Size	Pipe	DN	Inch	Size	A	B	L	D	R	Synflex Code	Pusher 4599-
SPM4-0603S7	6	06	6 L/S	05	3/16"	03	65.4	46.4	14	18.4	6	90303-06N040	TP204
SPM4-1004S7	10	10	10 L/S	06	1/4"	04	74	48	17	21.1	10	90304-10N040	TP206
SPM4-1005S7	10	10	10 L/S	08	5/16"	05	76	48	17	21.1	10	90305-10N040	TP206
SPM4-1205S7	12	12	12 L/S	08	5/16"	05	79.6	51.6	17	23	12	90305-12N040	TP210
SPM4-1206S7	12	12	12 L/S	10	3/8"	06	84.5	52.5	17	23	12	90306-12N040	TP210
SPM4-1808S7	18	18	18 L	16	5/8"	10	102	64	28	27	18	90308-18N040	TP312

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

STANDPIPES

ORIGIN: GERMANY




S7 SERIES

SPM9

METRIC STANDPIPE

90° ELBOW

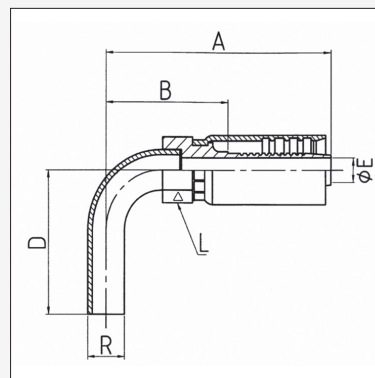

Product Code	Standpipe			Nominal ID			Dimensions mm					Synflex Data ^a	
	R	Size	Pipe	DN	Inch	Size	A	B	L	D	R	Synflex Code	Pusher 4599-
SPM9-0603S7	6	06	6 L/S	05	3/16"	03	53	34	14	32	6	90303-06N090	TP204
SPM9-0804S7	8	08	8 L/S	06	1/4"	04	59	33	17	34	8	90304-08N090	TP205
SPM9-1004S7	10	10	10 L/S	06	1/4"	04	61	35	17	38	10	90304-10N090	TP206
SPM9-1005S7	10	10	10 L/S	08	5/16"	05	63.2	35.2	17	38	10	90305-10N090	TP206
SPM9-1205S7	12	12	12 L/S	08	5/16"	05	67.2	39.2	17	43	12	90305-12N090	TP210
SPM9-1206S7	12	12	12 L/S	10	3/8"	06	72	40	17	43	12	90306-12N090	TP210
SPM9-1508S7	15	15	15 L	12	1/2"	08	82	44	22	48	15	90308-15N090	TP310
SPM9-1808S7	18	18	18 L	16	5/8"	10	91	53	28	54	18	90308-18N090	TP312

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

STANDPIPES




This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

BSP

ORIGIN: GREAT BRITAIN




BF1

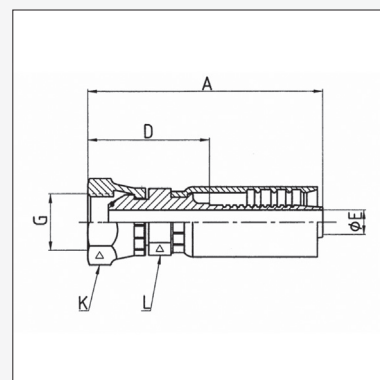BSPP FEMALE STRAIGHT
INCORPORATES O-RING SEAL

Product Code	BSPP Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	G	Size	Pipe	DN	Inch	Size	A	D	L	K	Ø E	Synflex Code	Pusher 4599-
BF1-0404S8	1/4" - 19	04	1/4"	6	1/4"	04	58.8	32.8	14	19	3.96	90H04-04B000	FP002
BF1-0606S8	3/8" - 19	06	3/8"	10	3/8"	06	67.8	35.8	17	22	7.14	90H06-06B000	FP503
BF1-0808S8	1/2" - 14	08	1/2"	12	1/2"	08	77.4	39.4	22	27	9.93	90H08-08B000	FP505
BF1-1212S8	3/4" - 14	12	3/4"	20	3/4"	12	86.9	43.9	28	32	15.88	90H12-12B000	FP506
BF1-1616S8	1" - 11	16	1"	25	1"	16	101.7	44.7	36	41	20.65	90H16-16B000	FP508

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

BFC9

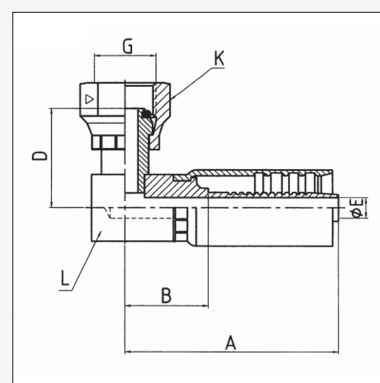BSPP FEMALE COMPACT 90° ELBOW
INCORPORATES O-RING SEAL

Product Code	BSPP Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	G	Size	Pipe	DN	Inch	Size	A	B	D	K	Ø E	Synflex Code	Pusher 4599-
BFC9-0606S8	3/8" - 19	06	3/8"	10	3/8"	06	57.5	25.5	27	21	7.14	90H06-06B0B0	PC602

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

NPT / NPSM


ORIGIN: NORTH AMERICA



S8 SERIES

NF1

NPSM FEMALE STRAIGHT

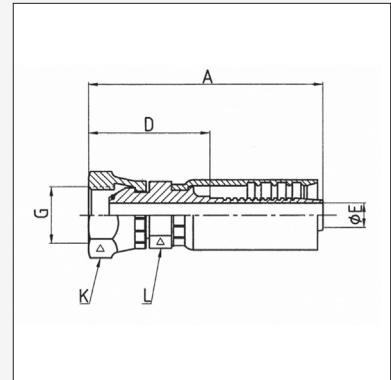


Product Code	NPSM Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	G	Size	Pipe	DN	Inch	Size	A	D	L	K	Ø E	Synflex Code	Pusher 4599-
NF1-0404S8	1/4" - 18	04	1/4"	6	1/4"	04	60.3	33.3	15.9	19.1	4.0	90H04-042400	FP002
NF1-0606S8	3/8" - 18	06	3/8"	10	3/8"	06	67.5	30.2	15.9	19.1	7.1	90H06-062400	FP004
NF1-0808S8	1/2" - 14	08	1/2"	12	1/2"	08	77.8	34.9	25.4	25.4	9.9	90H08-082400	FP018
NF1-1616S8	1" - 11½	16	1"	25	1"	16	103.1	42.9	34.9	38.1	20.6	90H16-162400	FP009

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

NM1

NPT MALE STRAIGHT

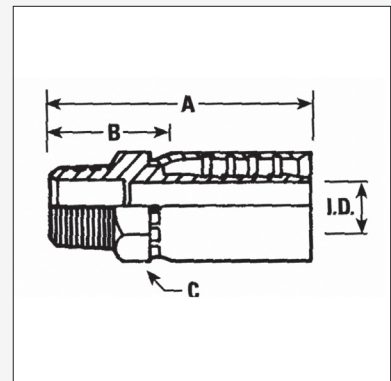

Product Code	NPT Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	C	ID		Synflex Code	Pusher 4599-
NM1-0403S8	1/4" - 18	4	1/4"	5	3/16"	3	52.3	31.8	17.5	2.8		90H03-041000	MP004
NM1-0606S8	3/8" - 18	6	3/8"	10	3/8"	6	65.8	33.3	19.1	7.1		90H06-061000	MP005
NM1-0608S8	3/8" - 18	6	3/8"	12	1/2"	8	70.7	31.7	22.2	9.9		90H08-061000	MP008
NM1-0808S8	1/2" - 14	8	1/2"	12	1/2"	8	77.0	38.1	23.8	9.9		90H08-081000	MP009
NM1-1212S8	3/4" - 14	12	3/4"	20	3/4"	12	81.8	34.9	28.6	15.9		90H12-121000	MP011
NM1-1616S8	1" - 11½	16	1"	25	1"	16	100.8	41.3	34.9	20.6		90H16-161000	MP013

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.


JIC

ORIGIN: NORTH AMERICA



JF1

JIC FEMALE STRAIGHT

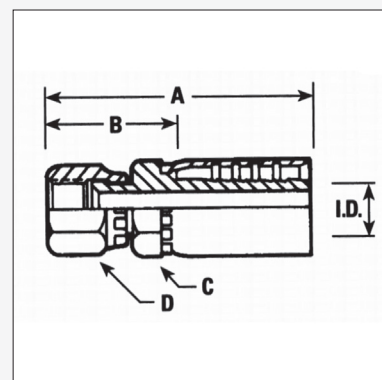


Product Code	JIC Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	C	D	ID	Synflex Code	Pusher 4599-
JF1-0703S8	7/16" - 20	07	04	5	3/16"	03	54.8	34.9	14.3	15.9	2.8	90H03-045400	FP011
JF1-0704S8	7/16" - 20	07	04	6	1/4"	04	64.3	36.5	15.9	15.9	4.0	90H04-045400	FP012
JF1-0904S8	9/16" - 18	09	06	6	1/4"	04	64.3	36.5	15.9	19.1	4.0	90H04-065500	FP013
JF1-0906S8	9/16" - 18	09	06	10	3/8"	06	71.5	38.1	19.1	19.1	7.1	90H06-065500	FP015
JF1-1206S8	3/4" - 16	12	08	10	3/8"	06	71.5	34.9	19.1	23.8	7.1	90H06-085400	FP005
JF1-1208S8	3/4" - 16	12	08	12	1/2"	08	80.2	41.3	22.2	23.8	9.9	90H08-085400	FP016
JF1-1408S8	7/8" - 14	14	10	12	1/2"	08	80.2	41.3	22.2	27.0	9.9	90H08-105400	FP006
JF1-1710S8	1.1/16" - 12	17	12	16	5/8"	10	87.7	42.3	28.6	31.9	11.9	90H10-125500	FP008
JF1-1712S8	1.1/16" - 12	17	12	20	3/4"	12	87.3	41.3	28.6	31.9	15.9	90H12-125500	FP008
JF1-2116S8	1.5/16" - 12	21	16	25	1"	16	103.2	42.9	34.9	38.1	20.6	90H16-165500	FP009

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

JM1

JIC MALE STRAIGHT

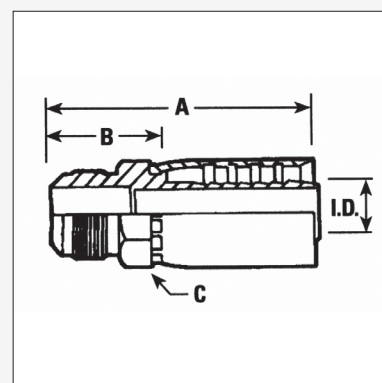

Product Code	JIC Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	C	ID		Synflex Code	Pusher 4599-
JM1-0906S8	9/16" - 18	9	6	10	3/8"	6	65.7	28.6	19.1	7.1		90H06-065000	MP005
JM1-1206S8	3/4" - 16	12	8	10	3/8"	6	68.3	31.8	20.6	7.1		90H06-085000	MP007
JM1-1208S8	3/4" - 16	12	8	12	1/2"	8	73.1	31.8	22.2	9.9		90H08-085000	MP008


^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

JIC
ORIGIN: NORTH AMERICA



S8 SERIES

JF9
JIC FEMALE 90° ELBOW

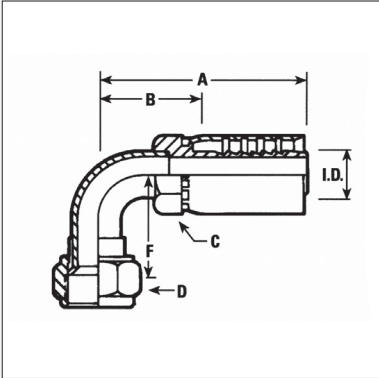

Product Code	JIC Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	F	D	ID	Synflex Code	Pusher 4599-
JF9-0704S8	7/16" - 20	7	4	6	1/4"	4	70.0	42.9	17.3	14.3	4.0	90H04-0455S0	TP204
JF9-1206S8	3/4" - 16	12	8	10	3/8"	6	84.8	50.8	27.7	22.2	7.1	90H08-0855S0	TP208

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

JIC FITTINGS


SAE

ORIGIN: NORTH AMERICA



SF1

SAE FEMALE STRAIGHT

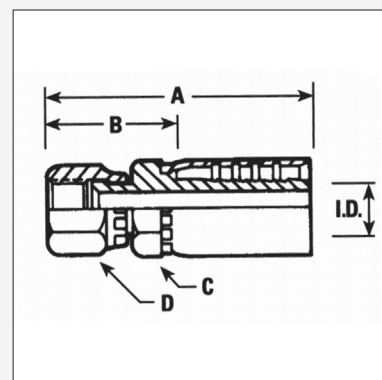


Product Code	JIC Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	C	D	ID	Synflex Code	Pusher 4599-
SF1-1006S8	5/8" - 18	10	06	10	3/8"	06	71.5	34.9	19.1	20.6	7.1	90H06-06A000	FP014

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.



DLF1

DKL LIGHT
FEMALE STRAIGHT

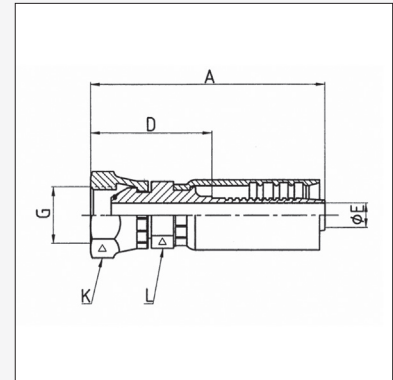


Product Code	Metric Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	G	Size	Pipe	DN	Inch	Size	A	D	L	K	Ø E	Synflex Code	Pusher 4599-
DLF1-1806S8	M18 x 1.5	18	12 L	10	3/8"	06	63	35.8	17	22	7.1	90H06-18JL00	FP503
DLF1-2208S8	M22 x 1.5	22	15 L	12	1/2"	08	77.4	39	22	27	9.9	90H08-22JL00	FP505

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

DLM1

DKL LIGHT
MALE STRAIGHT

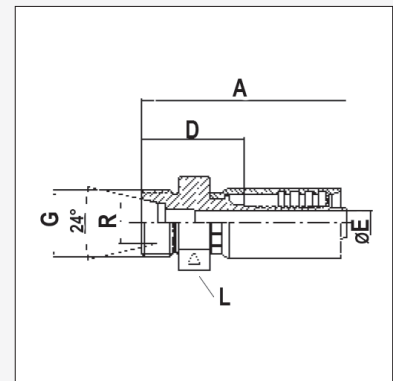


Product Code	DKS Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	G	Size	Pipe	DN	Inch	Size	A	D	L	R	Ø E	Synflex Code	Pusher 4599-
DLM1-2206S8	M22 x 1.5	22	15 L	10	3/8"	06	66.5	34.5	26	15	7.1	90H06-22SL00	MP506

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

METRIC
ORIGIN: GERMANY




DSF1
DKS HEAVY
FEMALE STRAIGHT

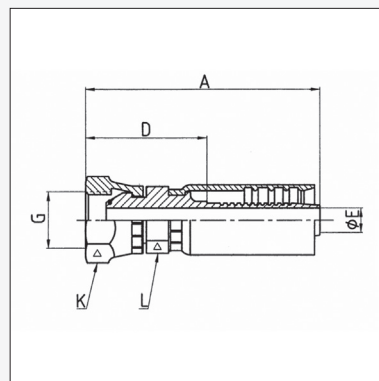

Product Code	Metric Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	G	Size	Pipe	DN	Inch	Size	A	D	L	K	Ø E	Synflex Code	Pusher 4599-
DSF1-2006S8	M20 x 1.5	20	12 S	10	3/8"	06	69.5	37.5	18	24	7.1	90H06-20JS00	FP504

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

DSM1
DKS HEAVY
MALE STRAIGHT

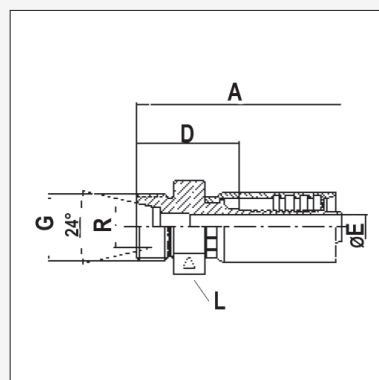

Product Code	DKS Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	G	Size	Pipe	DN	Inch	Size	A	D	L	R	Ø E	Synflex Code	Pusher 4599-
DSM1-2006S8	M20 x 1.5	20	12 S	10	3/8"	06	66.5	34.5	24	12	7.1	90H06-20SS00	MP505

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

STANDPIPES


ORIGIN: GERMANY



S8 SERIES

SPM1

METRIC STANDPIPE
STRAIGHT

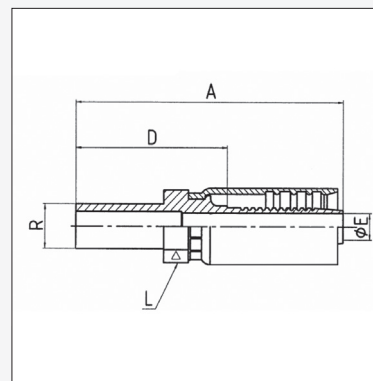


Product Code	Standpipe			Nominal ID			Dimensions mm					Synflex Data ^a	
	R	Size	Pipe	DN	Inch	Size	A	D	L	R	Ø E	Synflex Code	Pusher 4599-
SPM1-1004S8	10	10	10 L/S	06	1/4"	04	66.4	40.4	14	10	4.0	90H04-10N000	MP501
SPM1-1206S8	12	12	12 L/S	10	3/8"	06	76.5	44.5	17	12	7.1	90H06-12N000	MP502
SPM1-1508S8	15	15	15 L	12	1/2"	08	85.3	47.3	22	15	9.9	90H08-15N000	MP504

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

SPM4

METRIC STANDPIPE
45° ELBOW

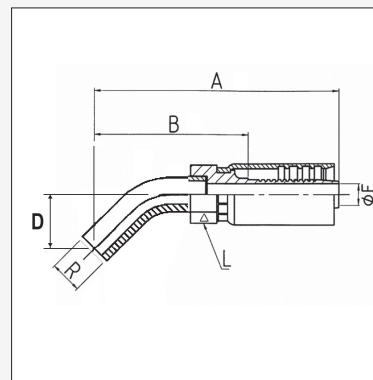


Product Code	Standpipe			Nominal ID			Dimensions mm					Synflex Data ^a	
	R	Size	Pipe	DN	Inch	Size	A	B	L	D	R	Synflex Code	Pusher 4599-
SPM4-1004S8	10	10	10 L/S	06	1/4"	04	74	48	17	21.1	10	90H04-10N040	TP206

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.


SPM9

METRIC STANDPIPE
90° ELBOW

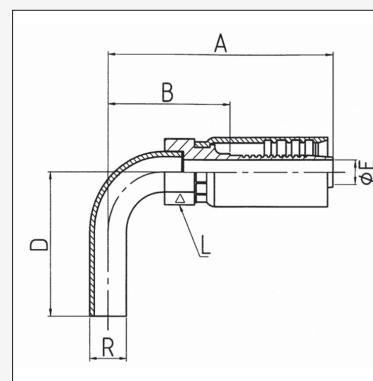

Product Code	Standpipe			Nominal ID			Dimensions mm					Synflex Data ^a	
	R	Size	Pipe	DN	Inch	Size	A	B	L	D	R	Synflex Code	Pusher 4599-
SPM9-1004S8	10	10	10 L/S	06	1/4"	04	61	35	17		10	90H04-10N090	TP206
SPM9-1206S8	12	12	12 L/S	10	3/8"	06	72	40	17		12	90H06-12N090	TP210
SPM9-1508S8	15	15	15 L	12	1/2"	08	82	44	22		15	90H08-15N090	TP310

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice

STANDPIPES


JIC

ORIGIN: NORTH AMERICA



JF1

JIC FEMALE STRAIGHT

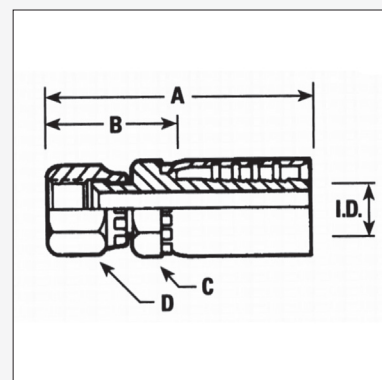

Product Code	JIC Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	C	D	ID	Synflex Code	Pusher 4599-
JF1-1410S18	7/8" - 14	14	10	16	5/8"	10	87.8	47.6	28.6	27.0	11.9	90N10-105400	FP021
JF1-1710S18	1.1/16" - 12	17	12	16	5/8"	10	87.8	47.6	28.6	31.8	11.9	90N10-125500	FP008

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

FITTINGS TO SUIT 3VEO

ASSEMBLY BY ACCREDITED PERSONS



SV SERIES


JIC / NPT FITTINGS



All SV Series fittings must be assembled only by accredited personnel

JF1

JIC FEMALE STRAIGHT

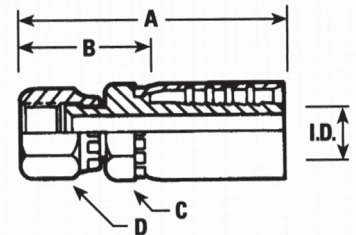


Product Code	JIC Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	C	D	ID	Synflex Code	Pusher 4599-
JF1-0704SV	7/16" - 20	07	04	6	1/4"	04	64.3	36.5	15.9	15.9	3.6	90V04-045400	FP012
JF1-0906SV	9/16" - 18	09	06	10	3/8"	06	74.2	41.3	19.1	19.1	6.8	90V06-065500	FP015
STAINLESS STEEL FITTINGS													
JF1SS-0704SV	7/16" - 20	07	04	6	1/4"	04	64.3	36.5	15.9	15.9	3.6	9CV04-045400	FP012
JF1SS-0906SV	9/16" - 18	09	06	10	3/8"	06	74.2	41.3	19.1	19.1	6.8	9DV06-065500	FP015

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

NM1

NPT MALE STRAIGHT

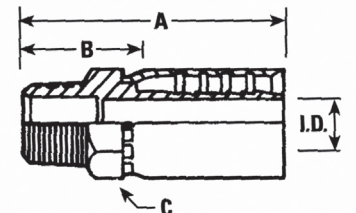

Product Code	NPT Thread			Nominal ID			Dimensions mm					Synflex Data ^a	
	Thread	Size	Pipe	DN	Inch	Size	A	B	C	ID		Synflex Code	Pusher 4599-
NM1-0404SV	1/4" - 18	4	1/4"	6	1/4"	04	58.7	31.8	17.5	3.6		90V04-041000	MP004
NM1-0406SV	1/4" - 18	4	1/4"	10	3/8"	06	68.6	34.9	19.1	6.8		90V06-041000	MP005
NM1-0604SV	3/8" - 18	6	3/8"	6	1/4"	04	61.1	33.3	19.1	3.6		90V04-061000	MP005
NM1-0606SV	3/8" - 18	6	3/8"	10	3/8"	06	68.6	34.9	19.1	6.8		90V06-061000	MP005
STAINLESS STEEL FITTINGS													
NM1SS-0606SV	3/8" - 18	6	3/8"	10	3/8"	06	68.6	34.9	19.1	6.8		9CV06-061000	MP005

^a The requisite Synflex Die is dependent on which hose is used. Refer to Catalogue Section B Thermoplastic Hoses for the appropriate Synflex Die No.

Stainless Steel fittings are Grade 316



This page is part of a complete catalogue containing technical and safety data.
All data must be reviewed when selecting a product.
Pirtek reserve the right to change technical specifications without notice